

Civil Engineering and Development Department

Trunk Road T2 Monthly Environmental Monitoring and Audit Report (under EP-458/2013/C) August 2024 (Version 1.0)

Approved By 
(Environmental Team Leader:
Mr. KS Lee)

REMARKS:

The information supplied and contained within this report is, to the best of our knowledge, correct at the time of printing.

CINOTECH accepts no responsibility for changes made to this report by third parties

CINOTECH CONSULTANTS LTD
Room 1710, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong
Tel: (852) 2151 2083 Fax: (852) 3107 1388
Email: info@cinotech.com.hk

Ref.: CEDKTD2EM00_0_0656L.24

12 September 2024

Hyder-Meinhardt Joint Venture
23/F, Two Harbour Square
180 Wai Yip Street, Kwun Tong
Kowloon, Hong Kong

By Post and Email

Attention: Mr. Edwin Ching

Dear Mr. Ching,

**Re: Agreement No. EDO 01/2019
Independent Environmental Checker for
Contract No. ED/2018/04 – Trunk Road T2 and Infrastructure Works for
Developments at the Former South Apron**

Monthly EM&A Report (August 2024) for EP-458/2013/C

Reference is made to the Environmental Team's submission of the Monthly EM&A Report for August 2024 (Version 1.0) certified by the ET Leader and provided to us via email on 12 September 2024. We are pleased to inform you that we have no adverse comments on the captioned submission. We write to verify the captioned submission in accordance with Condition 4.4 of EP-458/2013/C.

Thank you for your attention. Please do not hesitate to contact the undersigned should you have any queries.

Yours sincerely,
For and on behalf of
Ramboll Hong Kong Limited



Y H Hui
Independent Environmental Checker

c.c. CEDD
BTP
Cinotech

Attn.: Mr. Tommy Wong
Attn.: Mr. Ivan Chau
Attn.: Mr. K. S. Lee

By Fax: 2739 0076
By Email
By Fax: 3107 1388

Q:\Projects\CEDKTD2EM00\02 Proj_Mgt\02 Corr\CEDKTD2EM00_0_0656L.24.doc

TABLE OF CONTENTS

Page

EXECUTIVE SUMMARY	1
Introduction.....	1
Summary of Main Works Undertaken and Key Measures Implemented	1
Environmental Monitoring Works	2
Key Information in the Reporting Month	4
Reporting Changes.....	5
Future Key Issues.....	5
1. INTRODUCTION.....	6
Background.....	6
Purpose of the Report.....	7
Project Organizations.....	7
Construction Activities undertaken during the Reporting Month	8
Summary of EM&A Requirements	8
Status of Environmental Licensing and Permitting	9
2. AIR QUALITY.....	10
Monitoring Requirement.....	10
Monitoring Locations.....	10
Monitoring Parameters and Frequency	10
Monitoring Equipment.....	11
Monitoring Methodology.....	11
Results and Observations	13
Comparison of EM&A Result with EIA Prediction	14
3. NOISE	17
Monitoring Requirements	17
Monitoring Locations.....	17
Monitoring Parameters, Frequency and Duration.....	17
Monitoring Equipment.....	18
Monitoring Methodology and QA/QC Procedure	18
Maintenance and Calibration	18
Results and Observations	19
Comparison of EM&A Result with EIA Prediction	20
4. WATER QUALITY.....	21
Monitoring Requirement.....	21
5. WASTE MANGEMENT.....	21
6. ECOLOGY	22
7. FISHERIES	22
8. CULTURAL HERITAGE.....	22
9. LANDSCAPE AND VISUAL IMPACT	23

10. LANDFILL GAS MONITORING	23
Monitoring Requirement.....	23
11. HAZARD TO LIFE	23
12. ENVIRONEMNTAL AUDIT	24
Site Audits.....	24
Implementation Status of Environmental Mitigation Measures	24
Implementation Status of Event and Action Plans	25
13. ENVIRONMENTAL NON-COMFORMANCE.....	25
Summary of Complaint, Warning, Notification of any Summons and Successful Prosecution	25
Summary of Exceedance.....	25
14. FUTURE KEY ISSUES.....	25
Monitoring Schedule.....	26
15. CONCLUSION AND RECOMMENDATION	27
Conclusions.....	27
Recommendations.....	27

LIST OF TABLES

Table I	Summary of Key Construction Work in the Reporting Month
Table II	Summary of Key Mitigation Measures Implemented in the Reporting Month
Table III	Non-compliance (exceedance) Record for the Project in the Reporting Month
Table IV	Monthly Complaints, Notifications of Summons and Successful Prosecutions in the Reporting Month
Table V	Summary of Complaints Details in Reporting Month
Table VI	Summary Table for Site Activities in the next Reporting Period
Table 1.1	Key Project Contacts
Table 1.2	Summary of Key Construction Work in the Reporting Month
Table 1.3	Summary of Environmental License and Permit
Table 2.1	Air Quality Monitoring Locations
Table 2.2	Frequency and Parameters of Air Quality Monitoring
Table 2.3	Air Quality Monitoring Equipment
Table 2.4	Major Dust Source during Air Quality Monitoring
Table 2.5	Comparison of 1-hr TSP Monitoring Data with Predictions in EIA Report
Table 2.6	Comparison of 24-hr TSP Monitoring Data with Predictions in EIA Report
Table 3.1	Noise Monitoring Stations
Table 3.2	Frequency and Parameters of Noise Monitoring
Table 3.3	Noise Monitoring Equipment
Table 3.4	Other Noise Source Identified during Noise Monitoring
Table 3.5	Baseline Noise Level and Noise Limit Level for Monitoring Stations
Table 3.6	Maximum Predicted Mitigated Construction Noise Levels in EIA Report
Table 10.1	Landfill Gas Monitoring Equipment (not used)
Table 12.1	Observations and Recommendations of Site Audit
Table 14.1	Site Activities and the Key Environmental Issues in the next Reporting Period

LIST OF FIGURES

- Figure 1 Site Layout Plan
- Figure 1.2 Organizational Structure for Environmental Management
- Figure 2 Locations of Air Quality and Construction Noise Monitoring Stations

LIST OF APPENDICES

- Appendix A Action and Limit Levels
- Appendix B Copies of Calibration Certificates
- Appendix C Weather Information
- Appendix D Environmental Monitoring Schedules
- Appendix E 1-hour TSP Monitoring Results and Graphical Presentations
- Appendix F 24-hour TSP Monitoring Results and Graphical Presentations
- Appendix G Noise Monitoring Results and Graphical Presentations
- Appendix H Waste Generation in the Reporting Month
- Appendix I Site Audit Summary
- Appendix J Environmental Mitigation Implementation Schedule (EMIS)
- Appendix K Record of Landfill Gas Monitoring by Contractor (not used)
- Appendix L Event and Action Plans
- Appendix M Summaries of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution
- Appendix N Summary of Exceedance
- Appendix O Tentative Construction Programme

EXECUTIVE SUMMARY**Introduction**

1. This is the 52nd Environmental Monitoring and Audit (EM&A) Report prepared by the Environmental Team (ET), Cinotech Consultants Ltd., for Contract No. ED/2018/04 “Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron”, and Contract No. ED/2020/03 “Trunk Road T2 - Traffic Control And Surveillance System (TCSS) and Associated Works”. This report summarized the monitoring results and audits findings of the EM&A programme under the issued Environmental Permit (EP) No. EP-458/2013/C and in accordance with the EM&A Manual (AEIAR-173/2013) during the reporting month of August 2024.

Summary of Main Works Undertaken and Key Measures Implemented

2. The main works undertaken during the reporting period are as follows:

Table I Summary of Key Construction Work in the Reporting Month

Contract No.	Project Title	Site Activities
ED/2018/04	Trunk Road T2 and Infrastructure Works for Developments at South Apron	<ul style="list-style-type: none"> • East Ventilation Building RC Structure • East Ventilation Building ABWF • East Bound – Additional Cavern Excavation • East Bound – Type A1 OHVD • East Bound – Type C Crown • West Bound – Pre-tunnel invert excavation
ED/2020/03	Trunk Road T2 - Traffic Control And Surveillance System (TCSS) and Associated Works ⁽¹⁾	N/A

Notes:

(1): No major construction work was undertaken during reporting month.

N/A: Not applicable

3. Implementation of the key mitigation measures during the reporting period are as follows:

Table II Summary of Key Mitigation Measures Implemented in the Reporting Month

Contract No. and Project Title	Key Mitigation Measures Implemented
ED/2018/04 - Trunk Road T2 and Infrastructure Works for Developments at South Apron	<p><i>Construction Noise</i></p> <ul style="list-style-type: none"> • Construction activities were scheduled to minimize noise nuisance to the nearby sensitive receiver. • Use of Quality Powered Mechanical Equipment (QPME) on site. • Erected the noise barrier on site.

	<p><i>Air Quality</i></p> <ul style="list-style-type: none"> Regularly watering on site to avoid dust generation. <p><i>Landscape and Visual</i></p> <ul style="list-style-type: none"> Tree protection zones were fenced off to protect the existing trees on site.
ED/2020/03 - Trunk Road T2 - Traffic Control And Surveillance System (TCSS) and Associated Works (1)	N/A

Notes:

(1): No major construction work was undertaken during reporting month.

N/A: Not applicable

Environmental Monitoring Works

- Environmental monitoring for the Project was performed in accordance with the EM&A Manual and the monitoring results were checked and reviewed. Site Inspections/Audits were conducted once per week. The implementation of the environmental mitigation measures, Event Action Plans and environmental complaint handling procedures were also checked.
- Summary of the non-compliance (exceedance) in the reporting month for the Project is tabulated in **Table I**.

Table III Non-compliance (exceedance) Record for the Project in the Reporting Month

Environmental Monitoring	No. of Non-compliance (Exceedance)		No. of Non-compliance (Exceedance) due to Construction Activities of this Project		Action Taken
	Action Level	Limit Level	Action Level	Limit Level	
Air Quality	0	0	0	0	N/A
Noise	0	0	0	0	N/A
Marine Water Quality	N/A	N/A	N/A	N/A	N/A
Groundwater Level Monitoring (Piezometer Monitoring)	N/A	N/A	N/A	N/A	N/A
Ecological	N/A	N/A	N/A	N/A	N/A
Cultural Heritage	N/A	N/A	N/A	N/A	N/A
Landfill Gas	N/A ⁽¹⁾	N/A	N/A ⁽¹⁾	N/A	N/A

Note: (1): No Action Level for Landfill Gas Monitoring.

Air Quality Monitoring

6. No Action/Limit Level exceedance for 1-hour TSP monitoring was recorded.
7. No Action Level exceedance and no Limit Level exceedance was recorded for 24-hour TSP monitoring in the reporting month.

Construction Noise Monitoring

8. No Action Level exceedance was recorded due to documented complaint in the reporting month. The Summary of Documented Complaints in the Reporting Month is tabulated in **Table IV**.
9. No Limit Level exceedance for day time construction noise monitoring were recorded in the reporting month. Detail shall refer to **Appendix N**.

Water Quality Monitoring

10. Groundwater quality monitoring had been suspended since October 2019 upon the agreement by EPD. Further details should be founded at **Section 4.1**.
11. No marine water quality monitoring is required as no marine works will be conducted at the Cha Kwo Ling and Lam Tin areas for this project.
12. As the construction activity is approximately 120m away from the piezometer gate, no piezometer monitoring is required.

Waste Management

13. Wastes generated from this Project include inert construction and demolition (C&D) materials, and non-inert C&D materials. Details of waste management data is presented in **Appendix H**.

Ecological Monitoring

14. No coral monitoring is required as no marine works will be conducted at the Cha Kwo Ling and Lam Tin areas for this project.

Fisheries Impact Monitoring

15. No specific fisheries monitoring programme is required during the construction phase.

Monitoring on Cultural Heritage

16. As the construction works of Cha Kwo Ling Tunnel from the end of Trunk Road T2 to the TKOLTT at the Eastern Ventilation Building are located more than 100m away from the Cha Kwo Ling Tin Hau temple, no monitoring on cultural heritage is required.

Landscape and Visual Monitoring and Audit

17. The implementation of landscape and visual mitigation measures was checked by a registered landscape architect. Recommended follow-up actions have been discharged by the Contractor. Details of the audit findings and implementation status are presented in **Section 12**.

Landfill Gas Monitoring

18. Monitoring of landfill gases was commenced in December 2016. Since no excavation activity for this Project was carried out within the Sai Tso Wan Landfill Consultation Zone in the reporting month, no landfill gas monitoring is required

Hazard to Life Monitoring

19. No environmental monitoring and audit are required as no hazard assessment was conducted.

Environmental Site Inspection

20. Joint weekly site inspections were conducted by representatives of the Contractor, Engineer and Environmental Team. Details of the audit findings and implementation status are presented in **Section 12**.

Key Information in the Reporting Month

21. Summary of key information in the reporting month is tabulated in **Table II**.

Table IV Summary of Complaints, Notifications of Summons and Successful Prosecutions in the Reporting Month

Event	Event Details		Action Taken	Status
	Number	Nature		
Complaints Received	0	--	N/A	N/A
Notifications of any summons & prosecutions received	0	--	N/A	N/A

22. Summary of complaints received in the reporting month is tabulated in **Table III**.

Table V Summary of Complaints Details in Reporting Month

Complaint Type	Investigation Findings	Follow-up Action / Mitigation Measure
--	--	--

Reporting Changes

23. No reporting change is recorded in the reporting months.

Future Key Issues

24. The key works or activities will be anticipated in the next reporting period are as follows:

Table VI Summary Table for Site Activities in the next Reporting Period

Contract No. and Project Title	Site Activities (September 2024)	Key Environmental Issues
ED/2018/04 - Trunk Road T2 and Infrastructure Works for Developments at South Apron	<ul style="list-style-type: none"> • East Ventilation Building RC Structure • East Ventilation Building ABWF • East Bound – Additional Cavern Excavation • East Bound – Type C Crown • East Bound – Type A1 OHVD • West Bound – Pre-tunnel invert excavation 	(A) / (B) / (C) / (D)
ED/2020/03 - Trunk Road T2 - Traffic Control And Surveillance System (TCSS) and Associated Works ⁽¹⁾	N/A	

Notes:

(1): No major construction work was undertaken during reporting month.

N/A: Not applicable

(A) Dust generation from haul road, stockpile of dusty materials, exposed site area, excavation works and rock breaking activities;

(B) Noisy construction activity such as rock-breaking activities and piling works

(C) Runoff from exposed slope or site area; and

(D) Wastewater and runoff discharge from site.

1. INTRODUCTION

Background

- 1.1 In 2009, Civil Engineering and Development Department (CEDD) commissioned a Kai Tak Development (KTD) – Trunk Road T2 and Infrastructure at South Apron Investigation. The assignment covers the provision of the Trunk Road T2 and its connections with the Central Kowloon Route (CKR) at the north apron area and the Tseung Kwan O – Lam Tin Tunnel (TKOLTT) to the south in the Cha Kwo Ling area.
- 1.2 The Trunk Road T2 Project is one of the designated Projects under Schedule 2 of the EIAO proposed in the KTD. CEDD submitted the Project Profile (No. PP-379/2009) on 24 March 2009 for application for an EIA study brief for the Trunk Road T2 Project under the EIAO. Accordingly, an EIA Study Brief (ESB-203/2009) for the Trunk Road T2 Project was issued on 30 April 2009. The Environmental Impact Assessment (EIA) Report for the Trunk Road T2 Project was approved under the Environmental Impact Assessment Ordinance (EIAO) on 19 September 2013. The corresponding Environmental Permit (EP) was issued on 19 September 2013 (EP no.: EP-451/2013).
- 1.3 The Contract No. ED/2018/04 is the main contract of Trunk Road T2 (“T2 Main Works”) which comprises mainly the design and construction of a dual two-lane trunk road of approximately 3.0km long with about 2.7km of the trunk road in form of tunnel; ventilation and administration buildings, environmental protection and mitigation works and etc. Moreover, the Contract No. ED/2020/03 is the other contract under Truck Road T2 Project which comprises mainly design and construction of the TCSS for this Project. The EM&A programme under the Contract ED/2018/04 and ED/2020/03 are governed by the two EPs (EP-451/2013 and EP-458/2013/C) and two EM&A Manuals (AEIAR-174/2013 and AEIAR-173/2013). The work areas of the T2 Main Works are shown in **Figure 1** and the works to be executed under these Contracts and corresponding EPs are summarized as follows:

Environmental Permit	Works Description
EP-451/2013 – Trunk Road T2	<u>ED/2018/04</u> <ul style="list-style-type: none"> ● Construction of highway and sub-sea tunnel connecting between Central Kowloon Route and Cha Kwo Ling Tunnel ● Western & Eastern Ventilation Buildings <u>ED/2020/03</u> Design and construction of TCSS for Trunk Road T2
EP-458/2013/C – Tseung Kwan O – Lam Tin Tunnel (TKOLTT) and Associated Works	<u>ED/2018/04</u> <ul style="list-style-type: none"> ● Construction of Cha Kwo Ling Tunnel from the end of Trunk Road T2 to the TKOLTT at the Eastern Ventilation Building <u>ED/2020/03</u> <ul style="list-style-type: none"> ● Design and construction of TCSS for Trunk Road T2

Monitoring Works in Lam Tin under EP-458/2013/C

- 1.4 Under Agreement No. CE 59/2015 (EP) – Tseung Kwan O – Lam Tin Tunnel (TKOLLT) and Associated Works, the baseline monitoring works in Lam Tin under the EM&A Manual (AEIAR-173/2013) were conducted by the Environmental Team (ET) for the Agreement No. CE 59/2015 (EP) at the approved monitoring locations, namely AM1, AM2, AM3, AM4, AM4 (A) CM1, CM2, CM3, CM4 and CM5. Impact monitoring within the Lam Tin area shall be conducted by the ET of Contract No. ED/2018/04 upon cessation of Agreement No. CE 59/2015 (EP). The data obtained from the impact monitoring works completed by the ET of Agreement No. CE 59/2015 (EP) will be adopted in this report.
- 1.5 Cinotech Consultants Ltd. was designated as the Environmental Team (ET) to undertake the EM&A works for “Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron” (hereinafter called the “Project”).

Purpose of the Report

- 1.6 This is the 52nd Monthly EM&A Report which summarises the impact monitoring results and audit findings for the EM&A programme during the reporting period in August 2024.

Project Organizations

- 1.7 Different Parties with different levels of involvement in the Project organization include:
- Permit Holder – Civil Engineering and Development Department (CEDD)
 - Supervisor Representative – Hyder-Meinhardt Joint Venture (HMJV)
 - Environmental Team (ET) – Cinotech Consultants Limited (Cinotech)
 - Independent Environmental Checker (IEC) – Ramboll Hong Kong Limited (Ramboll)
 - Contractor – Bouygues Travaux Publics (BTP) (For ED/2018/04) & GTECH Services (Hong Kong) Limited (For ED/2020/03)
- 1.8 The key contacts of the Project are shown in **Table 1.1**.

Table 1.1 Key Project Contacts

Party	Role	Contact Person	Phone No.
CEDD	Permit Holder	Mr. Wong Chi Wai, Tommy	3842 7111
HMJV	Supervisor Representative	Ms. Hazel Tang	2149 8524
Cinotech	Environmental Team	Mr. KS Lee (ETL)	2151 2091
		Ms. Karina Chan	2157 3880
Ramboll	Independent Environmental Checker	Mr. YH Hui	3465 2850
BTP	Contractor (ED/2018/04)	Mr. Roy Leung	6628 2685
GTECH	Contractor (ED/2020/03)	Mr. Deacon Choi	6038 3568

1.9 The Organizational Structure for Environmental Management is shown in **Figure 1.2**.

Construction Activities undertaken during the Reporting Month

1.10 The major site activities undertaken in the reporting month included:

Table 1.2 Summary of Key Construction Work in the Reporting Month

Contract No.	Project Title	Site Activities
ED/2018/04	Trunk Road T2 and Infrastructure Works for Developments at South Apron	<ul style="list-style-type: none"> • East Ventilation Building RC Structure • East Ventilation Building ABWF • East Bound – Additional Cavern Excavation • East Bound – Type A1 OHVD • East Bound – Type C Crown • West Bound – Pre-tunnel invert excavation
ED/2020/03	Trunk Road T2 – Traffic Control And Surveillance System (TCSS) and Associated Works ⁽¹⁾	N/A

Notes:

(1): No major construction work was undertaken during reporting month.

N/A: Not applicable

Summary of EM&A Requirements

1.11 The EM&A programme requires construction noise, air quality monitoring and environmental site audit, etc. The EM&A requirements for each parameter are described in the following sections, including:

- All monitoring parameters;
- Action and Limit levels for all environmental parameters;
- Event Action Plans;
- Environmental mitigation measures, as recommended in the Project EIA Report.

1.12 The advice on the implementation status of environmental protection and pollution control/mitigation measures is summarized in **Section 12** of this report.

1.13 This report presents the monitoring results, observations, locations, equipment, period, methodology and QA/QC procedures of the monitoring parameters of the required environmental monitoring works and audit works for the Project in August 2024.

Status of Environmental Licensing and Permitting

1.14 All permits/licenses obtained for the Project are summarized in **Table 1.3**.

Table 1.3 Summary of Environmental License and Permit

Permit / License No.	Valid Period		Status
	From	To	
Environmental Permit (EP)			
EP-451/2013	19 Sep 2013	N/A	Valid
EP-458/2013/C	20 Jan 2017	N/A	Valid
Notification pursuant to Air Pollution (Construction Dust) Regulation			
Ref. No.: 451120	20 Nov 2019	N/A	Valid
Billing Account for Construction Waste Disposal			
A/C No.: 7036016	09 Dec 2019	N/A	Valid
Construction Noise Permit			
CNP No. (For Portion Q): GW-RE0309-24	21 Mar 2024	31 Aug 2024	Valid until 31 Aug 2024
CNP No. (For Portion U): GW-RE0314-24	01 Apr 2024	30 Sep 2024	Valid
CNP No. (For Portion T1): GW-RE0847-24	19 Jul 2024	14 Jan 2025	Valid
CNP No. (For Portion Q): GW-RE1005-24	01 Sep 2024	31 Dec 2024	Valid
Wastewater Discharge License			
WT00036699-2020	14 Jan 2021	31 Jan 2026	Valid
Chemical Waste Producer License			
WPN: 5213-286-B2557-03	09 Mar 2020	N/A	Valid

2. AIR QUALITY

Monitoring Requirement

- 2.1 According to Section 2.2.4 of the EM&A Manual (AEIAR-173/2013), 1-hour and 24-hour Total Suspended Particulates (TSP) monitoring was conducted to monitor the air quality for this Project. For regular impact monitoring, a sampling frequency of at least once in every six days at all of the monitoring stations for 1-hour and 24-hour TSP monitoring. **Appendix A** shows the established Action/Limit Levels for the environmental monitoring works.

Monitoring Locations

- 2.2 Five designated monitoring stations were selected for air quality monitoring programme. **Table 2.1** describes the air quality monitoring locations, which are also depicted in **Figure 2**.

Table 2.1 Air Quality Monitoring Locations

Monitoring Stations	Location	Location of Measurement
AM1	Tin Hau Temple	Ground Level
AM2	Sai Tso Wan Recreation Ground	Ground Level
AM3	Yau Lai Estate Bik Lai House	Rooftop (41/F)
AM4 ⁽¹⁾	Sitting-out Area at Cha Kwo Ling Village	Ground Level
AM4(B) ^{(2) (*) (**)}	Flat 103 Cha Kwo Ling Village	Ground Level

Remarks:

(1) For 1-hour TSP monitoring;

(2) For 24-hour TSP monitoring

(*) Air quality monitoring at designated station AM4 (24-hr TSP) was rejected by the premise owners.

Therefore, baseline and impact air quality monitoring works were carried out at alternative air quality monitoring stations AM4 (A) (24-hr TSP only)

(**) AM4(A) is not available for conducting monitoring due to the demolition of administrative office.

Monitoring Parameters and Frequency

- 2.3 **Table 2.2** summarizes the monitoring parameters, monitoring period and frequencies of impact air quality monitoring. The monitoring schedule is shown in **Appendix D**.

Table 2.2 Frequency and Parameters of Air Quality Monitoring

Monitoring Stations	Parameter	Period	Frequency
AM1, AM2, AM3, AM4	1-hour TSP	0700 – 1900	3 times per 6 days
AM1, AM2, AM3, AM4(B)	24-hour TSP	24 hours	Once every 6 days

Monitoring Equipment

- 2.4 High Volume Samplers (HVS) in compliance with the specification stipulated in the EM&A Manual (AEIAR-173/2013), Section 2.3.1, were used to carry out 24-hour TSP monitoring. Direct reading dust meter were also used to measure 1-hour average TSP levels. The 1-hour sampling was determined by HVS to check the validity and accuracy of the results measured by direct reading method.
- 2.5 Wind data monitoring equipment was set at rooftop (about 41/F) of Yau Lai Estate Bik Lai House for logging wind speed and wind direction such that the wind sensors are clear of obstructions or turbulence caused by building. The wind data monitoring equipment is re-calibrated at least once every six months and the wind directions are divided into 16 sectors of 22.5 degrees each. The location is shown in **Figure 2**. This weather information for the reporting month is summarized in **Appendix C**.
- 2.6 **Table 2.3** summarizes the equipment used for air quality monitoring by the ET for Contract No. CE 59/2015 (EP). Copies of calibration certificates are attached in **Appendix B**.

Table 2.3 Air Quality Monitoring Equipment

Equipment	Model	Quantity
1-hour TSP Dust Meter	Sibata Model No. LD-3B (Serial No.: 2Y6194) Sibata Model No. LD-5R (Serial No.: 972777, 972778, 972780, 8Y2374, 8Y2373)	6
HVS Sampler	GMW model: GS2310 (Serial No.: 1287, 10379, 10599)	3
	TE 5170 (Serial No.: 1956)	1
Calibrator	TISCH Model: TE-5025A (Serial No.: 3864)	1
Wind Anemometer	Davis Weather Monitor II, Model no. 7440 (Serial No.: MC01010A44)	1

Monitoring Methodology***1-hour TSP Monitoring***Measuring Procedures

- 2.7 The measuring procedures of the 1-hour dust meter are in accordance with the Manufacturer's Instruction Manual as follows:

(Sibata Model No.: LD-5R)

- The 1-hour dust meter is placed at least 1.3 meters above ground.
- Set POWER to "ON" and make sure that the battery level was not flash or in low level.
- Allow the instrument to stand for about 3 minutes and then the cap of the air sampling inlet has been released.
- Push the knob at MEASURE position.

- Set time/mode setting to [BG] by pushing the time setting switch. Then, start the background measurement by pushing the start/stop switch once. It will take 6 sec. to complete the background measurement.
- Push the time setting switch to change the time setting display to [MANUAL] at the bottom left of the liquid crystal display. Finally, push the start/stop switch to stop the measuring after 1 hour sampling.
- Information such as sampling date, time, count value and site condition were recorded during the monitoring period.

Maintenance/Calibration

2.8 The following maintenance/calibration is required for the 1-hour dust meter:

- Check and calibrate the meter by HVS to check the validity and accuracy of the results measured by direct reading method at 2-month intervals throughout all stages of the air quality monitoring.

24-hour TSP Monitoring

Instrumentation

2.9 High volume samplers (HVS) (TISCH Model: TE-5170 and GMW Model: GS2310) completed with appropriate sampling inlets were employed for 24-hour TSP monitoring. The sampler was composed of a motor, a filter holder, a flow controller and a sampling inlet and its performance specification complied with that required by USEPA Standard Title 40, Code of Federation Regulations Chapter 1 (Part 50).

2.10 The positioning of the HVS samplers are as follows:

- A horizontal platform with appropriate support to secure the samplers against gusty wind shall be provided;
- No two samplers shall be placed less than 2 meters apart;
- The distance between the sampler and an obstacle, such as buildings, must be at least twice the height that the obstacle protrudes above the sampler;
- A minimum of 2 metres of separation from walls, parapets and penthouses is required for rooftop samplers;
- A minimum of 2 metres of separation from any supporting structure, measured horizontally is required;
- No furnace or incinerator flue is nearby;
- Airflow around the sampler is unrestricted;
- The sampler is more than 20 metres from the dripline;
- Any wire fence and gate, to protect the sampler, shall not cause any obstruction during monitoring;
- Permission must be obtained to set up the samplers and to obtain access to the monitoring stations; and
- A secured supply of electricity is needed to operate the samplers.

Operating/analytical procedures for the operation of HVS

2.11 Operating/analytical procedures for the air quality monitoring are highlighted as follows:

- Prior to the commencement of the dust sampling, the flow rate of the high-volume sampler was properly set (between 0.6 m³/min. and 1.7 m³/min.) in accordance with the EM&A manual (AEIAR-173/2013). The flow rate shall be indicated on the flow rate chart.
- For TSP sampling, fiberglass filters with a collection efficiency of > 99% for particles of 0.3µm diameter were used.
- The power supply was checked to ensure the sampler worked properly. On sampling, the sampler was operated for 5 minutes to establish thermal equilibrium before placing any filter media at the designated air monitoring station.
- The filter holding frame was then removed by loosening the four nuts and a weighted and conditioned filter was carefully centered with the stamped number upwards, on a supporting screen.
- The filter was aligned on the screen so that the gasket formed an airtight seal on the outer edges of the filter. Then the filter holding frame was tightened to the filter holder with swing bolts. The applied pressure should be sufficient to avoid air leakage at the edges.
- The shelter lid was closed and secured with the aluminium strip.
- The timer was then programmed. Information was recorded on the record sheet, which included the starting time, the weather condition and the filter number (the initial weight of the filter paper can be found out by using the filter number).
- After sampling, the filter was removed and sent to the HOKLAS laboratory (ALS Technichem (HK) Pty Ltd.) for weighing. The elapsed time was also recorded.
- Before weighing, all filters were equilibrated in a conditioning environment for 24 hours. The conditioning environment temperature should be between 25°C and 30°C and not vary by more than ±3°C; the relative humidity (RH) should be < 50% and not vary by more than ±5%. A convenient working RH is 40%.

Maintenance/Calibration

2.12 The following maintenance/calibration is required for the HVS:

- The high-volume motors and their accessories were properly maintained. Appropriate maintenance such as routine motor brushes replacement and electrical wiring checking were made to ensure that the equipment and necessary power supply are in good working condition.

High volume samplers were calibrated at bi-monthly intervals using TE-5025A Calibration Kit throughout all stages of the air quality monitoring.

Results and Observations

2.13 The impact monitoring works for air quality monitoring locations AM1, AM2, AM3 and AM4 are completed by the ET of Agreement No. CE 59/2015 (EP), and the data will be adopted in this report. As the proposal for relocation approved, the monitoring at AM4(A) will be conducted at AM4(B). For the time being, as the station CKL2 for the 24 hr TSP monitoring, carried out under EM&A works for Trunk Road T2 Project (EP- 451/2013), is located in close proximity to AM4(B); the results from CKL2 are adopted as reference for the 24 TSP monitoring at AM4(B), which has similar environment when compared with that for CKL2. The location of monitoring station CKL2 is shown in **Figure 2**.

- 2.14 The impact air quality monitoring was conducted at all five monitoring stations as scheduled. The monitoring schedule is shown in **Appendix D**.
- 2.15 No Action Level exceedance was recorded for 24-hour TSP monitoring in the reporting month and No Limit Level exceedance was recorded for 24-hour TSP monitoring in the reporting month.
- 2.16 No Action/Limit Level exceedance was recorded for 1-hour TSP monitoring in the reporting month.
- 2.17 The monitoring data and graphical presentations of 1-hour and 24-hour TSP monitoring results are shown in **Appendix E** and **Appendix F** respectively.
- 2.18 According to field observations by ET for Agreement No. CE 59/2015 (EP) in the reporting period, the major dust source identified at the designated air quality monitoring stations are as follows:

Table 2.4 Major Dust Source during Air Quality Monitoring

Monitoring Stations	Major Dust Source
AM1 – Tin Hau Temple	Road Traffic at Cha Kwo Ling Road, non-project related influence and the construction activity from other construction site (i.e underground utility work in TKOLTT project)
AM2 – Sai Tso Wan Recreation Ground	Road Traffic along Sin Fat Road
AM3 – Yau Lai Estate Bik Lai House	Road Traffic near Eastern Cross Harbour Tunnel Toll Plaza, non-project related influence and the construction activity from other construction site (i.e road paving work in TKOLTT project)
AM4 - Sitting-out Area at Cha Kwo Ling Village	Road Traffic at Cha Kwo Ling Road
AM4(B) (**) - Flat 103 Cha Kwo Ling Village	Road Traffic at Cha Kwo Ling Road (*)

(*): Field observation observed at CKL2 during monitoring is presented. Detail refers to S2.13.

(**) AM4(A) is not available for conducting monitoring due to the demolition of administrative office.

Comparison of EM&A Result with EIA Prediction

- 2.19 The air monitoring data was compared with the predictions (with the assessment height of 1.5 mAG) in Table 3.17 of EIA Report, AEIAR-173/2013 (as approved in 2013) as summarised in **Table 2.5** and **Table 2.6**.

Table 2.5 Comparison of 1-hr TSP Monitoring Data with Predictions in EIA Report

Monitoring Stations	ASR ID	Predicted Maximum 1-hr TSP Concentration in EIA Report (AEIAR-173/2013), $\mu\text{g}/\text{m}^3$	Maximum 1-hr TSP Concentration in the Reporting Month (August 2024), $\mu\text{g}/\text{m}^3$
AM1 – Tin Hau Temple	CL1	707	153.6
AM2 – Sai Tso Wan Recreation Ground	CL6	266	86.4
AM3 – Yau Lai Estate Bik Lai House	CL9	507	84.6
AM4 - Sitting-out Area at Cha Kwo Ling Village	CL16	430	99.0

Table 2.6 Comparison of 24-hr TSP Monitoring Data with Predictions in EIA Report

Monitoring Stations	ASR ID	Predicted Maximum 24-hr TSP Concentration in EIA Report (AEIAR-173/2013), $\mu\text{g}/\text{m}^3$	Maximum 24-hr TSP Concentration in the Reporting Month (August 2024), $\mu\text{g}/\text{m}^3$
AM1 – Tin Hau Temple	CL1	199	42.8
AM2 – Sai Tso Wan Recreation Ground	CL6	109	33.3
AM3 – Yau Lai Estate Bik Lai House	CL9	123	20.5
AM4(B) – Flat 103 Cha Kwo Ling Village (*)	N/A ⁽¹⁾	N/A ⁽¹⁾	148.4 ^(**)

Remarks:

(1) No 24-hr TSP concentration was predicted in EIA Report (AEIAR-173/2013)

(*) Air quality monitoring at designated station AM4 (24-hr TSP) was rejected by the premise owners. Therefore, baseline and impact air quality monitoring works were carried out at alternative air quality monitoring stations AM4 (B) (24-hr TSP only)

(**): Monitoring results at CKL2 is presented. Detail refers to S2.13

2.20 In the reporting month, the 1-hour TSP concentrations at AM1, AM2, AM3 and AM4 were lower than the prediction in the EIA Report, AEIAR-173/2013 (as approved in 2013). No Action/Limit level exceedance was recorded in the reporting period.

- 2.21 In the reporting month, the 24-hour TSP concentrations at AM1, AM2 and AM3 were lower than the prediction in the EIA Report, AEIAR-173/2013 (as approved in 2013). No Action Level exceedance was recorded for 24-hour TSP monitoring in the reporting month and no Limit Level exceedance was recorded for 24-hour TSP monitoring in the reporting month.

3. NOISE

Monitoring Requirements

- 3.1 According to Section 3.2.1 of the EM&A Manual (AEIAR-173/2013), construction noise monitoring was conducted to monitor the construction noise arising from the construction activities. The regular monitoring frequency for each monitoring station shall be on a weekly basis and conduct one set of measurements between 0700 and 1900 hours on normal weekdays. **Appendix A** shows the established Action and Limit Levels for the environmental monitoring works.

Monitoring Locations

- 3.2 Noise monitoring was conducted at five designated monitoring stations, namely CM1, CM2, CM3, CM4 and CM5 in the reporting period. **Table 3.1** and **Figure 2** show the locations of these stations.

Table 3.1 Noise Monitoring Stations

Monitoring Stations	Location	Location of Measurement
CM1	Nga Lai House, Yau Lai Estate Phase 1, Yau Tong	Rooftop (41/F)
CM2	Bik Lai House, Yau Lai Estate Phase 1, Yau Tong	Rooftop (41/F)
CM3	Block S, Yau Lai Estate Phase 5, Yau Tong	Rooftop (40/F)
CM4	Tin Hau Temple, Cha Kwo Ling	Ground Level
CM5	CCC Kei Faat Primary School, Yau Tong	Rooftop (6/F)

Monitoring Parameters, Frequency and Duration

- 3.3 **Table 3.2** summarizes the monitoring parameters, frequency and total duration of monitoring. The noise monitoring schedule is shown in **Appendix D**.

Table 3.2 Frequency and Parameters of Noise Monitoring

Monitoring Stations	Time Period	Duration	Frequency	Parameter	Measurement
CM1	0700-1900 hrs on normal weekdays	30 minutes	Once per week	L ₁₀ (30 min.) dB(A)	Façade Measurement
CM2					Façade Measurement
CM3				L ₉₀ (30 min.) dB(A)	Façade Measurement
CM4				L _{eq} (30 min.) dB(A)	Façade Measurement
CM5					Façade Measurement

Monitoring Equipment

- 3.4 Integrating Sound Level Meter was used for impact noise monitoring. The meters were Type 1 sound level meter capable of giving a continuous readout of the noise level readings including equivalent continuous sound pressure level (L_{eq}) and percentile sound pressure level (L_x) that also complied with International Electrotechnical Commission Publications 651:1979 (Type 1) and 804:1985 (Type 1) specifications. **Table 3.3** summarizes the noise monitoring equipment being used by the ET for Agreement No. CE 59/2015 (EP) within the reporting period. Copies of calibration certificates are attached in **Appendix B**.

Table 3.3 Noise Monitoring Equipment

Equipment	Model	Quantity
Integrating Sound Level Meter	BSWA 308 (Serial No.: 580287, 570188, 570183) SVAN 957 (Serial No.: 21455)	4
Calibrator	AWA6021A (Serial No.: 1023253, 1023064) Type 4231 (Serial No.: 2326353)	3

Monitoring Methodology and QA/QC Procedure

- 3.5 The monitoring procedures are as follows:
- The monitoring station was normally be at a point 1m from the exterior of the sensitive receivers building façade and be at a position 1.2m above the ground.
 - For free field measurement, the meter was positioned away from any nearby reflective surfaces. All records for free field noise levels were adjusted with a correction of +3 dB(A).
 - The battery condition was checked to ensure the correct functioning of the meter.
 - Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:
 - Frequency weighting: A
 - Time weighting: Fast
 - Time measurement: 30 minutes
 - Prior to and after each noise measurement, the meter was calibrated using a Calibrator for 94.0 dB at 1000 Hz. If the difference in the calibration level before and after measurement was more than 1.0 dB, the measurement would be considered invalid and repeat of noise measurement would be required after re-calibration or repair of the equipment.
 - The wind speed was frequently checked with the portable wind meter.
 - At the end of the monitoring period, the L_{eq} , L_{90} and L_{10} were recorded. In addition, site conditions and noise sources were recorded on a standard record sheet.
 - Noise monitoring would be cancelled in the presence of fog, rain, and wind with a steady speed exceeding 5 m/s, or wind with gusts exceeding 10 m/s. Supplementary monitoring would be provided to ensure sufficient data would be obtained.

Maintenance and Calibration

- 3.6 The microphone head of the sound level meter and calibrator were cleaned with a soft cloth at quarterly intervals.
- 3.7 The sound level meter and calibrator were checked and calibrated at yearly intervals.

- 3.8 Immediately prior to and following each noise measurement the accuracy of the sound level meter was checked using an acoustic calibrator generating a known sound pressure level at a known frequency. Measurements were accepted as valid only if the calibration levels from before and after the noise measurement agree to within 1.0 dB.

Results and Observations

- 3.9 The data obtained from the impact monitoring works completed by the ET of Agreement No. CE 59/2015 (EP) will be adopted in this report.
- 3.10 No Action Level exceedance was recorded due to the documented complaint in the reporting month.
- 3.11 No Limit Level exceedance was recorded for day-time construction noise monitoring in the reporting month.
- 3.12 Noise monitoring results and graphical presentations are shown in **Appendix G**.
- 3.13 According to field observations by ET for Agreement No. CE 59/2015 (EP) in the reporting period, the major noise sources identified at the noise monitoring stations are shown in **Table 3.4**.

Table 3.4 Other Noise Source Identified during Noise Monitoring

Monitoring Stations	Major Noise Source
CM1	Road Traffic near Eastern Cross Harbour Tunnel Toll Plaza, non-project related construction activities (i.e road paving work in TKOLTT project)
CM2	Road Traffic near Eastern Cross Harbour Tunnel Toll Plaza, non-project related construction activities (i.e road paving work in TKOLTT project)
CM3	Road Traffic near Eastern Cross Harbour Tunnel Toll Plaza non-project related construction activities (i.e road paving work in TKOLTT project)
CM4	Road Traffic at Cha Kwo Ling Road, non-project related construction activities (i.e underground utility work in TKOLTT project)
CM5	Road Traffic near Eastern Cross Harbour Tunnel Toll Plaza, Road Traffic at Yau Tong Road

Table 3.5 Baseline Noise Level and Noise Limit Level for Monitoring Stations

Monitoring Stations	Baseline Noise Level, dB (A) (at 0700 – 1900 hrs on normal weekdays)	Noise Limit Level, dB (A) (at 0700 – 1900 hrs on normal weekdays)
CM1	65.5	75
CM2	63.6	
CM3	65.6	
CM4	62.0	
CM5	68.2	70*

(*) Noise Limit Level is 65 dB(A) during school examination periods.

Comparison of EM&A Result with EIA Prediction

3.14 The noise monitoring data was compared with the predictions in Table 4.15 of EIA Report (AEIAR-173/2013) as summarised in **Table 3.6**.

Table 3.6 Maximum Predicted Mitigated Construction Noise Levels in EIA Report

Monitoring Stations	NSR ID	Maximum Predicted Mitigated Construction Noise Levels in EIA Report (AEIAR- 173/2013), dB(A)	Maximum Construction Noise Levels in the Reporting Month (August 2024), Leq (30min) dB(A)
CM1 – Nga Lai House, Yau Lai Estate Phase 1, Yau Tong	N1102	73	68
CM2 – Bik Lai House, Yau Lai Estate Phase 1, Yau Tong	N1204	75	70
CM3 – Block S, Yau Lai Estate Phase 5, Yau Tong	N2105	75	65
CM4 – Tin Hau Temple, Cha Kwo Ling	N3101a	73	60
CM5 – CCC Kei Faat Primary School, Yau Tong	N4101	71	67

3.15 The results at CM1, CM2, CM3, CM4 and CM5 were lower than the maximum predicted mitigated construction noise level in EIA Report, AEIAR-173/2013 (as approved in 2013). No Limit level exceedance was recorded in the reporting period.

4. WATER QUALITY

Monitoring Requirement

Groundwater Quality

- 4.1 The existing groundwater quality monitoring programme has been suspended as the monitoring results had been deemed non-representative of the impact from the project justified by two major factors: (1) influence on the monitoring results from non-project related factors, such as anthropogenic activities and natural phenomenon; and (2) large separation between the monitoring stations and works area. In addition, as no alternative locations for the groundwater quality monitoring were available, the groundwater quality monitoring has been suspended since October 2019 upon the agreement by EPD.

Marine Water Quality

- 4.2 According to Section 4.4.3 of EM&A Manual (AEIAR-173/2013), marine water quality impact monitoring stations is carried out during marine construction for TKOLTT reclamation. Since the construction of Cha Kwo Ling Tunnel from the end of Trunk Road T2 to the TKOLTT at the Eastern Ventilation Building does not involve reclamation, the marine water quality monitoring programme stated in Section 4.4 of the EM&A Manual (AEIAR-173/2013) is therefore not applicable to Contract No. ED/2018/04.

Groundwater Level Monitoring (Piezometer Monitoring)

- 4.3 According to Section 4.1.2 of EM&A Manual (AEIAR-173/2013), daily piezometer monitoring will be carried out on a daily basis when any tunnel construction activities are carried out within +/- 50m of the piezometer gate in plan. As the construction works of Cha Kwo Ling Tunnel from the end of Trunk Road T2 to the TKOLTT at the Eastern Ventilation Building is approximately 120m away from the piezometer gate in plan, the piezometer monitoring programme stated in Section 4.2 of the EM&A Manual (AEIAR-173/2013) is therefore not applicable to Contract No. ED/2018/04.

5. WASTE MANGEMENT

- 5.1 According to Section 5.1.2 of the EM&A Manual (AEIAR-173/2013), Waste materials generated during construction activities, such as construction and demolition (C&D) materials and general refuse, are recommended to be audited at regular intervals (at least quarterly) to ensure that proper storage, transportation and disposal practices are being implemented by the Contractor. To fulfil this requirement, site audits are carried out on a weekly basis. The summaries of site audits are attached in **Appendix I**.
- 5.2 With reference to relevant handling records of this Project, the quantities of different types of waste generated in the reporting month are summarised and presented in **Appendix H**.

6. ECOLOGY

Post-Translocation Coral Monitoring

- 6.1 Post-translocation monitoring survey is recommended in Section 6.2.5 of the EM&A Manual (AEIAR-173/2013), to audit the success of coral translocation. Since the construction of Cha Kwo Ling Tunnel from the end of Trunk Road T2 to the TKOLTT at the Eastern Ventilation Building does not involve any marine works in the concerned area mentioned in Section 6.1.2 of the EM&A Manual (AEIAR-173/2013), the post-translocation monitoring survey stated in Section 6.2.5 of the EM&A Manual (AEIAR-173/2013) is therefore not applicable to Contract No. ED/2018/04.

7. FISHERIES

- 7.1 According to Section 7.1.3 of EM&A Manual (AEIAR-173/2013), no specific fisheries monitoring programme is required during the construction phase.
- 7.2 The implementation of the mitigation measures stated in the Water Quality Impact Assessment (Refer to Section 5 of EIA Report (AEIAR-173/2013)) will be audited as part of the EM&A procedures during the construction period. The summaries of site audits are attached in **Appendix I**.

8. CULTURAL HERITAGE

- 8.1 According to Condition 3.7 of EP-458/2013/C and Section 8.2.1 of the EM&A Manual (AEIAR-173/2013), monitoring of vibration impacts was conducted when the construction works are less than 100m from the Built Heritage in close proximity of the worksite, namely the Cha Kwo Ling Tin Hau temple. Tilting and settlement monitoring should be applied on the Cha Kwo Ling Tin Hau Temple.
- 8.2 As the construction works of Cha Kwo Ling Tunnel from the end of Trunk Road T2 to the TKOLTT at the Eastern Ventilation Building are located more than 100m away from the Cha Kwo Ling Tin Hau temple, the vibration impact monitoring stated in Section 8.3.1 of the EM&A Manual (AEIAR-173/2013) is not applicable to Contract No. ED/2018/04.

Mitigation Measures for Cultural Heritage

- 8.3 According to Condition 3.6 of EP-458/2013/C, to prevent damage to Cha Kwo Ling Tin Hau Temple and its Fung Shui rocks (Child-given rocks) during the construction phase, a temporarily fenced-off buffer zone (Rocks buffer zone is 5 m from the edge of Rocks and 15m from the edge of Rocks alter) with allowance for public access (minimum 1 m) around the temple and the Fung Shui rocks shall be provided. The open yard in front of the temple should be kept as usual for annual Tin Hau festival.
- 8.4 As there is a large buffer distance from the current works to Cha Kwo Ling Tin Hau Temple and the Fung Shui rocks (Child-given rocks), the temporarily fenced-off rocks buffer zone and from the edge of Rocks alter is not required. The fenced-off rocks buffer zone would be implemented when there are construction activities in vicinity of the cultural heritage.

9. LANDSCAPE AND VISUAL IMPACT

- 9.1 According to Section 9.3 of the EM&A Manual (AEIAR-173/2013), landscape and visual mitigation measures during the construction phase shall be checked to ensure that they are fully realized and implemented on site.
- 9.2 Site audits were carried out on a weekly basis to monitor and audit the timely implementation of landscape and visual mitigation measures listed in “Environmental Mitigation Implementation Schedule (EMIS)” (shown in **Appendix J**).
- 9.3 The implementation of landscape and visual mitigation measures was checked by a registered landscape architect. No non-compliance of the landscape and visual impact was recorded in the reporting month. Details of the audit findings and implementation status are presented in **Appendix I**.

10. LANDFILL GAS MONITORING

Monitoring Requirement

- 10.1 In accordance with Section 10.1.1 of the EM&A Manual (AEIAR-173/2013), monitoring of landfill gas is required for construction works within the Sai Tso Wan Landfill Consultation Zone during the construction phase. Since no excavation activity for this Project was carried out within the Sai Tso Wan Landfill Consultation Zone in the reporting month, no landfill gas monitoring is required.

11. HAZARD TO LIFE

- 11.1 According to Section 11.1.1 of EM&A Manual (AEIAR-173/2013), as no overnight storage of explosive on site is required for the construction of the Project, the hazard assessment is deemed not necessary. Thus, environmental monitoring and audit is not required.

12. ENVIRONMENTAL AUDIT**Site Audits**

- 12.1 Site audits were carried out on a weekly basis to monitor the timely implementation of proper environmental management practices and mitigation measures in the Project site. The summaries of site audits are attached in **Appendix I**.
- 12.2 Site audits were conducted on 01, 08, 15, 22 & 29 August 2024 in the reporting month. Site inspection of the IEC was conducted on 15 August 2024. No non-compliance was observed during the site audit.

Implementation Status of Environmental Mitigation Measures

- 12.3 According to Environmental Permits, the approved EIA Reports (Register No.: AEIAR-174/2013 and AEIAR-173/2013), and the EM&A Manuals of the Project (AEIAR-174/2013 and AEIAR-173/2013), the mitigation measures detailed in the documents are recommended to be implemented during the construction phase. An Environmental Mitigation Implementation Schedule (EMIS) is provided in **Appendix J**.
- 12.4 The ET weekly site inspections were carried out during the reporting month and the observations and recommendations are summarized in **Table 12.1**. Refer to **Appendix I** for the site inspection summary reports in the reporting month.

Table 12.1 Observations and Recommendations of Site Audit

Parameters	Date	Observations and Recommendations	Follow-up
<i>Air Quality</i>	01 August 2024	More than 20 bags of cement should be covered by impervious material cover at EVB LG1/F.	Most of cement bags are removed by contractor.
	08 August 2024	More than 20 bags of cement should be covered by impervious cover at EVB LG1/F.	Cement bags have been removed by contractor.
	22 August 2024	More than 20 bags of cement should be covered by impervious sheeting. (EBV LG1/F).	The cement bags have been covered by impervious sheeting.
<i>Noise</i>	N/A	There was no observation in the reporting period.	N/A
<i>Water Quality</i>	N/A	There was no observation in the reporting period.	N/A
<i>Ecology</i>	N/A	There was no observation in the reporting period.	N/A
<i>Landscape and Visual</i>	N/A	There was no observation in the reporting period.	N/A
<i>Waste/Chemical Management</i>	01 August 2024	Drip tray should be provided to oil/chemical containers to prevent leakage at EVB Roof Floor.	The oil/chemical containers have been removed by contractor.
	08 August 2024	Drip tray should be provided to chemical/oil containers to prevent leakage at EVB Roof Floor.	Chemical/oil containers have been removed by contractor.

Parameters	Date	Observations and Recommendations	Follow-up
<i>Permits /Licences</i>	N/A	There was no observation in the reporting period.	N/A

Implementation Status of Event and Action Plans

12.5 The Event and Action Plans for air quality and construction noise monitoring, and the Limit Levels and Action Plan for landfill gas monitoring are presented in **Appendix L**.

Air Quality Monitoring

- No Action/Limit Level exceedance for 1-hour TSP monitoring was recorded in the reporting month.
- No Action Level exceedance for 24-hour TSP monitoring was recorded in the reporting month and no Limit Level exceedance for 24-hour TSP monitoring was recorded in the reporting month.

Construction Noise Monitoring

- No Action Level exceedance was recorded due to the documented complaint in the reporting month.
- No Limit Level exceedance for construction noise monitoring was recorded in the reporting month.

13. ENVIRONMENTAL NON-COMFORMANCE

Summary of Complaint, Warning, Notification of any Summons and Successful Prosecution

13.1 The summaries of environmental complaint, warning, summon and notification of successful prosecution for the Project is presented in **Appendix M**.

Summary of Exceedance

13.2 The summary of exceedance record in the reporting month is shown in **Appendix N**.

14. FUTURE KEY ISSUES

14.1 Tentative construction programmes for the next three months are provided in **Appendix O**.

14.2 Major site activities undertaken for the coming months are summarized as follows:

Table 14.1 Site Activities and the Key Environmental Issues in the next Reporting Period

Contract No. and Project Title	Site Activities (September 2024)	Key Environmental Issues
ED/2018/04 - Trunk Road T2 and Infrastructure Works	1) East Ventilation Building RC Structure 2) East Ventilation Building ABWF	<ul style="list-style-type: none"> • Wheel washing bay at site exits; • Temporary noise barriers for PMEs;

Contract No. and Project Title	Site Activities (September 2024)	Key Environmental Issues
for Developments at South Apron	3) East Bound – Additional Cavern Excavation 4) East Bound – Type C Crown 5) East Bound – Type A1 OHVD 6) West Bound – Pre-tunnel invert excavation	<ul style="list-style-type: none"> • Sedimentation tank for settling muddy water; and • Make sure open stockpiles are covered during rainstorm.
ED/2020/03 - Trunk Road T2 - Traffic Control And Surveillance System (TCSS) and Associated Works ⁽¹⁾	N/A	

Notes:

(1): No major construction work was undertaken during reporting month.

N/A: Not applicable

Monitoring Schedule

14.3 The tentative environmental monitoring schedule for the next month is shown in **Appendix D**.

15. CONCLUSION AND RECOMMENDATION

Conclusions

- 15.1 This is the 52nd Monthly EM&A Report which presents the EM&A works undertaken during the reporting month in accordance with the EM&A Manual (AEIAR-173/2013) and the requirement under EP.

Air Quality Monitoring

- 15.2 No Action/Limit Level exceedance was recorded for 1-hour TSP monitoring in the reporting month.
- 15.3 No Action Level exceedance for 24-hour TSP monitoring was recorded in the reporting month and no Limit Level exceedance for 24-hour TSP monitoring was recorded in the reporting month.

Construction Noise Monitoring

- 15.4 No Action Level exceedance was recorded due to documented complaint in the reporting month.
- 15.5 No Limit Level exceedance for construction noise monitoring was recorded in the reporting month.

Site Audit

- 15.6 Five (5) ET joint weekly environmental site inspections were conducted for the Contract No. ED/2018/04 in the reporting month.

Complaint, Notification of Summons and Successful Prosecution

- 15.7 No environmental complaint was received in the reporting period. No notifications of summons and successful prosecutions were received in the reporting month.

Recommendations

- 15.8 According to the environmental audit performed in the reporting month, the following recommendations were made:

ED/2018/04


Air Quality

- Cement bags with more 20 bags per stack should be covered by impervious sheeting.

Waste / Chemical Management

- Drip tray should be provided for chemical containers to prevent leakage.
- Waste collector should be covered properly and in an enclosed form.


FIGURES

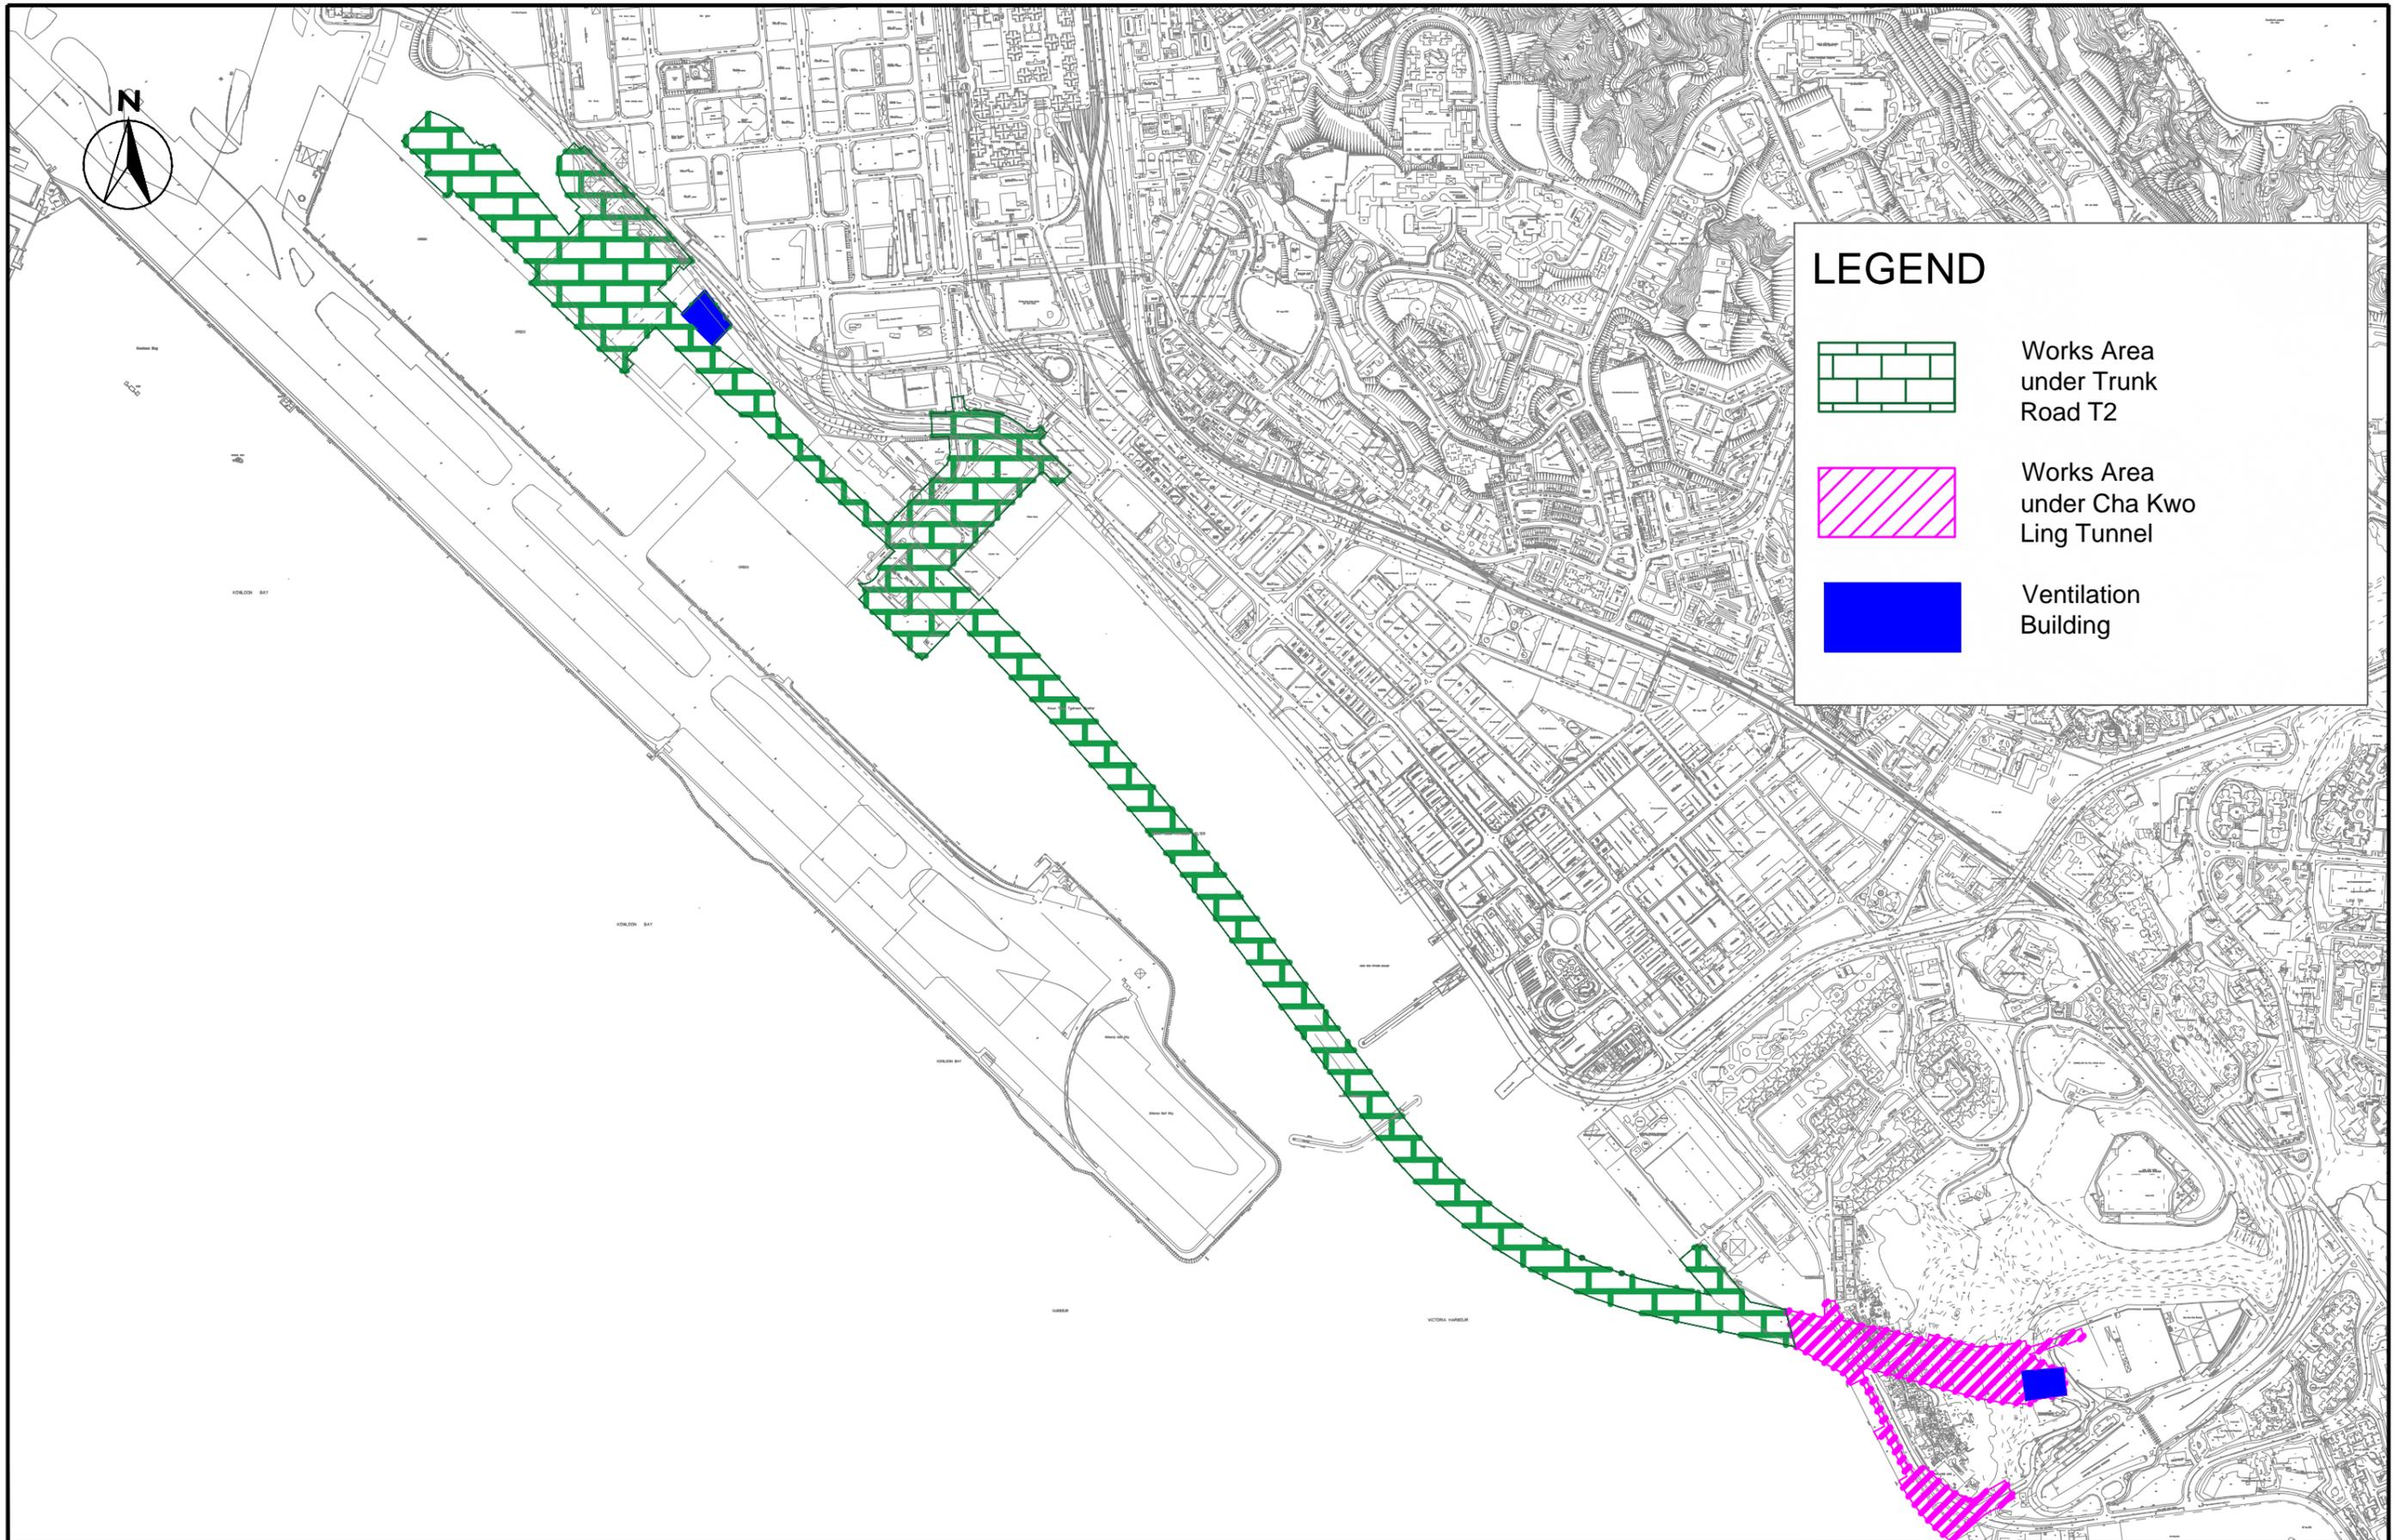

LEGEND


-  Works Area under Trunk Road T2
-  Works Area under Cha Kwo Ling Tunnel
-  Ventilation Building

SCALE	1:10000@A3	DATE	March 20
CHECK	KC	DRAWN	TL
JOB No.	MA20003	FIGURE No.	Fig 1
		REV	-


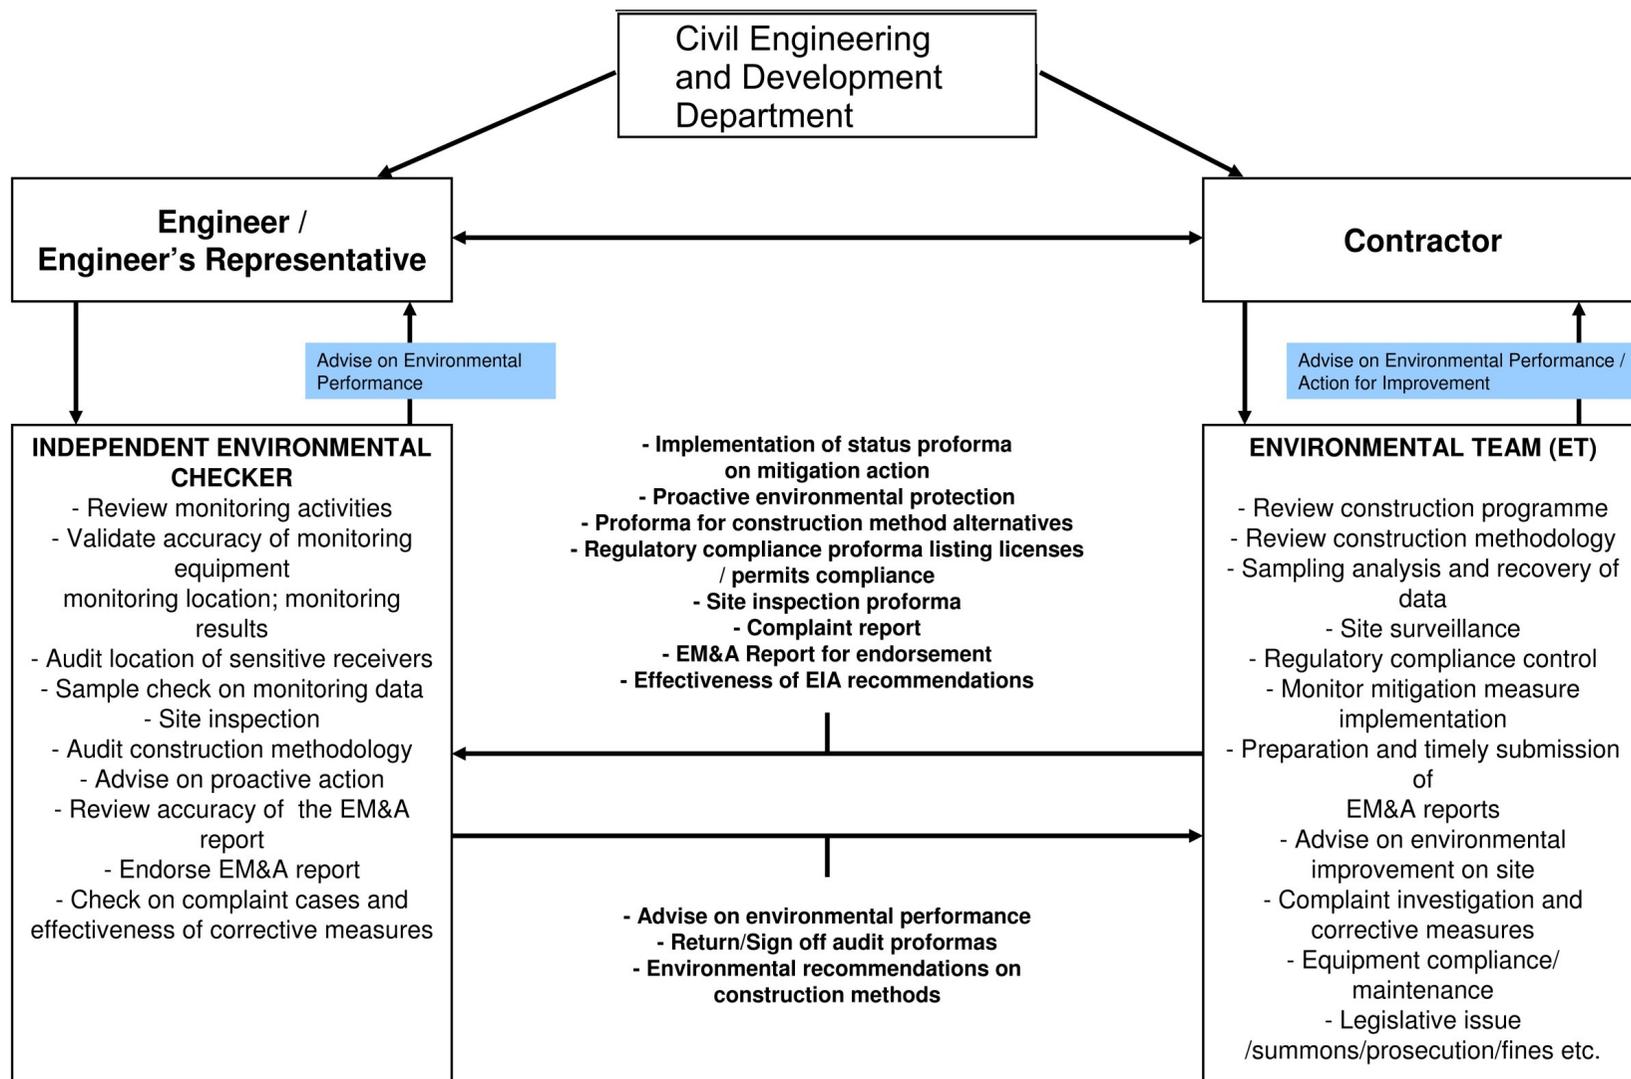


PLOT.DWG: K:\91164 Trunk Road T2\Cad Admin\A3_colour.plt
PRINTED BY: JACOB
1/17/2013 10:53:36 AM

Drawing title			Original Size	A3	Scale	N.T.S	Date	18/JAN/2013
PROJECT ORGANISATION AND LINES OF COMMUNICATION			© Copyright reserved		Drawing No.		FIGURE 1.2	
Rev.	Description	Date				Rev.		-

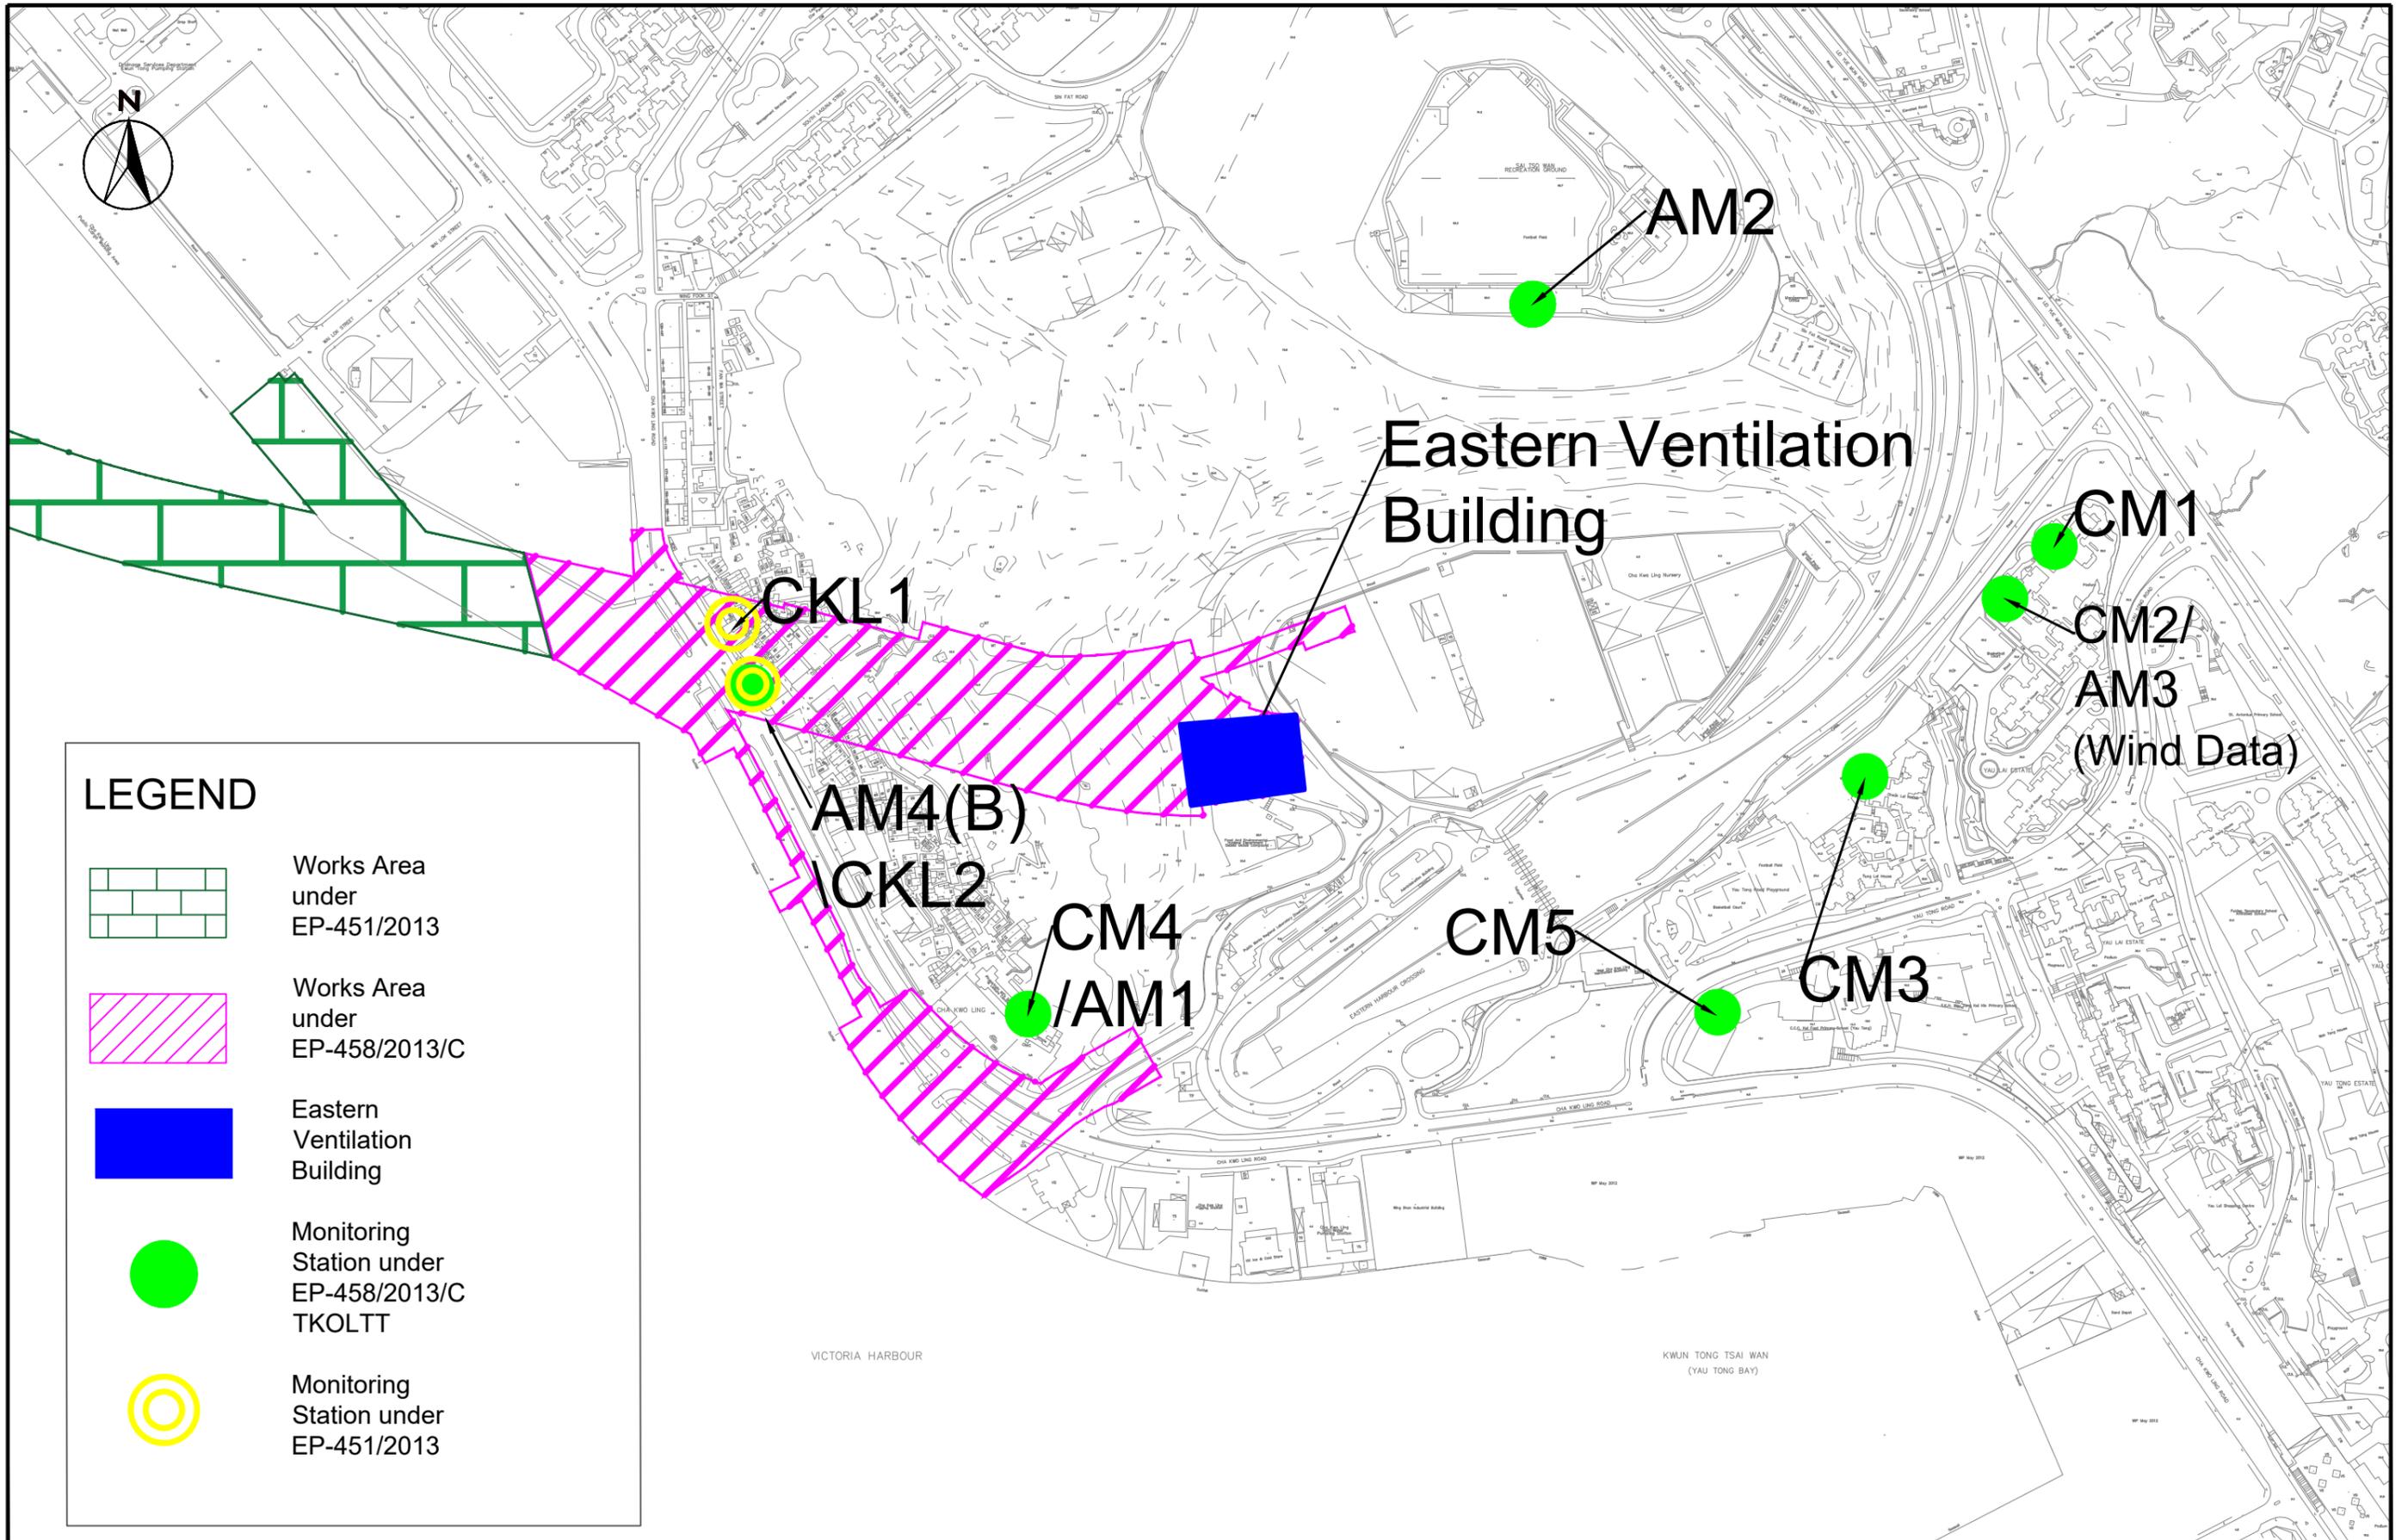

LEGEND

-  Works Area under EP-451/2013
-  Works Area under EP-458/2013/C
-  Eastern Ventilation Building
-  Monitoring Station under EP-458/2013/C TKOLTT
-  Monitoring Station under EP-451/2013

SCALE	1:4000@A3	DATE	Jul 22
CHECK	KC	DRAWN	TL
JOB No.	MA20003	FIGURE No.	Fig 2b
		REV	-

**APPENDIX A
ACTION AND LIMIT LEVELS**

APPENDIX A – Action and Limit Levels

Air Quality

1-hr TSP

Monitoring Stations	Location	Action Level, $\mu\text{g}/\text{m}^3$	Limit Level, $\mu\text{g}/\text{m}^3$
AM1	Tin Hau Temple	275	500
AM2	Sai Tso Wan Recreation Ground	273	
AM3	Yau Lai Estate Bik Lai House	271	
AM4	Sitting-out Area at Cha Kwo Ling Village	278	

24-hr TSP

Monitoring Stations	Location	Action Level, $\mu\text{g}/\text{m}^3$	Limit Level, $\mu\text{g}/\text{m}^3$
AM1	Tin Hau Temple	173	260
AM2	Sai Tso Wan Recreation Ground	192	
AM3	Yau Lai Estate Bik Lai House	167	
AM4(B)	Flat 103 Cha Kwo Ling Village	210	

Noise

Time Period	Action Level	Limit Level
0700-1900 hrs on normal weekdays	When one documented complaint is received	75 dB(A) ⁽¹⁾

¹ 70 dB(A) for schools and 65 dB(A) for schools during examination period.

² Acceptable Noise Levels for Area Sensitivity Rating of A/B/C

³ If works are to be carried out during restricted hours, the conditions stipulated in the construction noise permit issued by the Noise Control Authority have to be followed.

Landfill Gas Monitoring

Parameter	Limit Level
Oxygen	<19%
	<18%
Methane	>10% LEL (i.e. > 0.5% by volume)
	>20% LEL (i.e. > 1% by volume)
Carbon Dioxide	>0.5%
	>1.5%

**APPENDIX B
COPIES OF CALIBRATION
CERTIFICATES**

Certificate of Calibration - Wind Monitoring Station

Description: Yau Lai Estate, Bik Lai House
 Manufacturer: Davis Instruments
 Model No.: Davis7440
 Serial No.: MC01010A44
 Equipment No.: SA-03-04
 Date of Calibration: 18-Feb-2024
 Next Due Date: 18-Aug-2024

1. Performance check of Wind Speed

Wind Speed, m/s		Difference D (m/s)
Wind Speed Reading (V1)	Anemometer Value (V2)	$D = V1 - V2$
0.0	0.0	0.0
1.5	1.7	-0.2
2.5	2.4	0.1
4.0	3.8	0.2

2. Performance check of Wind Direction

Wind Direction (°)		Difference D (°)
Wind Direction Reading (W1)	Marine Compass Value (W2)	$D = W1 - W2$
0	0	0.0
90	90	0.0
180	180	0.0
270	270	0.0

Test Specification:


1. Performance Wind Speed Test - The wind meter was on-site calibrated against the anemometer
2. Performance Wind Direction Test - The wind meter was on-site calibrated against the marine compass at four direction

Calibrated by:



 Wong Shing Kwai

Approved by:



 Henry Leung

Certificate of Calibration - Wind Monitoring Station

Description: Yau Lai Estate, Bik Lai House
 Manufacturer: Davis Instruments
 Model No.: Davis7440
 Serial No.: MC01010A44
 Equipment No.: SA-03-04
 Date of Calibration: 17-Aug-2024
 Next Due Date: 17-Feb-2025

1. Performance check of Wind Speed

Wind Speed, m/s		Difference D (m/s)
Wind Speed Reading (V1)	Anemometer Value (V2)	$D = V1 - V2$
0.0	0.0	0.0
1.5	1.6	-0.1
2.5	2.3	0.2
4.0	4.0	0.0


2. Performance check of Wind Direction

Wind Direction (°)		Difference D (°)
Wind Direction Reading (W1)	Marine Compass Value (W2)	$D = W1 - W2$
0	0	0.0
90	90	0.0
180	180	0.0
270	270	0.0

Test Specification:


1. Performance Wind Speed Test - The wind meter was on-site calibrated against the anemometer
2. Performance Wind Direction Test - The wind meter was on-site calibrated against the marine compass at four direction

Calibrated by:



 Wong Shing Kwai

Approved by:



 Henry Leung

Certificate of Calibration

Calibration Certification Information			
Cal. Date: January 15, 2024	Rootsmeter S/N: 438320	Ta: 294	°K
Operator: Jim Tisch		Pa: 755.4	mm Hg
Calibration Model #: TE-5025A	Calibrator S/N: 3864		

Run	Vol. Init (m3)	Vol. Final (m3)	ΔVol. (m3)	ΔTime (min)	ΔP (mm Hg)	ΔH (in H2O)
1	1	2	1	1.4380	3.3	2.00
2	3	4	1	1.0270	6.4	4.00
3	5	6	1	0.9180	8.0	5.00
4	7	8	1	0.8750	8.9	5.50
5	9	10	1	0.7230	12.9	8.00

Data Tabulation					
Vstd (m3)	Qstd (x-axis)	$\sqrt{\Delta H \left(\frac{Pa}{Pstd} \right) \left(\frac{Tstd}{Ta} \right)}$ (y-axis)	Va	Qa (x-axis)	$\sqrt{\Delta H \left(\frac{Ta}{Pa} \right)}$ (y-axis)
1.0031	0.6975	1.4195	0.9956	0.6924	0.8823
0.9989	0.9727	2.0075	0.9915	0.9655	1.2477
0.9968	1.0858	2.2444	0.9894	1.0778	1.3950
0.9956	1.1378	2.3539	0.9882	1.1294	1.4631
0.9903	1.3697	2.8390	0.9829	1.3595	1.7645
QSTD	m=	2.11196	QA	m=	1.32248
	b=	-0.05043		b=	-0.03134
	r=	0.99998		r=	0.99998

Calculations			
Vstd=	$\Delta Vol \left(\frac{Pa - \Delta P}{Pstd} \right) \left(\frac{Tstd}{Ta} \right)$	Va=	$\Delta Vol \left(\frac{Pa - \Delta P}{Pa} \right)$
Qstd=	Vstd/ΔTime	Qa=	Va/ΔTime
For subsequent flow rate calculations:			
Qstd=	$1/m \left(\left(\sqrt{\Delta H \left(\frac{Pa}{Pstd} \right) \left(\frac{Tstd}{Ta} \right)} \right) - b \right)$	Qa=	$1/m \left(\left(\sqrt{\Delta H \left(\frac{Ta}{Pa} \right)} \right) - b \right)$

Standard Conditions	
Tstd:	298.15 °K
Pstd:	760 mm Hg
Key	
ΔH:	calibrator manometer reading (in H2O)
ΔP:	rootsmeter manometer reading (mm Hg)
Ta:	actual absolute temperature (°K)
Pa:	actual barometric pressure (mm Hg)
b:	intercept
m:	slope

RECALIBRATION
US EPA recommends annual recalibration per 1998 40 Code of Federal Regulations Part 50 to 51, Appendix B to Part 50, Reference Method for the Determination of Suspended Particulate Matter in the Atmosphere, 9.2.17, page 30

High-Volume TSP Sampler

5-POINT CALIBRATION DATA SHEET



File No. MA16034/05/0048

Project No. AM1 - Tin Hau Temple
 Date: 14-Jun-24 Next Due Date: 14-Aug-24 Operator: SK
 Equipment No.: A-01-05 Model No.: GS2310 Serial No. 10599

Ambient Condition			
Temperature, Ta (K)	302.7	Pressure, Pa (mmHg)	753.1

Orifice Transfer Standard Information					
Serial No.	3864	Slope, mc	0.05976	Intercept, bc	-0.05018
Last Calibration Date:	15-Jan-24	$mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$			
Next Calibration Date:	14-Jan-25	$Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$			

Calibration of TSP Sampler					
Calibration Point	Orifice			HVS	
	ΔH (orifice), in. of water	$[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$	Qstd (CFM) X-axis	ΔW (HVS), in. of water	$[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Y-axis
1	13.3	3.60	61.11	8.8	2.93
2	10.5	3.20	54.40	6.5	2.52
3	7.6	2.72	46.40	4.5	2.10
4	5.4	2.30	39.25	2.9	1.68
5	3.2	1.77	30.41	1.7	1.29

By Linear Regression of Y on X

Slope, $m_w =$ 0.0537 Intercept, $b_w =$ -0.3839

Correlation coefficient* = 0.9986

*If Correlation Coefficient < 0.990, check and recalibrate.

Set Point Calculation

From the TSP Field Calibration Curve, take $Qstd = 43$ CFM

From the Regression Equation, the "Y" value according to

$$m_w \times Qstd + b_w = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; $W = (m_w \times Qstd + b_w)^2 \times (760 / Pa) \times (Ta / 298) =$ 3.80

Remarks: _____

Conducted by: Wong Shing Kwai Signature: Date: 14-Jun-24

Checked by: Henry Leung Signature: Date: 14-Jun-24

High-Volume TSP Sampler

5-POINT CALIBRATION DATA SHEET



File No. MA16034/05/0049

Project No. AM1 - Tin Hau Temple
 Date: 14-Aug-24 Next Due Date: 14-Oct-24 Operator: SK
 Equipment No.: A-01-05 Model No.: GS2310 Serial No. 10599

Ambient Condition			
Temperature, Ta (K)	302.2	Pressure, Pa (mmHg)	754.8

Orifice Transfer Standard Information					
Serial No.	3864	Slope, mc	0.05976	Intercept, bc	-0.05018
Last Calibration Date:	15-Jan-24	$mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$			
Next Calibration Date:	14-Jan-25	$Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$			

Calibration of TSP Sampler					
Calibration Point	Orifice			HVS	
	ΔH (orifice), in. of water	$[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$	Qstd (CFM) X - axis	ΔW (HVS), in. of water	$[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Y-axis
1	13.2	3.60	61.01	8.7	2.92
2	10.4	3.19	54.24	6.4	2.50
3	7.5	2.71	46.19	4.4	2.08
4	5.3	2.28	38.96	2.8	1.66
5	3.1	1.74	30.00	1.5	1.21

By Linear Regression of Y on X

Slope, $m_w =$ 0.0550 Intercept, $b_w =$ -0.4631
 Correlation coefficient* = 0.9994

*If Correlation Coefficient < 0.990, check and recalibrate.

Set Point Calculation

From the TSP Field Calibration Curve, take $Qstd = 43$ CFM

From the Regression Equation, the "Y" value according to

$$m_w \times Qstd + b_w = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; $W = (m_w \times Qstd + b_w)^2 \times (760 / Pa) \times (Ta / 298) =$ 3.70

Remarks: _____

Conducted by: Wong Shing Kwai Signature: Date: 14-Aug-24

Checked by: Henry Leung Signature: Date: 14-Aug-24

High-Volume TSP Sampler

5-POINT CALIBRATION DATA SHEET



File No. MA16034/08/0048

Project No. AM2 - Sai Tso Wan Recreation Ground
 Date: 14-Jun-24 Next Due Date: 14-Aug-24 Operator: SK
 Equipment No.: A-01-08 Model No.: GS2310 Serial No. 1287

Ambient Condition			
Temperature, Ta (K)	302.7	Pressure, Pa (mmHg)	753.1

Orifice Transfer Standard Information					
Serial No.	3864	Slope, mc	0.05976	Intercept, bc	-0.05018
Last Calibration Date:	15-Jan-24	$mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$			
Next Calibration Date:	14-Jan-25	$Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$			

Calibration of TSP Sampler					
Calibration Point	Orifice			HVS	
	ΔH (orifice), in. of water	$[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$	Qstd (CFM) X-axis	ΔW (HVS), in. of water	$[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Y-axis
1	13.4	3.62	61.34	8.5	2.88
2	10.3	3.17	53.88	6.3	2.48
3	7.6	2.72	46.40	4.4	2.07
4	5.3	2.27	38.89	2.8	1.65
5	3.0	1.71	29.47	1.5	1.21

By Linear Regression of Y on X

Slope, mw = 0.0528 Intercept, bw : -0.3714
 Correlation coefficient* = 0.9995

*If Correlation Coefficient < 0.990, check and recalibrate.

Set Point Calculation

From the TSP Field Calibration Curve, take Qstd = 43 CFM

From the Regression Equation, the "Y" value according to

$$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; W = $(mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$ 3.70

Remarks: _____

Conducted by: Wong Shing Kwai Signature: Date: 14-Jun-24
 Checked by: Henry Leung Signature: Date: 14-Jun-24

High-Volume TSP Sampler

5-POINT CALIBRATION DATA SHEET



File No. MA16034/08/0049

Project No. AM2 - Sai Tso Wan Recreation Ground

Date: 14-Aug-24 Next Due Date: 14-Oct-24 Operator: SK

Equipment No.: A-01-08 Model No.: GS2310 Serial No. 1287

Ambient Condition			
Temperature, Ta (K)	302.2	Pressure, Pa (mmHg)	754.8

Orifice Transfer Standard Information					
Serial No.	3864	Slope, mc	0.05976	Intercept, bc	-0.05018
Last Calibration Date:	15-Jan-24	$mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$			
Next Calibration Date:	14-Jan-25	$Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$			

Calibration of TSP Sampler					
Calibration Point	Orifice			HVS	
	ΔH (orifice), in. of water	$[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$	Qstd (CFM) X - axis	ΔW (HVS), in. of water	$[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Y-axis
1	13.3	3.61	61.23	8.4	2.87
2	10.2	3.16	53.73	6.2	2.46
3	7.5	2.71	46.19	4.3	2.05
4	5.2	2.26	38.60	2.7	1.63
5	3.0	1.71	29.52	1.5	1.21

By Linear Regression of Y on X

Slope, mw = 0.0528 Intercept, bw : -0.3750

Correlation coefficient* = 0.9993

*If Correlation Coefficient < 0.990, check and recalibrate.

Set Point Calculation	
From the TSP Field Calibration Curve, take Qstd = 43 CFM	
From the Regression Equation, the "Y" value according to	
$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$	
Therefore, Set Point; W = (mw x Qstd + bw) ² x (760 / Pa) x (Ta / 298) =	<u>3.66</u>

Remarks: _____

Conducted by: Wong Shing Kwai Signature: Date: 14-Aug-24

Checked by: Henry Leung Signature: Date: 14-Aug-24

High-Volume TSP Sampler

5-POINT CALIBRATION DATA SHEET



File No. MA16034/03/0048

Project No. AM3 - Yau Lai Estate, Bik Lai House
 Date: 14-Jun-24 Next Due Date: 14-Aug-24 Operator: SK
 Equipment No.: A-01-03 Model No.: GS2310 Serial No. 10379

Ambient Condition			
Temperature, Ta (K)	<u>302.7</u>	Pressure, Pa (mmHg)	<u>753.1</u>

Orifice Transfer Standard Information					
Serial No.	<u>3864</u>	Slope, mc	<u>0.05976</u>	Intercept, bc	<u>-0.05018</u>
Last Calibration Date:	<u>15-Jan-24</u>	$mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$			
Next Calibration Date:	<u>14-Jan-25</u>	$Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$			

Calibration of TSP Sampler					
Calibration Point	Orifice			HVS	
	ΔH (orifice), in. of water	$[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$	Qstd (CFM) X-axis	ΔW (HVS), in. of water	$[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Y-axis
1	<u>13.0</u>	3.56	60.43	<u>8.1</u>	2.81
2	<u>10.7</u>	3.23	54.90	<u>6.3</u>	2.48
3	<u>7.7</u>	2.74	46.70	<u>4.5</u>	2.10
4	<u>5.0</u>	2.21	37.80	<u>2.9</u>	1.68
5	<u>2.9</u>	1.68	28.99	<u>1.6</u>	1.25

By Linear Regression of Y on X

Slope, mw = 0.0489 Intercept, bw : -0.1727
 Correlation coefficient* = 0.9993

*If Correlation Coefficient < 0.990, check and recalibrate.

Set Point Calculation

From the TSP Field Calibration Curve, take Qstd = 43 CFM

From the Regression Equation, the "Y" value according to

$$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; W = $(mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$ 3.81

Remarks: _____

Conducted by: Wong Shing Kwai Signature: Date: 14-Jun-24

Checked by: Henry Leung Signature: Date: 14-Jun-24

High-Volume TSP Sampler

5-POINT CALIBRATION DATA SHEET



File No. MA16034/03/0049

Project No. AM3 - Yau Lai Estate, Bik Lai House
 Date: 14-Aug-24 Next Due Date: 14-Oct-24 Operator: SK
 Equipment No.: A-01-03 Model No.: GS2310 Serial No. 10379

Ambient Condition			
Temperature, Ta (K)	<u>302.2</u>	Pressure, Pa (mmHg)	<u>754.8</u>

Orifice Transfer Standard Information					
Serial No.	<u>3864</u>	Slope, mc	<u>0.05976</u>	Intercept, bc	<u>-0.05018</u>
Last Calibration Date:	<u>15-Jan-24</u>	$mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$			
Next Calibration Date:	<u>14-Jan-25</u>	$Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$			

Calibration of TSP Sampler					
Calibration Point	Orifice			HVS	
	ΔH (orifice), in. of water	$[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$	Qstd (CFM) X - axis	ΔW (HVS), in. of water	$[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Y-axis
1	<u>12.9</u>	3.55	60.32	<u>8.0</u>	2.80
2	<u>10.6</u>	3.22	54.76	<u>6.2</u>	2.46
3	<u>7.6</u>	2.73	46.49	<u>4.4</u>	2.08
4	<u>5.0</u>	2.21	37.87	<u>2.8</u>	1.66
5	<u>2.9</u>	1.69	29.04	<u>1.6</u>	1.25

By Linear Regression of Y on X

Slope, mw = 0.0490 Intercept, bw : -0.1883
 Correlation coefficient* = 0.9992

*If Correlation Coefficient < 0.990, check and recalibrate.

Set Point Calculation

From the TSP Field Calibration Curve, take Qstd = 43 CFM

From the Regression Equation, the "Y" value according to

$$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; W = $(mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$ 3.75

Remarks: _____

Conducted by: Wong Shing Kwai Signature: Date: 14-Aug-24

Checked by: Henry Leung Signature: Date: 14-Aug-24

High-Volume TSP Sampler

5-POINT CALIBRATION DATA SHEET



File No. MA20003/55/027

Project No. CKL 2 - Flat 103 Cha Kwo Ling Village
 Date: 4-Jul-24 Next Due Date: 4-Sep-24 Operator: SK
 Equipment No.: A-01-55 Model No.: TE 5170 Serial No. 1956

Ambient Condition			
Temperature, Ta (K)	303.2	Pressure, Pa (mmHg)	758.9

Orifice Transfer Standard Information					
Serial No.	3864	Slope, mc	0.05976	Intercept, bc	-0.05018
Last Calibration Date:	15-Jan-24	$mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$			
Next Calibration Date:	14-Jan-25	$Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$			

Calibration of TSP Sampler					
Calibration Point	Orifice			HVS	
	ΔH (orifice), in. of water	$[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$	Qstd (CFM) X - axis	ΔW (HVS), in. of water	$[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Y-axis
1	13.5	3.64	61.75	9.5	3.05
2	11.3	3.33	56.57	7.5	2.71
3	9.4	3.04	51.67	5.9	2.41
4	5.5	2.32	39.72	3.1	1.74
5	3.6	1.88	32.29	2.1	1.44

By Linear Regression of Y on X

Slope, mw = 0.0551 Intercept, bw : -0.3959

Correlation coefficient* = 0.9974

*If Correlation Coefficient < 0.990, check and recalibrate.

Set Point Calculation

From the TSP Field Calibration Curve, take Qstd = 43 CFM

From the Regression Equation, the "Y" value according to

$$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; $W = (mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$ 3.97

Remarks: _____

Conducted by: Wong Shing Kwai Signature: Date: 4-Jul-24

Checked by: Henry Leung Signature: Date: 4-Jul-24

Certificate of Calibration

It is certified that the item under calibration has been calibrated by corresponding calibrated High Volume Sampler

Description:	<u>Laser Dust Monitor</u>	Date of Calibration	<u>31-Jul-24</u>
Manufacturer:	<u>Sibata Scientific Technology LTD.</u>	Validity of Calibration Record	<u>30-Sep-24</u>
Model No.:	<u>LD-3B</u>		
Serial No.:	<u>2Y6194</u>		
Equipment No.:	<u>SA-01-02</u>	Sensitivity	<u>0.001 mg/m3</u>
High Volume Sampler No.:	<u>A-01-03</u>	Before Sensitivity Adjustment	<u>578</u>
Tisch Calibration Orifice No.:	<u>3864</u>	After Sensitivity Adjustment	<u>578</u>

Calibration of 1 hr TSP			
Calibration Point	Laser Dust Monitor		HVS
	Total Count	Count / Minute X-axis	Mass concentration (µg/m ³) Y-axis
1	4000	75.0	142.0
2	3600	65.0	121.0
3	3000	55.0	101.0
Average		65.0	121.3

By Linear Regression of Y on X
 Slope , mw = 2.0500 Intercept, bw = -11.9167
 Correlation coefficient* = 0.9999


Set Correlation Factor , SCF
 SCF = [K=High Volume Sampler / Dust Meter, (µ g/m3)] 1.9

In-house method in according to the instruction manual:

The Dust Monitor was compared with a calibrated High Volume Sampler and The result was used to generate the Correlation Factor (CF) between the Dust Monitor and High Volume Sampler.

Those filter papers are weighted by HOKLAS laboratory (HPCT Limited)

Calibrated by: 
 Technical Officer (Wong Shing Kwai)

Approved by: 
 Project Manager (Henry Leung)

Certificate of Calibration

It is certified that the item under calibration has been calibrated by corresponding calibrated High Volume Sampler

Description: Digital Dust Indicator Date of Calibration 31-Jul-24
 Manufacturer: Sibata Scientific Technology LTD. Validity of Calibration Record 30-Sep-24
 Model No.: LD-5R
 Serial No.: 8Y2374
 Equipment No.: SA-01-04 Sensitivity 0.001 mg/m3
 High Volume Sampler No.: A-01-03 Before Sensitivity Adjustment 652
 Tisch Calibration Orifice No.: 3864 After Sensitivity Adjustment 652


Calibration of 1 hr TSP		
Calibration Point	Laser Dust Monitor	HVS
	Mass Concentration (µg/m ³) X-axis	Mass concentration (µg/m ³) Y-axis
1	76.0	138.0
2	66.0	121.0
3	56.0	102.0
Average	66.0	120.3
By Linear Regression of Y on X Slope , mw = <u>1.8000</u> Intercept, bw = <u>1.5333</u> Correlation coefficient* = <u>0.9995</u>		
Set Correlation Factor		
Particulate Concentration by High Volume Sampler (µg/m ³)		120.3
Particulate Concentration by Dust Meter (µg/m ³)		66.0
Measuring time, (min)		60.0
Set Correlation Factor , SCF		
SCF = [K=High Volume Sampler / Dust Meter, (µg/m ³)]		<u>1.8</u>

In-house method in according to the instruction manual:

The Dust Monitor was compared with a calibrated High Volume Sampler and The result was used to generate the Correlation Factor (CF) between the Dust Monitor and High Volume Sampler.

Those filter papers are weighted by HOKLAS laboratory (HPCT Limited)

Calibrated by: 
 Technical Officer (Wong Shing Kwai)

Approved by: 
 Project Manager (Henry Leung)

Certificate of Calibration

It is certified that the item under calibration has been calibrated by corresponding calibrated High Volume Sampler

Description: Digital Dust Indicator Date of Calibration 31-Jul-24
 Manufacturer: Sibata Scientific Technology LTD. Validity of Calibration Record 30-Sep-24
 Model No.: LD-5R
 Serial No.: 8Y2373
 Equipment No.: SA-01-05 Sensitivity 0.001 mg/m3
 High Volume Sampler No.: A-01-03 Before Sensitivity Adjustment 657
 Tisch Calibration Orifice No.: 3864 After Sensitivity Adjustment 657


Calibration of 1 hr TSP		
Calibration Point	Laser Dust Monitor	HVS
	Mass Concentration (µg/m ³) X-axis	Mass concentration (µg/m ³) Y-axis
1	75.0	136.0
2	65.0	116.0
3	56.0	100.0
Average	65.3	117.3
By Linear Regression of Y on X Slope , mw = <u>1.8967</u> Intercept, bw = <u>-6.5830</u> Correlation coefficient* = <u>0.9994</u>		
Set Correlation Factor		
Particulate Concentration by High Volume Sampler (µg/m ³)	117.3	
Particulate Concentration by Dust Meter (µg/m ³)	65.3	
Measureing time, (min)	60.0	
Set Correlation Factor , SCF		
SCF = [K=High Volume Sampler / Dust Meter, (µg/m ³)]	<u>1.8</u>	

In-house method in according to the instruction manual:

The Dust Monitor was compared with a calibrated High Volume Sampler and The result was used to generate the Correlation Factor (CF) between the Dust Monitor and High Volume Sampler.

Those filter papers are weighted by HOKLAS laboratory (HPCT Litimed)

Calibrated by: 
 Technical Officer (Wong Shing Kwai)

Approved by: 
 Project Manager (Henry Leung)

Certificate of Calibration

It is certified that the item under calibration has been calibrated by corresponding calibrated High Volume Sampler

Description: Digital Dust Indicator Date of Calibration 31-Jul-24
 Manufacturer: Sibata Scientific Technology LTD. Validity of Calibration Record 30-Sep-24
 Model No.: LD-5R
 Serial No.: 972777
 Equipment No.: SA-01-06 Sensitivity 0.001 mg/m3
 High Volume Sampler No.: A-01-03 Before Sensitivity Adjustment 645
 Tisch Calibration Orifice No.: 3864 After Sensitivity Adjustment 645

Calibration of 1 hr TSP		
Calibration Point	Laser Dust Monitor	HVS
	Mass Concentration (µg/m ³) X-axis	Mass concentration (µg/m ³) Y-axis
1	76.0	137.0
2	66.0	118.0
3	56.0	100.0
Average	66.0	118.3
By Linear Regression of Y on X Slope , mw = <u>1.8500</u> Intercept, bw = <u>-3.7667</u> Correlation coefficient* = <u>0.9999</u>		
Set Correlation Factor		
Particulate Concentration by High Volume Sampler (µg/m ³)		118.3
Particulate Concentration by Dust Meter (µg/m ³)		66.0
Measuring time, (min)		60.0
Set Correlation Factor , SCF		
SCF = [K=High Volume Sampler / Dust Meter, (µg/m ³)]		<u>1.8</u>

In-house method in according to the instruction manual:

The Dust Monitor was compared with a calibrated High Volume Sampler and The result was used to generate the Correlation Factor (CF) between the Dust Monitor and High Volume Sampler.

Those filter papers are weighted by HOKLAS laboratory (HPCT Limited)

Calibrated by: 
 Technical Officer (Wong Shing Kwai)

Approved by: 
 Project Manager (Henry Leung)

Certificate of Calibration

It is certified that the item under calibration has been calibrated by corresponding calibrated High Volume Sampler

Description: Digital Dust Indicator Date of Calibration 31-Jul-24
 Manufacturer: Sibata Scientific Technology LTD. Validity of Calibration Record 30-Sep-24
 Model No.: LD-5R
 Serial No.: 972778
 Equipment No.: SA-01-07 Sensitivity 0.001 mg/m3
 High Volume Sampler No.: A-01-03 Before Sensitivity Adjustment 735 CPM
 Tisch Calibration Orifice No.: 3864 After Sensitivity Adjustment 735 CPM


Calibration of 1 hr TSP		
Calibration Point	Laser Dust Monitor	HVS
	Mass Concentration (µg/m ³) X-axis	Mass concentration (µg/m ³) Y-axis
1	74.0	138.0
2	64.0	120.0
3	54.0	100.0
Average	64.0	119.3
By Linear Regression of Y on X Slope , mw = <u>1.9000</u> Intercept, bw = <u>-2.2667</u> Correlation coefficient* = <u>0.9995</u>		
Set Correlation Factor		
Particulate Concentration by High Volume Sampler (µg/m ³)		119.3
Particulate Concentration by Dust Meter (µg/m ³)		64.0
Measuring time, (min)		60.0
Set Correlation Factor , SCF SCF = [K=High Volume Sampler / Dust Meter, (µg/m ³)] <u>1.9</u>		

In-house method in according to the instruction manual:

The Dust Monitor was compared with a calibrated High Volume Sampler and The result was used to generate the Correlation Factor (CF) between the Dust Monitor and High Volume Sampler.

Those filter papers are weighted by HOKLAS laboratory (HPCT Litimed)

Calibrated by: 
 Technical Officer (Wong Shing Kwai)

Approved by: 
 Project Manager (Henry Leung)

Certificate of Calibration

It is certified that the item under calibration has been calibrated by corresponding calibrated High Volume Sampler

Description: Digital Dust Indicator Date of Calibration 31-Jul-24
 Manufacturer: Sibata Scientific Technology LTD. Validity of Calibration Record 30-Sep-24
 Model No.: LD-5R
 Serial No.: 972780
 Equipment No.: SA-01-09 Sensitivity 0.001 mg/m3
 High Volume Sampler No.: A-01-03 Before Sensitivity Adjustment 739 CPM
 Tisch Calibration Orifice No.: 3864 After Sensitivity Adjustment 739 CPM


Calibration of 1 hr TSP		
Calibration Point	Laser Dust Monitor	HVS
	Mass Concentration (µg/m ³) X-axis	Mass concentration (µg/m ³) Y-axis
1	72.0	138.0
2	62.0	118.0
3	52.0	100.0
Average	62.0	118.7
By Linear Regression of Y on X Slope , mw = <u>1.9000</u> Intercept, bw = <u>0.8667</u> Correlation coefficient* = <u>0.9995</u>		
Set Correlation Factor		
Particulate Concentration by High Volume Sampler (µg/m ³)		118.7
Particulate Concentration by Dust Meter (µg/m ³)		62.0
Measuring time, (min)		60.0
Set Correlation Factor , SCF		
SCF = [K=High Volume Sampler / Dust Meter, (µg/m ³)]		<u>1.9</u>

In-house method in according to the instruction manual:

The Dust Monitor was compared with a calibrated High Volume Sampler and The result was used to generate the Correlation Factor (CF) between the Dust Monitor and High Volume Sampler.

Those filter papers are weighted by HOKLAS laboratory (HPCT Limited)

Calibrated by: 
 Technical Officer (Wong Shing Kwai)

Approved by: 
 Project Manager (Henry Leung)



輝創工程有限公司

Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration

校正證書

Certificate No. : C241168

證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號 : IC24-0305) Date of Receipt / 收件日期 : 21 February 2024

Description / 儀器名稱 : Acoustical Calibrator
Manufacturer / 製造商 : Brüel & Kjær
Model No. / 型號 : 4231
Serial No. / 編號 : 2326353
Supplied By / 委託者 : Cinotech Consultants Limited
Room 1710, Technology Park, 18 On Lai Street,
Shatin, N.T. Hong Kong

TEST CONDITIONS / 測試條件

Temperature / 溫度 : (23 ± 2)°C Relative Humidity / 相對濕度 : (50 ± 25)%
Line Voltage / 電壓 : ---

TEST SPECIFICATIONS / 測試規範


Calibration check


DATE OF TEST / 測試日期 : 3 March 2024

TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.
The results do not exceed specified limits.
These limits refer to manufacturer's published tolerances as requested by the customer.
The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :
- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Hottinger Brüel & Kjær Calibration Laboratory, Denmark
- Agilent Technologies / Keysight Technologies
- Fluke Everett Service Center, USA

Tested By : 
測試 : H T Wong
Assistant Engineer

Certified By : 
核證 : K C Lee
Engineer

Date of Issue : 4 March 2024
簽發日期

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory

c/o 4/F, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司 - 校正及檢測實驗室

c/o 香港新界屯門興安里一號四樓

Tel/電話: (852) 2927 2606

Fax/傳真: (852) 2744 8986

E-mail/電郵: callab@suncreation.com

Website/網址: www.suncreation.com

Certificate of Calibration

校正證書

Certificate No. : C241168

證書編號

- The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours before the commencement of the test.
- The results presented are the mean of 3 measurements at each calibration point.
- Test equipment :

<u>Equipment ID</u>	<u>Description</u>	<u>Certificate No.</u>
CL130	Universal Counter	C233799
CL281	Multifunction Acoustic Calibrator	CDK2302738
TST150A	Measuring Amplifier	C221750

- Test procedure : MA100N.

- Results :

5.1 Sound Level Accuracy

UUT Nominal Value	Measured Value (dB)	Mfr's Limit (dB)	Uncertainty of Measured Value (dB)
94 dB, 1 kHz	93.90	± 0.2	± 0.20
114 dB, 1 kHz	114.00		

5.2 Frequency Accuracy

UUT Nominal Value (kHz)	Measured Value (kHz)	Mfr's Limit	Uncertainty of Measured Value (Hz)
1	1.000 0	1 kHz ± 0.1 %	± 0.1

Remark : The uncertainties are for a confidence probability of not less than 95 %.

Note :

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室書面批准。

High Precision Chemical Testing Ltd.

Rm 1904, Technology Park
18 On Lai Street, Shatin
NT, Hong Kong
Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>



Report No. : 00736
Application No. : HP00592

Issue Date : 28 Jun 2024

Certificate of Calibration

Applicant : Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Sample Description : Submitted equipment stated to be Sound Level Calibrator.

Equipment No.: : N-16-01

Manufacturer: : Hangzhou Aihua Instruments Co., Ltd.

Other information : Model No.	AWA6021A
Serial No.	1023253

Date Received : 27 Jun 2024

Test Period : 28 Jun 2024 to 28 Jun 2024

Test Requested : Performance checking for Sound Level Calibrator

Test Method : The Sound Level Meter and Calibrator has been calibrated in accordance with the documented procedures and using standard and instrument which are recommended by the manufacturer, or equivalent.

Test conditions : Room Temperature: 22-25 degree Celsius
Relative Humidity: 35-70%

Test Result : Refer to the test result(s) on page 2.

Remark : 1. Information of the sample description provided by the Applicant.
2. The result(s) relate only to the items tested or calibrated.

For and on behalf of
HIGH PRECISION CHEMICAL TESTING LIMITED

Lee Wai Kit
Laboratory Manager

High Precision Chemical Testing Ltd.

Rm 1904, Technology Park
18 On Lai Street, Shatin
NT, Hong Kong
Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>



Report No. : 00736

Issue Date : 28 Jun 2024

Application No. : HP00592

Certificate of Calibration

Measuring
equipment

Description	Sound Calibrator
Manufacturer	Brüel & Kjær
Model No.	TYPE 4231
Serial No.	2326353
Equipment No.	N-02-01

Description	Sound Meter
Manufacturer	BSWA Technology
Model No.	BSWA 308
Serial No.	570183
Microphone No.	570605
Equipment No.	N-12-01

Test Result :

Reference value, dB	Indication value, dB	Deviation, dB	Allowed deviation, dB
94.0	94.1	+ 0.1	± 0.3
114.0	114.1	+ 0.1	± 0.5

- Note** : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.
2. The indication value was obtained from the average of ten replicated measurement.

- End of report -

High Precision Chemical Testing Ltd.

Rm 1904, Technology Park
18 On Lai Street, Shatin
NT, Hong Kong
Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>



Report No. : 00582
Application No. : HP00451

Issue Date : 14 Feb 2024

Certificate of Calibration

Applicant : Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Sample Description : Submitted equipment stated to be Sound Level Calibrator.

Equipment No.: : N-16-02

Manufacturer: : Hangzhou Aihua Instruments Co., Ltd.

Other information	Model No.	AWA6021A
	Serial No.	1023064

Date Received : 14 Feb 2024

Test Period : 15 Feb 2024 to 15 Feb 2024

Test Requested : Performance checking for Sound Level Calibrator

Test Method : The Sound Level Meter and Calibrator has been calibrated in accordance with the documented procedures and using standard and instrument which are recommended by the manufacturer, or equivalent.

Test conditions : Room Temperature: 22-25 degree Celsius
Relative Humidity: 35-70%

Test Result : Refer to the test result(s) on page 2.

Remark : **1. Information of the sample description provided by the Applicant.**
2. The result(s) relate only to the items tested or calibrated.

For and on behalf of
HIGH PRECISION CHEMICAL TESTING LIMITED

Lee Wai Kit
Laboratory Manager

High Precision Chemical Testing Ltd.

Rm 1904, Technology Park
18 On Lai Street, Shatin
NT, Hong Kong
Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>



Report No. : 00582

Issue Date : 14 Feb 2024

Application No. : HP00451

Certificate of Calibration

Measuring equipment :

Description	Sound Calibrator
Manufacturer	Brüel & Kjær
Model No.	TYPE 4231
Serial No.	2326353
Equipment No.	N-02-01

Description	Sound Meter
Manufacturer	SVANTEK
Model No.	SVAN 977
Serial No.	92677
Microphone No.	10352
Equipment No.	N-14-01

Test Result :

Reference value, dB	Indication value, dB	Deviation, dB	Allowed deviation, dB
94.0	94.2	+ 0.2	± 0.3
114.0	114.2	+ 0.2	± 0.5

- Note** : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.
2. The indication value was obtained from the average of ten replicated measurement.

- End of report -

High Precision Chemical Testing Ltd.

Rm 1904, Technology Park
18 On Lai Street, Shatin
NT, Hong Kong
Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>



Report No. : 00419
Application No. : HP00291

Issue Date : 22 Aug 2023

Certificate of Calibration

Applicant : Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Sample Description : Submitted equipment stated to be Integrating Sound Level Meter.

Equipment No.: : N-08-07

Manufacturer: : SVANTEK

Other information :

Model No.	SVAN 957
Serial No.	21455
Microphone No.	17204

Date Received : 14 Aug 2023

Test Period : 16 Aug 2023 to 16 Aug 2023

Test Requested : Performance checking for Sound Level Meter

Test Method : The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard and instrument which are recommended by the manufacturer, or equivalent.

Test conditions : Room Temperature: 22-25 degree Celsius
Relative Humidity: 35-70%

Test Result : Refer to the test result(s) on page 2.

Remark : 1. Information of the sample description provided by the Applicant.
2. The result(s) relate only to the items tested or calibrated.

For and on behalf of
HIGH PRECISION CHEMICAL TESTING LIMITED

A handwritten signature in black ink, appearing to be 'Lee Wai Kit', written over a horizontal line.

Lee Wai Kit
Laboratory Manager

High Precision Chemical Testing Ltd.

Rm 1904, Technology Park
18 On Lai Street, Shatin
NT, Hong Kong
Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>



Report No. : 00419
Application No. : HP00291

Issue Date : 22 Aug 2023

Certificate of Calibration

Measuring equipment :	Description	Sound Calibrator
	Manufacturer	Brüel & Kjær
	Model No.	TYPE 4231
	Serial No.	2326353
	Equipment No.	N-02-01

Test Result :

Reference value, dB	Indication value, dB	Deviation, dB	Allowed deviation, dB
94.0	94.1	+ 0.1	± 1.5
114.0	114.1	+ 0.1	± 1.5

- Note** : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.
2. The indication value was obtained from the average of ten replicated measurement.

- End of report -

High Precision Chemical Testing Ltd.

Rm 1904, Technology Park
18 On Lai Street, Shatin
NT, Hong Kong
Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>



Report No. : 00647
Application No. : HP00514

Issue Date : 11 Apr 2024

Certificate of Calibration

Applicant : Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Sample Description : Submitted equipment stated to be Integrating Sound Level Meter.

Equipment No.: : N-12-01

Manufacturer: : BSWA Technology

Other information :

Model No.	BSWA 308
Serial No.	570183
Microphone No.	590073

Date Received : 09 Apr 2024

Test Period : 09 Apr 2024 to 09 Apr 2024

Test Requested : Performance checking for Sound Level Meter

Test Method : The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard and instrument which are recommended by the manufacturer, or equivalent.

Test conditions : Room Temperature: 22-25 degree Celsius
Relative Humidity: 35-70%

Test Result : Refer to the test result(s) on page 2.

Remark : 1. Information of the sample description provided by the Applicant.
2. The result(s) relate only to the items tested or calibrated.

For and on behalf of
HIGH PRECISION CHEMICAL TESTING LIMITED

A handwritten signature in black ink, appearing to read 'Lee Wai Kit', is written over a horizontal line.

Lee Wai Kit
Laboratory Manager

High Precision Chemical Testing Ltd.

Rm 1904, Technology Park
18 On Lai Street, Shatin
NT, Hong Kong
Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>



Report No. : 00647
Application No. : HP00514

Issue Date : 11 Apr 2024

Certificate of Calibration

Measuring equipment :

Description	Sound Calibrator
Manufacturer	Brüel & Kjær
Model No.	TYPE 4231
Serial No.	2326353
Equipment No.	N-02-01

Test Result :

Reference value, dB	Indication value, dB	Deviation, dB	Allowed deviation, dB
94.0	94.1	+ 0.1	± 1.5
114.0	114.2	+ 0.2	± 1.5

- Note** : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.
2. The indication value was obtained from the average of ten replicated measurement.

- End of report -

High Precision Chemical Testing Ltd.

Rm 1904, Technology Park
18 On Lai Street, Shatin
NT, Hong Kong
Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>



Report No. : 00568
Application No. : HP00436

Issue Date : 14 Feb 2024

Certificate of Calibration

Applicant : Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Sample Description : Submitted equipment stated to be Integrating Sound Level Meter.

Equipment No.: : N-12-03

Manufacturer: : BSWA Technology

Other information :

Model No.	BSWA 308
Serial No.	570188
Microphone No.	570608

Date Received : 05 Feb 2024

Test Period : 07 Feb 2024 to 07 Feb 2024

Test Requested : Performance checking for Sound Level Meter

Test Method : The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard and instrument which are recommended by the manufacturer, or equivalent.

Test conditions : Room Temperature: 22-25 degree Celsius
Relative Humidity: 35-70%

Test Result : Refer to the test result(s) on page 2.

Remark : **1. Information of the sample description provided by the Applicant.**
2. The result(s) relate only to the items tested or calibrated.

For and on behalf of
HIGH PRECISION CHEMICAL TESTING LIMITED

A handwritten signature in black ink, appearing to read 'Lee Wai Kit', is written over a horizontal line.

Lee Wai Kit
Laboratory Manager

High Precision Chemical Testing Ltd.

Rm 1904, Technology Park
18 On Lai Street, Shatin
NT, Hong Kong
Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>



Report No. : 00568
Application No. : HP00436

Issue Date : 14 Feb 2024

Certificate of Calibration

Measuring equipment :

Description	Sound Calibrator
Manufacturer	Brüel & Kjær
Model No.	TYPE 4231
Serial No.	2326353
Equipment No.	N-02-01

Test Result :

Reference value, dB	Indication value, dB	Deviation, dB	Allowed deviation, dB
94.0	94.0	± 0.0	± 1.5
114.0	113.9	- 0.1	± 1.5

- Note** : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.
2. The indication value was obtained from the average of ten replicated measurement.

- End of report -

High Precision Chemical Testing Ltd.

Rm 1904, Technology Park
18 On Lai Street, Shatin
NT, Hong Kong
Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>



Report No. : 00648
Application No. : HP00515

Issue Date : 11 Apr 2024

Certificate of Calibration

Applicant : Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Sample Description : Submitted equipment stated to be Integrating Sound Level Meter.

Equipment No.: : N-12-05

Manufacturer: : BSWA Technology

Other information :

Model No.	BSWA 308
Serial No.	580287
Microphone No.	570610

Date Received : 09 Apr 2024

Test Period : 09 Apr 2024 to 09 Apr 2024

Test Requested : Performance checking for Sound Level Meter

Test Method : The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard and instrument which are recommended by the manufacturer, or equivalent.

Test conditions : Room Temperature: 22-25 degree Celsius
Relative Humidity: 35-70%

Test Result : Refer to the test result(s) on page 2.

Remark : **1. Information of the sample description provided by the Applicant.**
2. The result(s) relate only to the items tested or calibrated.

For and on behalf of
HIGH PRECISION CHEMICAL TESTING LIMITED

A handwritten signature in black ink, appearing to read 'Lee Wai Kit', is written over a horizontal line.

Lee Wai Kit
Laboratory Manager

High Precision Chemical Testing Ltd.

Rm 1904, Technology Park
18 On Lai Street, Shatin
NT, Hong Kong
Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>



Report No. : 00648

Issue Date : 11 Apr 2024

Application No. : HP00515

Certificate of Calibration

Measuring equipment :	Description	Sound Calibrator
	Manufacturer	Brüel & Kjær
	Model No.	TYPE 4231
	Serial No.	2326353
	Equipment No.	N-02-01

Test Result :

Reference value, dB	Indication value, dB	Deviation, dB	Allowed deviation, dB
94.0	94.1	+ 0.1	± 1.5
114.0	114.1	+ 0.1	± 1.5

- Note** : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.
2. The indication value was obtained from the average of ten replicated measurement.

- End of report -

APPENDIX C
WEATHER INFORMATION

Appendix C - Weather Conditions During Impact Monitoring Period

Date	Mean Air Temperature (°C) ¹	Mean Relative Humidity (%) ²	Precipitation (mm) ³
1-Aug-24	30.2	79	2.3
2-Aug-24	29.8	81	0.4
3-Aug-24	30.4	76	0.0
4-Aug-24	30.7	76	0.0
5-Aug-24	31.8	76	0.0
6-Aug-24	30.6	78	10.3
7-Aug-24	30.7	79	0.0
8-Aug-24	30.7	77	0.0
9-Aug-24	30.4	76	0.0
10-Aug-24	30.5	79	Trace
11-Aug-24	30.3	81	0.0
12-Aug-24	29.2	85	20.9
13-Aug-24	29.7	82	5.0
14-Aug-24	29.2	82	0.1
15-Aug-24	27.7	88	8.0
16-Aug-24	27.7	84	0.4
17-Aug-24	27.3	92	116.2
18-Aug-24	28.3	87	32.5
19-Aug-24	28.0	88	19.3
20-Aug-24	27.5	89	11.4
21-Aug-24	27.1	87	3.9
22-Aug-24	28.9	83	0.0
23-Aug-24	29.3	82	0.0
24-Aug-24	30.2	77	0.0
25-Aug-24	30.1	75	0.0
26-Aug-24	30.3	75	0.0
27-Aug-24	30.6	74	0.0
28-Aug-24	30.7	75	Trace
29-Aug-24	30.5	76	Trace
30-Aug-24	30.3	82	23.3
31-Aug-24	29.6	84	7.5

(Reporting Month: August 2024)**Remarks:**

Source - Hong Kong Observatory

¹⁻³Retrieved from Manned Weather Station (Hong Kong Observatory) (22°18'07" N, 114°10'27" E)

Appendix C - Weather Conditions

August 2024			
Wind Speed and Directions			
Date	Time	Direction	Wind Speed m-s
1 Aug 2024	12:00 AM	S	0.0
1 Aug 2024	1:00 AM	SSW	0.2
1 Aug 2024	2:00 AM	S	0.2
1 Aug 2024	3:00 AM	SSW	0.1
1 Aug 2024	4:00 AM	S	0.2
1 Aug 2024	5:00 AM	W	1.0
1 Aug 2024	6:00 AM	S	0.1
1 Aug 2024	7:00 AM	SSW	0.2
1 Aug 2024	8:00 AM	WNW	1.9
1 Aug 2024	9:00 AM	W	2.3
1 Aug 2024	10:00 AM	SSW	1.2
1 Aug 2024	11:00 AM	SW	1.3
1 Aug 2024	12:00 PM	S	1.3
1 Aug 2024	1:00 PM	S	1.5
1 Aug 2024	2:00 PM	SW	1.6
1 Aug 2024	3:00 PM	SSW	1.6
1 Aug 2024	4:00 PM	SW	1.8
1 Aug 2024	5:00 PM	WSW	1.8
1 Aug 2024	6:00 PM	WSW	1.4
1 Aug 2024	7:00 PM	WNW	2.1
1 Aug 2024	8:00 PM	WSW	1.5
1 Aug 2024	9:00 PM	WSW	0.7
1 Aug 2024	10:00 PM	W	1.4
1 Aug 2024	11:00 PM	SSW	0.6
2 Aug 2024	12:00 AM	SSW	0.8
2 Aug 2024	1:00 AM	SSW	0.7
2 Aug 2024	2:00 AM	SSW	0.5
2 Aug 2024	3:00 AM	WSW	0.8
2 Aug 2024	4:00 AM	W	1.0
2 Aug 2024	5:00 AM	SW	0.6
2 Aug 2024	6:00 AM	SW	0.7
2 Aug 2024	7:00 AM	WSW	1.2
2 Aug 2024	8:00 AM	SW	1.3
2 Aug 2024	9:00 AM	SW	1.8
2 Aug 2024	10:00 AM	SW	1.9
2 Aug 2024	11:00 AM	WSW	1.9
2 Aug 2024	12:00 PM	SSW	1.5
2 Aug 2024	1:00 PM	SSE	1.3
2 Aug 2024	2:00 PM	SSE	1.3
2 Aug 2024	3:00 PM	SSE	1.6
2 Aug 2024	4:00 PM	S	1.3
2 Aug 2024	5:00 PM	SE	1.4
2 Aug 2024	6:00 PM	SE	1.3
2 Aug 2024	7:00 PM	SE	1.0
2 Aug 2024	8:00 PM	SE	1.0
2 Aug 2024	9:00 PM	S	0.9
2 Aug 2024	10:00 PM	SSE	0.9
2 Aug 2024	11:00 PM	SSE	0.5
3 Aug 2024	12:00 AM	S	0.4
3 Aug 2024	1:00 AM	SSE	0.6
3 Aug 2024	2:00 AM	S	0.7
3 Aug 2024	3:00 AM	S	0.7
3 Aug 2024	4:00 AM	S	0.5
3 Aug 2024	5:00 AM	S	0.4
3 Aug 2024	6:00 AM	S	0.3
3 Aug 2024	7:00 AM	SSE	0.7
3 Aug 2024	8:00 AM	S	0.6

Appendix C - Weather Conditions

August 2024			
Wind Speed and Directions			
Date	Time	Direction	Wind Speed m-s
3 Aug 2024	9:00 AM	SSE	0.7
3 Aug 2024	10:00 AM	SSE	1.1
3 Aug 2024	11:00 AM	S	1.3
3 Aug 2024	12:00 PM	SSE	1.2
3 Aug 2024	1:00 PM	SSE	1.2
3 Aug 2024	2:00 PM	S	1.3
3 Aug 2024	3:00 PM	SSE	1.3
3 Aug 2024	4:00 PM	ESE	1.9
3 Aug 2024	5:00 PM	SE	1.5
3 Aug 2024	6:00 PM	SE	1.5
3 Aug 2024	7:00 PM	SE	1.2
3 Aug 2024	8:00 PM	SSE	0.9
3 Aug 2024	9:00 PM	S	0.7
3 Aug 2024	10:00 PM	S	1.1
3 Aug 2024	11:00 PM	SSW	0.9
4 Aug 2024	12:00 AM	SSE	0.7
4 Aug 2024	1:00 AM	SSE	0.9
4 Aug 2024	2:00 AM	S	0.8
4 Aug 2024	3:00 AM	SSE	0.6
4 Aug 2024	4:00 AM	SSE	0.5
4 Aug 2024	5:00 AM	SSE	0.7
4 Aug 2024	6:00 AM	S	0.5
4 Aug 2024	7:00 AM	SSE	0.6
4 Aug 2024	8:00 AM	SSE	1.0
4 Aug 2024	9:00 AM	SE	1.5
4 Aug 2024	10:00 AM	SSE	1.4
4 Aug 2024	11:00 AM	SSE	2.2
4 Aug 2024	12:00 PM	SSE	1.4
4 Aug 2024	1:00 PM	SE	1.2
4 Aug 2024	2:00 PM	SSE	1.3
4 Aug 2024	3:00 PM	SSE	1.3
4 Aug 2024	4:00 PM	SE	1.2
4 Aug 2024	5:00 PM	SE	0.8
4 Aug 2024	6:00 PM	SSE	0.8
4 Aug 2024	7:00 PM	SSE	0.7
4 Aug 2024	8:00 PM	SSE	0.7
4 Aug 2024	9:00 PM	SSE	0.9
4 Aug 2024	10:00 PM	SSE	0.8
4 Aug 2024	11:00 PM	SW	1.4
5 Aug 2024	12:00 AM	SSW	1.0
5 Aug 2024	1:00 AM	SSW	0.8
5 Aug 2024	2:00 AM	S	0.6
5 Aug 2024	3:00 AM	S	0.6
5 Aug 2024	4:00 AM	S	0.5
5 Aug 2024	5:00 AM	SSE	0.3
5 Aug 2024	6:00 AM	SSE	0.5
5 Aug 2024	7:00 AM	S	0.8
5 Aug 2024	8:00 AM	S	1.4
5 Aug 2024	9:00 AM	SSE	1.6
5 Aug 2024	10:00 AM	SSE	1.2
5 Aug 2024	11:00 AM	SSE	1.4
5 Aug 2024	12:00 PM	SE	1.2
5 Aug 2024	1:00 PM	SE	1.4
5 Aug 2024	2:00 PM	SSE	1.4
5 Aug 2024	3:00 PM	SSE	1.6
5 Aug 2024	4:00 PM	SSE	0.9
5 Aug 2024	5:00 PM	SSW	0.9

Appendix C - Weather Conditions

August 2024			
Wind Speed and Directions			
Date	Time	Direction	Wind Speed m-s
5 Aug 2024	6:00 PM	S	1.6
5 Aug 2024	7:00 PM	SSE	1.5
5 Aug 2024	8:00 PM	S	0.9
5 Aug 2024	9:00 PM	SSE	0.9
5 Aug 2024	10:00 PM	S	0.9
5 Aug 2024	11:00 PM	S	0.6
6 Aug 2024	12:00 AM	S	0.7
6 Aug 2024	1:00 AM	SSE	0.6
6 Aug 2024	2:00 AM	SSW	0.7
6 Aug 2024	3:00 AM	SSW	0.7
6 Aug 2024	4:00 AM	S	0.7
6 Aug 2024	5:00 AM	SSE	1.0
6 Aug 2024	6:00 AM	S	0.7
6 Aug 2024	7:00 AM	SSE	0.8
6 Aug 2024	8:00 AM	S	0.9
6 Aug 2024	9:00 AM	S	1.1
6 Aug 2024	10:00 AM	SSE	1.0
6 Aug 2024	11:00 AM	SSW	1.0
6 Aug 2024	12:00 PM	S	1.8
6 Aug 2024	1:00 PM	S	1.5
6 Aug 2024	2:00 PM	SSE	0.9
6 Aug 2024	3:00 PM	SSW	1.0
6 Aug 2024	4:00 PM	S	1.2
6 Aug 2024	5:00 PM	S	1.3
6 Aug 2024	6:00 PM	S	1.8
6 Aug 2024	7:00 PM	S	0.9
6 Aug 2024	8:00 PM	SSE	0.8
6 Aug 2024	9:00 PM	S	0.6
6 Aug 2024	10:00 PM	SSW	0.9
6 Aug 2024	11:00 PM	S	1.0
7 Aug 2024	12:00 AM	SSE	0.7
7 Aug 2024	1:00 AM	S	0.5
7 Aug 2024	2:00 AM	S	0.5
7 Aug 2024	3:00 AM	SSE	0.6
7 Aug 2024	4:00 AM	S	0.6
7 Aug 2024	5:00 AM	S	0.6
7 Aug 2024	6:00 AM	S	0.5
7 Aug 2024	7:00 AM	S	0.6
7 Aug 2024	8:00 AM	SW	0.9
7 Aug 2024	9:00 AM	S	1.0
7 Aug 2024	10:00 AM	SSW	1.1
7 Aug 2024	11:00 AM	S	1.0
7 Aug 2024	12:00 PM	S	1.1
7 Aug 2024	1:00 PM	S	1.0
7 Aug 2024	2:00 PM	S	1.3
7 Aug 2024	3:00 PM	SSE	1.7
7 Aug 2024	4:00 PM	SSE	1.0
7 Aug 2024	5:00 PM	SSE	1.0
7 Aug 2024	6:00 PM	SSE	0.9
7 Aug 2024	7:00 PM	SE	1.0
7 Aug 2024	8:00 PM	SSE	0.9
7 Aug 2024	9:00 PM	S	0.7
7 Aug 2024	10:00 PM	S	0.9
7 Aug 2024	11:00 PM	SSE	1.0
8 Aug 2024	12:00 AM	S	1.0
8 Aug 2024	1:00 AM	SSE	0.9
8 Aug 2024	2:00 AM	SSE	1.2

Appendix C - Weather Conditions

August 2024			
Wind Speed and Directions			
Date	Time	Direction	Wind Speed m-s
8 Aug 2024	3:00 AM	S	1.0
8 Aug 2024	4:00 AM	S	1.1
8 Aug 2024	5:00 AM	S	1.0
8 Aug 2024	6:00 AM	SSE	0.7
8 Aug 2024	7:00 AM	SSE	1.0
8 Aug 2024	8:00 AM	SE	1.1
8 Aug 2024	9:00 AM	SE	1.1
8 Aug 2024	10:00 AM	SSE	1.0
8 Aug 2024	11:00 AM	SSE	1.3
8 Aug 2024	12:00 PM	SSE	1.4
8 Aug 2024	1:00 PM	SSE	1.2
8 Aug 2024	2:00 PM	SSE	1.3
8 Aug 2024	3:00 PM	S	1.2
8 Aug 2024	4:00 PM	SSE	1.1
8 Aug 2024	5:00 PM	SSE	1.2
8 Aug 2024	6:00 PM	SE	1.0
8 Aug 2024	7:00 PM	S	1.0
8 Aug 2024	8:00 PM	SSE	1.1
8 Aug 2024	9:00 PM	SSW	1.0
8 Aug 2024	10:00 PM	SSW	1.0
8 Aug 2024	11:00 PM	S	0.8
9 Aug 2024	12:00 AM	S	0.8
9 Aug 2024	1:00 AM	SSE	1.2
9 Aug 2024	2:00 AM	S	1.2
9 Aug 2024	3:00 AM	S	1.4
9 Aug 2024	4:00 AM	S	1.1
9 Aug 2024	5:00 AM	SSE	1.1
9 Aug 2024	6:00 AM	SSE	1.1
9 Aug 2024	7:00 AM	SE	1.0
9 Aug 2024	8:00 AM	SE	1.3
9 Aug 2024	9:00 AM	SSE	1.0
9 Aug 2024	10:00 AM	SSE	0.9
9 Aug 2024	11:00 AM	S	1.1
9 Aug 2024	12:00 PM	S	1.5
9 Aug 2024	1:00 PM	SSE	1.4
9 Aug 2024	2:00 PM	ESE	1.4
9 Aug 2024	3:00 PM	S	1.4
9 Aug 2024	4:00 PM	SSE	1.6
9 Aug 2024	5:00 PM	SE	1.8
9 Aug 2024	6:00 PM	SSE	1.4
9 Aug 2024	7:00 PM	SE	1.4
9 Aug 2024	8:00 PM	SSE	1.1
9 Aug 2024	9:00 PM	SSE	0.8
9 Aug 2024	10:00 PM	S	0.7
9 Aug 2024	11:00 PM	S	1.0
10 Aug 2024	12:00 AM	SSE	1.1
10 Aug 2024	1:00 AM	SE	1.3
10 Aug 2024	2:00 AM	SE	1.4
10 Aug 2024	3:00 AM	SSE	1.1
10 Aug 2024	4:00 AM	SSE	1.0
10 Aug 2024	5:00 AM	SSE	1.0
10 Aug 2024	6:00 AM	SSE	1.0
10 Aug 2024	7:00 AM	SSE	1.2
10 Aug 2024	8:00 AM	SSE	1.1
10 Aug 2024	9:00 AM	SE	1.0
10 Aug 2024	10:00 AM	SSE	1.3
10 Aug 2024	11:00 AM	SE	1.7

Appendix C - Weather Conditions

August 2024			
Wind Speed and Directions			
Date	Time	Direction	Wind Speed m-s
10 Aug 2024	12:00 PM	SE	1.3
10 Aug 2024	1:00 PM	SE	1.6
10 Aug 2024	2:00 PM	SSE	1.5
10 Aug 2024	3:00 PM	SSE	1.4
10 Aug 2024	4:00 PM	SE	1.3
10 Aug 2024	5:00 PM	SSE	1.4
10 Aug 2024	6:00 PM	SE	1.4
10 Aug 2024	7:00 PM	SSE	1.2
10 Aug 2024	8:00 PM	S	1.0
10 Aug 2024	9:00 PM	W	1.4
10 Aug 2024	10:00 PM	SW	0.9
10 Aug 2024	11:00 PM	S	0.9
11 Aug 2024	12:00 AM	SE	1.2
11 Aug 2024	1:00 AM	SSE	1.0
11 Aug 2024	2:00 AM	S	0.8
11 Aug 2024	3:00 AM	SSE	0.8
11 Aug 2024	4:00 AM	S	0.9
11 Aug 2024	5:00 AM	S	0.7
11 Aug 2024	6:00 AM	SSE	1.0
11 Aug 2024	7:00 AM	S	0.9
11 Aug 2024	8:00 AM	S	1.0
11 Aug 2024	9:00 AM	SE	1.2
11 Aug 2024	10:00 AM	SSE	1.0
11 Aug 2024	11:00 AM	S	1.4
11 Aug 2024	12:00 PM	SSW	1.3
11 Aug 2024	1:00 PM	W	1.7
11 Aug 2024	2:00 PM	SW	2.0
11 Aug 2024	3:00 PM	SSE	0.9
11 Aug 2024	4:00 PM	SE	1.3
11 Aug 2024	5:00 PM	SSE	0.9
11 Aug 2024	6:00 PM	SE	0.9
11 Aug 2024	7:00 PM	SE	0.9
11 Aug 2024	8:00 PM	S	0.9
11 Aug 2024	9:00 PM	SSE	1.0
11 Aug 2024	10:00 PM	S	0.7
11 Aug 2024	11:00 PM	SSE	0.8
12 Aug 2024	12:00 AM	SSE	0.7
12 Aug 2024	1:00 AM	S	0.8
12 Aug 2024	2:00 AM	S	0.9
12 Aug 2024	3:00 AM	SW	0.5
12 Aug 2024	4:00 AM	S	0.2
12 Aug 2024	5:00 AM	S	0.5
12 Aug 2024	6:00 AM	S	0.5
12 Aug 2024	7:00 AM	S	0.9
12 Aug 2024	8:00 AM	S	1.3
12 Aug 2024	9:00 AM	WSW	0.8
12 Aug 2024	10:00 AM	S	0.7
12 Aug 2024	11:00 AM	S	0.5
12 Aug 2024	12:00 PM	SE	0.9
12 Aug 2024	1:00 PM	SE	1.1
12 Aug 2024	2:00 PM	SSW	1.4
12 Aug 2024	3:00 PM	SSW	1.4
12 Aug 2024	4:00 PM	SE	1.2
12 Aug 2024	5:00 PM	S	1.3
12 Aug 2024	6:00 PM	SSE	1.0
12 Aug 2024	7:00 PM	SE	0.8
12 Aug 2024	8:00 PM	SSE	0.7

Appendix C - Weather Conditions

August 2024			
Wind Speed and Directions			
Date	Time	Direction	Wind Speed m-s
12 Aug 2024	9:00 PM	SSE	0.5
12 Aug 2024	10:00 PM	S	0.9
12 Aug 2024	11:00 PM	SSE	0.9
13 Aug 2024	12:00 AM	SSE	0.6
13 Aug 2024	1:00 AM	S	0.5
13 Aug 2024	2:00 AM	S	1.4
13 Aug 2024	3:00 AM	SSE	0.1
13 Aug 2024	4:00 AM	SE	0.5
13 Aug 2024	5:00 AM	SSE	0.3
13 Aug 2024	6:00 AM	S	0.4
13 Aug 2024	7:00 AM	SSW	0.8
13 Aug 2024	8:00 AM	SSW	1.1
13 Aug 2024	9:00 AM	SSE	1.1
13 Aug 2024	10:00 AM	S	1.0
13 Aug 2024	11:00 AM	S	0.9
13 Aug 2024	12:00 PM	SSE	1.0
13 Aug 2024	1:00 PM	SE	1.0
13 Aug 2024	2:00 PM	SE	1.7
13 Aug 2024	3:00 PM	SSE	1.4
13 Aug 2024	4:00 PM	S	0.7
13 Aug 2024	5:00 PM	S	0.7
13 Aug 2024	6:00 PM	S	1.0
13 Aug 2024	7:00 PM	SSE	0.9
13 Aug 2024	8:00 PM	S	0.8
13 Aug 2024	9:00 PM	S	0.6
13 Aug 2024	10:00 PM	SSE	0.7
13 Aug 2024	11:00 PM	S	0.7
14 Aug 2024	12:00 AM	S	0.5
14 Aug 2024	1:00 AM	SSE	0.5
14 Aug 2024	2:00 AM	SSE	0.4
14 Aug 2024	3:00 AM	SSW	0.4
14 Aug 2024	4:00 AM	S	0.6
14 Aug 2024	5:00 AM	SSE	0.5
14 Aug 2024	6:00 AM	S	0.5
14 Aug 2024	7:00 AM	SSW	0.8
14 Aug 2024	8:00 AM	S	1.1
14 Aug 2024	9:00 AM	S	1.0
14 Aug 2024	10:00 AM	SSE	0.7
14 Aug 2024	11:00 AM	SSW	0.6
14 Aug 2024	12:00 PM	SSE	0.9
14 Aug 2024	1:00 PM	SSE	0.7
14 Aug 2024	2:00 PM	S	0.9
14 Aug 2024	3:00 PM	SW	0.8
14 Aug 2024	4:00 PM	SW	0.3
14 Aug 2024	5:00 PM	S	0.6
14 Aug 2024	6:00 PM	SSW	0.4
14 Aug 2024	7:00 PM	SSE	0.7
14 Aug 2024	8:00 PM	S	0.6
14 Aug 2024	9:00 PM	S	0.2
14 Aug 2024	10:00 PM	S	0.3
14 Aug 2024	11:00 PM	SSE	0.5
15 Aug 2024	12:00 AM	SSE	0.5
15 Aug 2024	1:00 AM	S	0.0
15 Aug 2024	2:00 AM	SSE	0.1
15 Aug 2024	3:00 AM	S	0.6
15 Aug 2024	4:00 AM	S	0.1
15 Aug 2024	5:00 AM	SSE	0.1

Appendix C - Weather Conditions

August 2024			
Wind Speed and Directions			
Date	Time	Direction	Wind Speed m-s
15 Aug 2024	6:00 AM	S	0.2
15 Aug 2024	7:00 AM	S	0.0
15 Aug 2024	8:00 AM	S	0.7
15 Aug 2024	9:00 AM	SSE	0.6
15 Aug 2024	10:00 AM	SSW	0.9
15 Aug 2024	11:00 AM	SSE	1.3
15 Aug 2024	12:00 PM	S	0.3
15 Aug 2024	1:00 PM	SSE	0.5
15 Aug 2024	2:00 PM	SSW	0.2
15 Aug 2024	3:00 PM	SSW	0.3
15 Aug 2024	4:00 PM	SSE	0.7
15 Aug 2024	5:00 PM	SSE	0.5
15 Aug 2024	6:00 PM	SE	0.4
15 Aug 2024	7:00 PM	S	0.4
15 Aug 2024	8:00 PM	S	0.5
15 Aug 2024	9:00 PM	SSE	0.2
15 Aug 2024	10:00 PM	S	0.1
15 Aug 2024	11:00 PM	SSE	0.1
16 Aug 2024	12:00 AM	SSE	0.0
16 Aug 2024	1:00 AM	S	0.2
16 Aug 2024	2:00 AM	S	0.3
16 Aug 2024	3:00 AM	S	0.1
16 Aug 2024	4:00 AM	SSE	0.1
16 Aug 2024	5:00 AM	SSE	0.1
16 Aug 2024	6:00 AM	S	0.4
16 Aug 2024	7:00 AM	S	1.1
16 Aug 2024	8:00 AM	S	1.3
16 Aug 2024	9:00 AM	S	0.6
16 Aug 2024	10:00 AM	SSW	1.0
16 Aug 2024	11:00 AM	S	1.0
16 Aug 2024	12:00 PM	S	0.9
16 Aug 2024	1:00 PM	SW	1.8
16 Aug 2024	2:00 PM	SSE	1.3
16 Aug 2024	3:00 PM	S	1.3
16 Aug 2024	4:00 PM	SW	1.5
16 Aug 2024	5:00 PM	WSW	1.7
16 Aug 2024	6:00 PM	SSW	1.4
16 Aug 2024	7:00 PM	SSW	0.6
16 Aug 2024	8:00 PM	S	0.8
16 Aug 2024	9:00 PM	S	0.8
16 Aug 2024	10:00 PM	SSE	0.6
16 Aug 2024	11:00 PM	SSE	0.6
17 Aug 2024	12:00 AM	S	0.6
17 Aug 2024	1:00 AM	S	0.5
17 Aug 2024	2:00 AM	SSE	0.6
17 Aug 2024	3:00 AM	SSE	0.4
17 Aug 2024	4:00 AM	S	0.4
17 Aug 2024	5:00 AM	SSW	0.8
17 Aug 2024	6:00 AM	SSE	0.7
17 Aug 2024	7:00 AM	SSW	0.6
17 Aug 2024	8:00 AM	SSW	0.4
17 Aug 2024	9:00 AM	S	0.9
17 Aug 2024	10:00 AM	S	0.2
17 Aug 2024	11:00 AM	S	0.3
17 Aug 2024	12:00 PM	S	0.8
17 Aug 2024	1:00 PM	SSE	0.4
17 Aug 2024	2:00 PM	SSE	0.3

Appendix C - Weather Conditions

August 2024			
Wind Speed and Directions			
Date	Time	Direction	Wind Speed m-s
17 Aug 2024	3:00 PM	SE	0.4
17 Aug 2024	4:00 PM	S	0.7
17 Aug 2024	5:00 PM	SE	1.0
17 Aug 2024	6:00 PM	SE	0.8
17 Aug 2024	7:00 PM	S	0.5
17 Aug 2024	8:00 PM	S	0.2
17 Aug 2024	9:00 PM	S	0.6
17 Aug 2024	10:00 PM	SSW	0.5
17 Aug 2024	11:00 PM	SSE	0.1
18 Aug 2024	12:00 AM	S	0.1
18 Aug 2024	1:00 AM	SSW	0.2
18 Aug 2024	2:00 AM	SSE	0.6
18 Aug 2024	3:00 AM	SSE	0.6
18 Aug 2024	4:00 AM	S	0.7
18 Aug 2024	5:00 AM	S	0.9
18 Aug 2024	6:00 AM	SSE	1.3
18 Aug 2024	7:00 AM	SSE	1.0
18 Aug 2024	8:00 AM	S	1.0
18 Aug 2024	9:00 AM	S	0.5
18 Aug 2024	10:00 AM	SE	0.8
18 Aug 2024	11:00 AM	S	0.6
18 Aug 2024	12:00 PM	SSE	0.5
18 Aug 2024	1:00 PM	S	0.7
18 Aug 2024	2:00 PM	SSE	0.5
18 Aug 2024	3:00 PM	S	1.2
18 Aug 2024	4:00 PM	SSE	1.3
18 Aug 2024	5:00 PM	SSE	0.9
18 Aug 2024	6:00 PM	SSE	0.9
18 Aug 2024	7:00 PM	SSW	0.4
18 Aug 2024	8:00 PM	S	0.3
18 Aug 2024	9:00 PM	S	0.5
18 Aug 2024	10:00 PM	S	0.2
18 Aug 2024	11:00 PM	S	0.1
19 Aug 2024	12:00 AM	SSE	0.1
19 Aug 2024	1:00 AM	S	0.5
19 Aug 2024	2:00 AM	SSE	1.6
19 Aug 2024	3:00 AM	SSE	1.2
19 Aug 2024	4:00 AM	SSE	1.4
19 Aug 2024	5:00 AM	SE	1.6
19 Aug 2024	6:00 AM	SSE	1.3
19 Aug 2024	7:00 AM	SSE	1.2
19 Aug 2024	8:00 AM	SSE	1.1
19 Aug 2024	9:00 AM	S	1.1
19 Aug 2024	10:00 AM	S	0.7
19 Aug 2024	11:00 AM	W	1.1
19 Aug 2024	12:00 PM	SSE	0.5
19 Aug 2024	1:00 PM	S	0.3
19 Aug 2024	2:00 PM	SW	0.3
19 Aug 2024	3:00 PM	W	1.0
19 Aug 2024	4:00 PM	WNW	0.7
19 Aug 2024	5:00 PM	WNW	1.3
19 Aug 2024	6:00 PM	SSE	0.7
19 Aug 2024	7:00 PM	SSE	0.1
19 Aug 2024	8:00 PM	S	0.5
19 Aug 2024	9:00 PM	SW	0.1
19 Aug 2024	10:00 PM	SSE	0.4
19 Aug 2024	11:00 PM	SSE	0.7

Appendix C - Weather Conditions

August 2024			
Wind Speed and Directions			
Date	Time	Direction	Wind Speed m-s
20 Aug 2024	12:00 AM	SSE	1.5
20 Aug 2024	1:00 AM	SSE	1.3
20 Aug 2024	2:00 AM	SSE	1.2
20 Aug 2024	3:00 AM	SSE	1.2
20 Aug 2024	4:00 AM	SSE	0.9
20 Aug 2024	5:00 AM	SSE	0.7
20 Aug 2024	6:00 AM	SSW	1.2
20 Aug 2024	7:00 AM	S	0.2
20 Aug 2024	8:00 AM	SSE	0.2
20 Aug 2024	9:00 AM	SE	0.8
20 Aug 2024	10:00 AM	SE	0.7
20 Aug 2024	11:00 AM	S	0.8
20 Aug 2024	12:00 PM	SSW	0.7
20 Aug 2024	1:00 PM	SE	0.8
20 Aug 2024	2:00 PM	SSE	0.8
20 Aug 2024	3:00 PM	S	1.0
20 Aug 2024	4:00 PM	SSE	2.0
20 Aug 2024	5:00 PM	SSE	2.0
20 Aug 2024	6:00 PM	S	1.6
20 Aug 2024	7:00 PM	S	1.5
20 Aug 2024	8:00 PM	S	0.8
20 Aug 2024	9:00 PM	SSE	1.1
20 Aug 2024	10:00 PM	SSW	0.8
20 Aug 2024	11:00 PM	S	0.7
21 Aug 2024	12:00 AM	SSE	0.7
21 Aug 2024	1:00 AM	S	0.7
21 Aug 2024	2:00 AM	S	0.3
21 Aug 2024	3:00 AM	WSW	0.4
21 Aug 2024	4:00 AM	WNW	1.5
21 Aug 2024	5:00 AM	SSW	0.2
21 Aug 2024	6:00 AM	S	0.3
21 Aug 2024	7:00 AM	S	0.2
21 Aug 2024	8:00 AM	SSE	0.7
21 Aug 2024	9:00 AM	SSE	2.2
21 Aug 2024	10:00 AM	S	1.5
21 Aug 2024	11:00 AM	SSE	1.4
21 Aug 2024	12:00 PM	SE	0.6
21 Aug 2024	1:00 PM	SW	0.4
21 Aug 2024	2:00 PM	SSW	0.5
21 Aug 2024	3:00 PM	SSW	0.7
21 Aug 2024	4:00 PM	SSE	0.1
21 Aug 2024	5:00 PM	S	0.0
21 Aug 2024	6:00 PM	SSE	0.0
21 Aug 2024	7:00 PM	S	0.2
21 Aug 2024	8:00 PM	SE	0.0
21 Aug 2024	9:00 PM	SSE	0.0
21 Aug 2024	10:00 PM	SE	0.0
21 Aug 2024	11:00 PM	SSE	0.0
22 Aug 2024	12:00 AM	SSW	0.0
22 Aug 2024	1:00 AM	SSE	0.1
22 Aug 2024	2:00 AM	SSW	0.0
22 Aug 2024	3:00 AM	SSW	0.0
22 Aug 2024	4:00 AM	SSW	0.0
22 Aug 2024	5:00 AM	S	0.0
22 Aug 2024	6:00 AM	S	0.0
22 Aug 2024	7:00 AM	SSE	0.0
22 Aug 2024	8:00 AM	S	0.1

Appendix C - Weather Conditions

August 2024			
Wind Speed and Directions			
Date	Time	Direction	Wind Speed m-s
22 Aug 2024	9:00 AM	ESE	0.2
22 Aug 2024	10:00 AM	SSE	0.5
22 Aug 2024	11:00 AM	S	1.3
22 Aug 2024	12:00 PM	S	1.3
22 Aug 2024	1:00 PM	S	1.7
22 Aug 2024	2:00 PM	SW	1.7
22 Aug 2024	3:00 PM	SSW	1.1
22 Aug 2024	4:00 PM	SSW	1.1
22 Aug 2024	5:00 PM	SSW	0.7
22 Aug 2024	6:00 PM	S	0.6
22 Aug 2024	7:00 PM	SSE	0.6
22 Aug 2024	8:00 PM	S	0.5
22 Aug 2024	9:00 PM	SSE	0.8
22 Aug 2024	10:00 PM	S	0.4
22 Aug 2024	11:00 PM	SSE	0.3
23 Aug 2024	12:00 AM	SSW	0.3
23 Aug 2024	1:00 AM	SSE	0.3
23 Aug 2024	2:00 AM	S	0.1
23 Aug 2024	3:00 AM	S	0.3
23 Aug 2024	4:00 AM	S	0.6
23 Aug 2024	5:00 AM	S	0.6
23 Aug 2024	6:00 AM	SSE	0.3
23 Aug 2024	7:00 AM	S	0.6
23 Aug 2024	8:00 AM	SSW	1.1
23 Aug 2024	9:00 AM	SE	1.2
23 Aug 2024	10:00 AM	SSE	1.1
23 Aug 2024	11:00 AM	SSE	1.3
23 Aug 2024	12:00 PM	SSE	1.2
23 Aug 2024	1:00 PM	SSE	1.2
23 Aug 2024	2:00 PM	SSE	1.1
23 Aug 2024	3:00 PM	S	1.2
23 Aug 2024	4:00 PM	SSW	1.1
23 Aug 2024	5:00 PM	SE	0.7
23 Aug 2024	6:00 PM	S	0.7
23 Aug 2024	7:00 PM	SSE	0.7
23 Aug 2024	8:00 PM	SSW	0.5
23 Aug 2024	9:00 PM	SSE	0.8
23 Aug 2024	10:00 PM	S	0.6
23 Aug 2024	11:00 PM	S	0.4
24 Aug 2024	12:00 AM	S	0.5
24 Aug 2024	1:00 AM	SSE	0.4
24 Aug 2024	2:00 AM	S	0.5
24 Aug 2024	3:00 AM	SSW	0.7
24 Aug 2024	4:00 AM	SSE	0.7
24 Aug 2024	5:00 AM	S	0.6
24 Aug 2024	6:00 AM	SSE	0.8
24 Aug 2024	7:00 AM	SSE	0.9
24 Aug 2024	8:00 AM	SSE	1.2
24 Aug 2024	9:00 AM	SSE	1.2
24 Aug 2024	10:00 AM	SSE	1.5
24 Aug 2024	11:00 AM	SE	1.1
24 Aug 2024	12:00 PM	SE	1.0
24 Aug 2024	1:00 PM	S	1.6
24 Aug 2024	2:00 PM	SSE	1.4
24 Aug 2024	3:00 PM	SSE	1.2
24 Aug 2024	4:00 PM	SSE	1.0
24 Aug 2024	5:00 PM	WSW	1.6

Appendix C - Weather Conditions

August 2024			
Wind Speed and Directions			
Date	Time	Direction	Wind Speed m-s
24 Aug 2024	6:00 PM	S	1.2
24 Aug 2024	7:00 PM	W	1.3
24 Aug 2024	8:00 PM	S	0.7
24 Aug 2024	9:00 PM	SSE	0.5
24 Aug 2024	10:00 PM	S	0.6
24 Aug 2024	11:00 PM	S	0.6
25 Aug 2024	12:00 AM	SSE	0.5
25 Aug 2024	1:00 AM	SSW	0.4
25 Aug 2024	2:00 AM	S	0.7
25 Aug 2024	3:00 AM	S	0.5
25 Aug 2024	4:00 AM	S	0.4
25 Aug 2024	5:00 AM	SSE	0.5
25 Aug 2024	6:00 AM	S	0.1
25 Aug 2024	7:00 AM	W	1.1
25 Aug 2024	8:00 AM	S	1.0
25 Aug 2024	9:00 AM	SSE	1.0
25 Aug 2024	10:00 AM	SSE	0.9
25 Aug 2024	11:00 AM	SE	1.2
25 Aug 2024	12:00 PM	SSE	1.4
25 Aug 2024	1:00 PM	SSE	1.2
25 Aug 2024	2:00 PM	WSW	2.1
25 Aug 2024	3:00 PM	WSW	1.9
25 Aug 2024	4:00 PM	SW	1.0
25 Aug 2024	5:00 PM	SSE	0.7
25 Aug 2024	6:00 PM	SE	0.9
25 Aug 2024	7:00 PM	SE	1.0
25 Aug 2024	8:00 PM	S	0.8
25 Aug 2024	9:00 PM	S	0.7
25 Aug 2024	10:00 PM	SSW	0.8
25 Aug 2024	11:00 PM	SSW	0.9
26 Aug 2024	12:00 AM	SSW	0.9
26 Aug 2024	1:00 AM	S	0.4
26 Aug 2024	2:00 AM	S	0.5
26 Aug 2024	3:00 AM	SSE	0.5
26 Aug 2024	4:00 AM	SSE	0.5
26 Aug 2024	5:00 AM	SSE	0.5
26 Aug 2024	6:00 AM	S	0.5
26 Aug 2024	7:00 AM	S	0.7
26 Aug 2024	8:00 AM	SE	0.8
26 Aug 2024	9:00 AM	S	0.9
26 Aug 2024	10:00 AM	SSE	1.2
26 Aug 2024	11:00 AM	SSE	1.1
26 Aug 2024	12:00 PM	SE	1.2
26 Aug 2024	1:00 PM	S	1.5
26 Aug 2024	2:00 PM	SSE	1.3
26 Aug 2024	3:00 PM	SSE	1.2
26 Aug 2024	4:00 PM	SSE	1.0
26 Aug 2024	5:00 PM	SE	0.8
26 Aug 2024	6:00 PM	SSE	0.7
26 Aug 2024	7:00 PM	SSE	1.4
26 Aug 2024	8:00 PM	SSW	1.2
26 Aug 2024	9:00 PM	SE	1.3
26 Aug 2024	10:00 PM	S	0.7
26 Aug 2024	11:00 PM	S	0.6
27 Aug 2024	12:00 AM	S	1.0
27 Aug 2024	1:00 AM	S	0.7
27 Aug 2024	2:00 AM	SSW	0.5

Appendix C - Weather Conditions

August 2024			
Wind Speed and Directions			
Date	Time	Direction	Wind Speed m-s
27 Aug 2024	3:00 AM	S	0.4
27 Aug 2024	4:00 AM	S	0.4
27 Aug 2024	5:00 AM	SSE	0.4
27 Aug 2024	6:00 AM	SSE	0.6
27 Aug 2024	7:00 AM	SE	0.8
27 Aug 2024	8:00 AM	SSE	0.9
27 Aug 2024	9:00 AM	SSE	1.0
27 Aug 2024	10:00 AM	S	1.2
27 Aug 2024	11:00 AM	SSE	1.3
27 Aug 2024	12:00 PM	SSE	1.7
27 Aug 2024	1:00 PM	SSE	1.9
27 Aug 2024	2:00 PM	S	1.5
27 Aug 2024	3:00 PM	S	1.0
27 Aug 2024	4:00 PM	SSE	1.0
27 Aug 2024	5:00 PM	SSE	0.5
27 Aug 2024	6:00 PM	SW	1.0
27 Aug 2024	7:00 PM	S	0.8
27 Aug 2024	8:00 PM	SSW	0.8
27 Aug 2024	9:00 PM	SE	0.8
27 Aug 2024	10:00 PM	SE	1.2
27 Aug 2024	11:00 PM	SSE	0.9
28 Aug 2024	12:00 AM	SSE	0.5
28 Aug 2024	1:00 AM	S	0.9
28 Aug 2024	2:00 AM	SSE	0.9
28 Aug 2024	3:00 AM	S	0.8
28 Aug 2024	4:00 AM	SSW	0.6
28 Aug 2024	5:00 AM	WSW	0.8
28 Aug 2024	6:00 AM	SW	0.6
28 Aug 2024	7:00 AM	W	1.0
28 Aug 2024	8:00 AM	S	0.8
28 Aug 2024	9:00 AM	S	1.1
28 Aug 2024	10:00 AM	SSE	1.4
28 Aug 2024	11:00 AM	SE	1.5
28 Aug 2024	12:00 PM	SSE	1.4
28 Aug 2024	1:00 PM	SE	1.3
28 Aug 2024	2:00 PM	SE	1.5

Appendix C - Weather Conditions

August 2024			
Wind Speed and Directions			
Date	Time	Direction	Wind Speed m-s
28 Aug 2024	3:00 PM	S	1.2
28 Aug 2024	4:00 PM	S	1.3
28 Aug 2024	5:00 PM	SSW	2.2
28 Aug 2024	6:00 PM	SSW	1.6
28 Aug 2024	7:00 PM	SSE	0.8
28 Aug 2024	8:00 PM	SSW	1.0
28 Aug 2024	9:00 PM	SSW	1.0
28 Aug 2024	10:00 PM	SSW	1.0
28 Aug 2024	11:00 PM	SSE	1.1
29 Aug 2024	12:00 AM	SSE	0.8
29 Aug 2024	1:00 AM	SSW	0.5
29 Aug 2024	2:00 AM	SW	0.6
29 Aug 2024	3:00 AM	S	0.3
29 Aug 2024	4:00 AM	S	0.2
29 Aug 2024	5:00 AM	S	0.5
29 Aug 2024	6:00 AM	SSE	0.6
29 Aug 2024	7:00 AM	SSE	0.8
29 Aug 2024	8:00 AM	SSW	1.9
29 Aug 2024	9:00 AM	S	1.1
29 Aug 2024	10:00 AM	S	1.1
29 Aug 2024	11:00 AM	SW	1.1
29 Aug 2024	12:00 PM	WNW	2.0
29 Aug 2024	1:00 PM	WSW	1.7
29 Aug 2024	2:00 PM	SSW	1.4
29 Aug 2024	3:00 PM	W	1.9
29 Aug 2024	4:00 PM	SW	1.2
29 Aug 2024	5:00 PM	SW	1.1
29 Aug 2024	6:00 PM	S	1.3
29 Aug 2024	7:00 PM	SSE	1.4
29 Aug 2024	8:00 PM	SW	0.9
29 Aug 2024	9:00 PM	SSE	0.8
29 Aug 2024	10:00 PM	SSW	0.6
29 Aug 2024	11:00 PM	SSW	0.0
30 Aug 2024	12:00 AM	S	0.4
30 Aug 2024	1:00 AM	S	0.3
30 Aug 2024	2:00 AM	S	0.4
30 Aug 2024	3:00 AM	S	0.2
30 Aug 2024	4:00 AM	S	0.2
30 Aug 2024	5:00 AM	S	0.0
30 Aug 2024	6:00 AM	S	0.8
30 Aug 2024	7:00 AM	S	0.9
30 Aug 2024	8:00 AM	S	1.0
30 Aug 2024	9:00 AM	SSW	1.0
30 Aug 2024	10:00 AM	SSW	1.3
30 Aug 2024	11:00 AM	SSW	1.1
30 Aug 2024	12:00 PM	S	1.1
30 Aug 2024	1:00 PM	SSE	1.8
30 Aug 2024	2:00 PM	S	1.2
30 Aug 2024	3:00 PM	SSW	0.4
30 Aug 2024	4:00 PM	W	1.7
30 Aug 2024	5:00 PM	WNW	1.8
30 Aug 2024	6:00 PM	SW	0.8
30 Aug 2024	7:00 PM	SSW	0.9
30 Aug 2024	8:00 PM	WSW	1.2
30 Aug 2024	9:00 PM	WSW	0.9
30 Aug 2024	10:00 PM	SW	0.7
30 Aug 2024	11:00 PM	SSW	0.5

Appendix C - Weather Conditions

August 2024			
Wind Speed and Directions			
Date	Time	Direction	Wind Speed m-s
31 Aug 2024	12:00 AM	WSW	1.2
31 Aug 2024	1:00 AM	S	1.5
31 Aug 2024	2:00 AM	SSE	1.4
31 Aug 2024	3:00 AM	SSE	0.8
31 Aug 2024	4:00 AM	S	0.9
31 Aug 2024	5:00 AM	S	0.4
31 Aug 2024	6:00 AM	S	0.4
31 Aug 2024	7:00 AM	S	1.1
31 Aug 2024	8:00 AM	S	1.9
31 Aug 2024	9:00 AM	S	2.3
31 Aug 2024	10:00 AM	SSW	2.0
31 Aug 2024	11:00 AM	SW	2.6
31 Aug 2024	12:00 PM	SW	2.2
31 Aug 2024	1:00 PM	SW	2.2
31 Aug 2024	2:00 PM	SW	1.5
31 Aug 2024	3:00 PM	W	2.5
31 Aug 2024	4:00 PM	WSW	2.5
31 Aug 2024	5:00 PM	W	2.3
31 Aug 2024	6:00 PM	WSW	1.1
31 Aug 2024	7:00 PM	NW	1.4
31 Aug 2024	8:00 PM	W	1.0
31 Aug 2024	9:00 PM	SSW	0.6
31 Aug 2024	10:00 PM	S	0.7
31 Aug 2024	11:00 PM	S	0.6

**APPENDIX D
ENVIRONMENTAL MONITORING
SCHEDULES**

Contract No. ED/2018/04
Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron
Impact Air and Noise Monitoring Schedule (August 2024)

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
				1-Aug	2-Aug	3-Aug
				24-hrs TSP	1-hr TSP X3 Noise	
4-Aug	5-Aug	6-Aug	7-Aug	8-Aug	9-Aug	10-Aug
			24-hrs TSP	1-hr TSP X3 Noise		
11-Aug	12-Aug	13-Aug	14-Aug	15-Aug	16-Aug	17-Aug
		24-hrs TSP	1-hr TSP X3 Noise			
18-Aug	19-Aug	20-Aug	21-Aug	22-Aug	23-Aug	24-Aug
	24-hrs TSP	1-hr TSP X3 Noise				24-hrs TSP
25-Aug	26-Aug	27-Aug	28-Aug	29-Aug	30-Aug	31-Aug
	1-hr TSP X3 Noise			24-hrs TSP	1-hr TSP X3	

Air Quality Monitoring Station

1-hr TSP / 24-hrs TSP

AM1 - Tin Hau Temple

AM2 - Sai Tso Wan Recreation Ground

AM3 - Yau Lai Estate Bik Lai House

AM4⁽¹⁾ - Sitting-out Area at Cha Kwo Ling Village

AM4(B)₍₂₎ - Flat 103 Cha Kwo Ling Village

Noise Monitoring Station

CM1 - Nga Lai House, Yau Lai Estate Phase 1, Yau Tong

CM2 - Bik Lai House, Yau Lai Estate Phase 1, Yau Tong

CM3 - Block S, Yau Lai Estate Phase 5, Yau Tong

CM4 - Tin Hau Temple, Cha Kwo Ling

CM5 - CCC Kei Faat Primary School, Yau Tong

Notes: (1) For 1-hour TSP monitoring; (2) For 24-hours TSP monitoring;

Contract No. ED/2018/04
Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron
Tentative Impact Air and Noise Monitoring Schedule (September 2024)

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
1-Sep	2-Sep	3-Sep	4-Sep	5-Sep	6-Sep	7-Sep
			24-hrs TSP	1-hr TSP X3 Noise		
8-Sep	9-Sep	10-Sep	11-Sep	12-Sep	13-Sep	14-Sep
		24-hrs TSP	1-hr TSP X3 Noise			
15-Sep	16-Sep	17-Sep	18-Sep	19-Sep	20-Sep	21-Sep
	24-hrs TSP	1-hr TSP X3 Noise				24-hrs TSP
22-Sep	23-Sep	24-Sep	25-Sep	26-Sep	27-Sep	28-Sep
	1-hr TSP X3 Noise				24-hrs TSP	1-hr TSP X3
29-Sep	30-Sep					

The schedule may be changed due to unforeseen circumstances (adverse weather, safety concerns, etc.)

Air Quality Monitoring Station

1-hr TSP / 24-hrs TSP

- AM1 - Tin Hau Temple
- AM2 - Sai Tso Wan Recreation Ground
- AM3 - Yau Lai Estate Bik Lai House
- AM4⁽¹⁾ - Sitting-out Area at Cha Kwo Ling Village
- AM4(B)₍₂₎ - Flat 103 Cha Kwo Ling Village

Noise Monitoring Station

- CM1 - Nga Lai House, Yau Lai Estate Phase 1, Yau Tong
- CM2 - Bik Lai House, Yau Lai Estate Phase 1, Yau Tong
- CM3 - Block S, Yau Lai Estate Phase 5, Yau Tong
- CM4 - Tin Hau Temple, Cha Kwo Ling
- CM5 - CCC Kei Faat Primary School, Yau Tong

Notes: (1) For 1-hour TSP monitoring; (2) For 24-hours TSP monitoring;

Contract No. ED/2018/04
Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron
Tentative Impact Air and Noise Monitoring Schedule (October 2024)

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
		1-Oct	2-Oct	3-Oct	4-Oct	5-Oct
				24-hrs TSP	1-hr TSP X3 Noise	
6-Oct	7-Oct	8-Oct	9-Oct	10-Oct	11-Oct	12-Oct
			24-hrs TSP	1-hr TSP X3 Noise		
13-Oct	14-Oct	15-Oct	16-Oct	17-Oct	18-Oct	19-Oct
		24-hrs TSP	1-hr TSP X3 Noise			
20-Oct	21-Oct	22-Oct	23-Oct	24-Oct	25-Oct	26-Oct
	24-hrs TSP	1-hr TSP X3 Noise				24-hrs TSP
27-Oct	28-Oct	29-Oct	30-Oct	31-Oct		
	1-hr TSP X3 Noise					

The schedule may be changed due to unforeseen circumstances (adverse weather, safety concerns, etc.)

Air Quality Monitoring Station

1-hr TSP / 24-hrs TSP

AM1 - Tin Hau Temple

AM2 - Sai Tso Wan Recreation Ground

AM3 - Yau Lai Estate Bik Lai House

AM4⁽¹⁾ - Sitting-out Area at Cha Kwo Ling Village

AM4(B)₍₂₎ - Flat 103 Cha Kwo Ling Village

Noise Monitoring Station

CM1 - Nga Lai House, Yau Lai Estate Phase 1, Yau Tong

CM2 - Bik Lai House, Yau Lai Estate Phase 1, Yau Tong

CM3 - Block S, Yau Lai Estate Phase 5, Yau Tong

CM4 - Tin Hau Temple, Cha Kwo Ling

CM5 - CCC Kei Faat Primary School, Yau Tong

Notes: (1) For 1-hour TSP monitoring; (2) For 24-hours TSP monitoring;

Contract No. ED/2018/04
Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron
Tentative Impact Air and Noise Monitoring Schedule (November 2024)

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
					1-Nov	2-Nov
					24-hrs TSP	1-hr TSP X3
3-Nov	4-Nov	5-Nov	6-Nov	7-Nov	8-Nov	9-Nov
				24-hrs TSP	1-hr TSP X3 Noise	
10-Nov	11-Nov	12-Nov	13-Nov	14-Nov	15-Nov	16-Nov
			24-hrs TSP	1-hr TSP X3 Noise		
17-Nov	18-Nov	19-Nov	20-Nov	21-Nov	22-Nov	23-Nov
		24-hrs TSP	1-hr TSP X3 Noise			
24-Nov	25-Nov	26-Nov	27-Nov	28-Nov	29-Nov	30-Nov
	24-hrs TSP	1-hr TSP X3 Noise				24-hrs TSP

The schedule may be changed due to unforeseen circumstances (adverse weather, safety concerns, etc.)

Air Quality Monitoring Station

1-hr TSP / 24-hrs TSP

- AM1 - Tin Hau Temple
- AM2 - Sai Tso Wan Recreation Ground
- AM3 - Yau Lai Estate Bik Lai House
- AM4⁽¹⁾ - Sitting-out Area at Cha Kwo Ling Village
- AM4(B)₍₂₎ - Flat 103 Cha Kwo Ling Village

Noise Monitoring Station

- CM1 - Nga Lai House, Yau Lai Estate Phase 1, Yau Tong
- CM2 - Bik Lai House, Yau Lai Estate Phase 1, Yau Tong
- CM3 - Block S, Yau Lai Estate Phase 5, Yau Tong
- CM4 - Tin Hau Temple, Cha Kwo Ling
- CM5 - CCC Kei Faat Primary School, Yau Tong

Notes: (1) For 1-hour TSP monitoring; (2) For 24-hours TSP monitoring;

APPENDIX E
1-HOUR TSP MONITORING RESULTS
AND GRAPHICAL PRESENTATIONS

Appendix E - 1-hour TSP Monitoring Results

Location AM1 - Tin Hau Temple			
Date	Time	Weather	Particulate Concentration ($\mu\text{g}/\text{m}^3$)
2-Aug-24	11:53	Sunny	44.8
2-Aug-24	12:53	Sunny	22.4
2-Aug-24	13:53	Sunny	36.8
8-Aug-24	9:00	Sunny	153.6
8-Aug-24	10:00	Sunny	92.8
8-Aug-24	11:00	Sunny	16.0
14-Aug-24	9:45	Fine	32.3
14-Aug-24	10:45	Fine	30.4
14-Aug-24	11:45	Fine	30.4
20-Aug-24	9:50	Fine	60.8
20-Aug-24	10:50	Fine	47.5
20-Aug-24	11:50	Fine	41.8
26-Aug-24	11:15	Fine	51.3
26-Aug-24	12:15	Fine	36.1
26-Aug-24	13:15	Fine	24.7
30-Aug-24	9:30	Fine	84.6
30-Aug-24	10:30	Fine	91.8
30-Aug-24	11:30	Fine	104.4
Average			55.7
Maximum			153.6
Minimum			16.0




Location AM2 - Sai Tso Wan Recreation Ground			
Date	Time	Weather	<i>Particulate Concentration ($\mu\text{g}/\text{m}^3$)</i>
2-Aug-24	14:00	Cloudy	20.9
2-Aug-24	15:00	Cloudy	19.0
2-Aug-24	16:00	Cloudy	47.5
8-Aug-24	16:00	Sunny	27.0
8-Aug-24	17:00	Sunny	32.4
8-Aug-24	18:00	Sunny	30.6
14-Aug-24	9:00	Sunny	24.0
14-Aug-24	10:00	Sunny	12.8
14-Aug-24	11:00	Sunny	12.8
20-Aug-24	9:00	Sunny	32.4
20-Aug-24	10:00	Sunny	34.2
20-Aug-24	11:00	Sunny	28.8
26-Aug-24	9:00	Sunny	14.4
26-Aug-24	10:00	Sunny	12.8
26-Aug-24	11:00	Sunny	8.0
30-Aug-24	14:00	Sunny	86.4
30-Aug-24	15:00	Sunny	73.8
30-Aug-24	16:00	Sunny	79.2
Average			33.2
Maximum			86.4
Minimum			8.0

Appendix E - 1-hour TSP Monitoring Results

Location AM3 - Yau Lai Estate Bik Lai House			
Date	Time	Weather	<i>Particulate Concentration ($\mu\text{g}/\text{m}^3$)</i>
2-Aug-24	14:08	Sunny	27.2
2-Aug-24	15:08	Sunny	27.2
2-Aug-24	16:08	Sunny	24.0
8-Aug-24	11:08	Sunny	19.2
8-Aug-24	12:08	Sunny	25.6
8-Aug-24	13:08	Sunny	17.6
14-Aug-24	11:45	Fine	19.0
14-Aug-24	12:45	Fine	19.0
14-Aug-24	13:45	Fine	20.9
20-Aug-24	11:50	Fine	34.2
20-Aug-24	12:50	Fine	30.4
20-Aug-24	13:50	Fine	20.9
26-Aug-24	13:20	Fine	19.0
26-Aug-24	14:20	Fine	20.9
26-Aug-24	15:20	Fine	22.8
30-Aug-24	12:05	Sunny	70.2
30-Aug-24	13:05	Sunny	84.6
30-Aug-24	14:05	Sunny	75.6
		Average	32.1
		Maximum	84.6
		Minimum	17.6


Location AM4 - Sitting-out Area at Cha Kwo Ling Village			
Date	Time	Weather	<i>Particulate Concentration ($\mu\text{g}/\text{m}^3$)</i>
2-Aug-24	15:35	Sunny	32.0
2-Aug-24	16:35	Sunny	32.0
2-Aug-24	17:35	Sunny	22.4
8-Aug-24	13:50	Sunny	19.2
8-Aug-24	14:50	Sunny	19.2
8-Aug-24	15:50	Sunny	17.6
14-Aug-24	9:00	Fine	36.0
14-Aug-24	10:00	Fine	27.0
14-Aug-24	11:00	Fine	16.2
20-Aug-24	9:00	Fine	18.0
20-Aug-24	10:00	Fine	10.8
20-Aug-24	11:00	Fine	23.4
26-Aug-24	9:00	Sunny	32.3
26-Aug-24	10:00	Sunny	49.4
26-Aug-24	11:00	Sunny	55.1
30-Aug-24	15:45	Sunny	91.8
30-Aug-24	16:45	Sunny	99.0
30-Aug-24	17:45	Sunny	86.4
		Average	38.2
		Maximum	99.0
		Minimum	10.8

1-hr TSP Concentration Levels

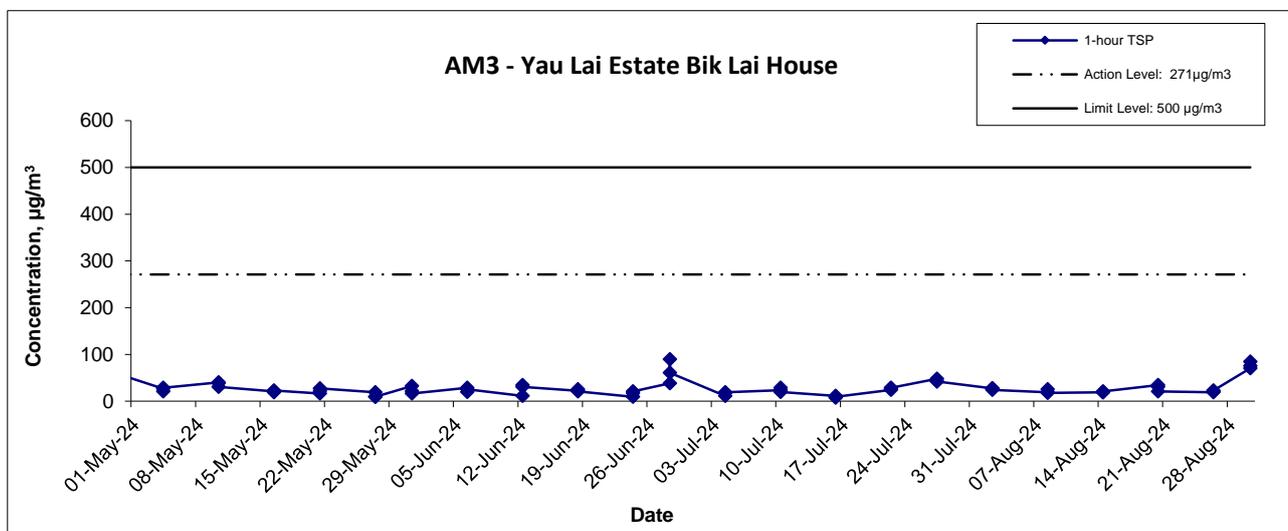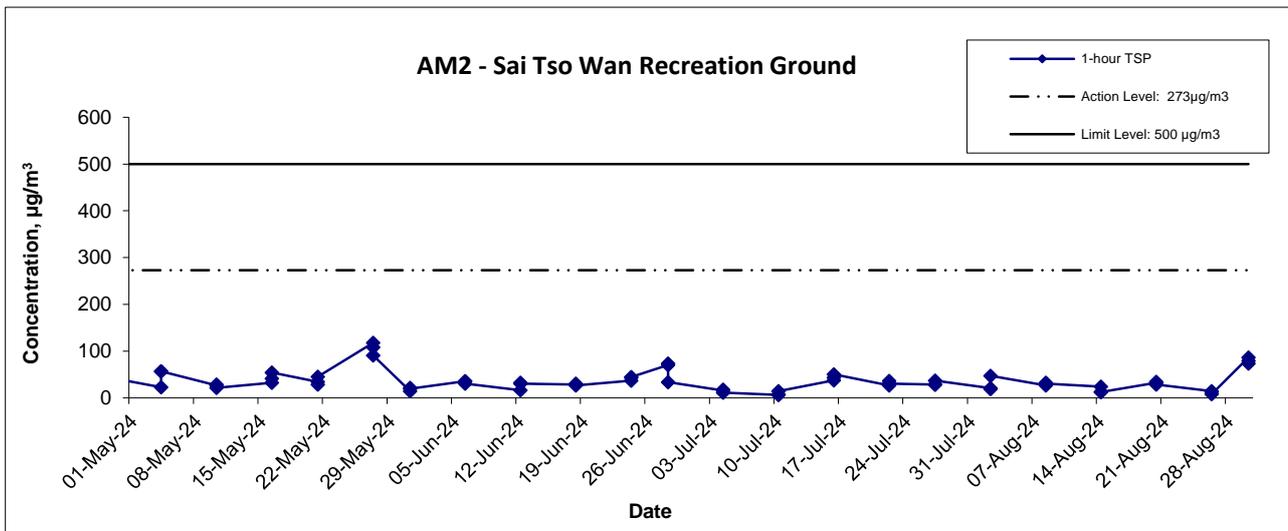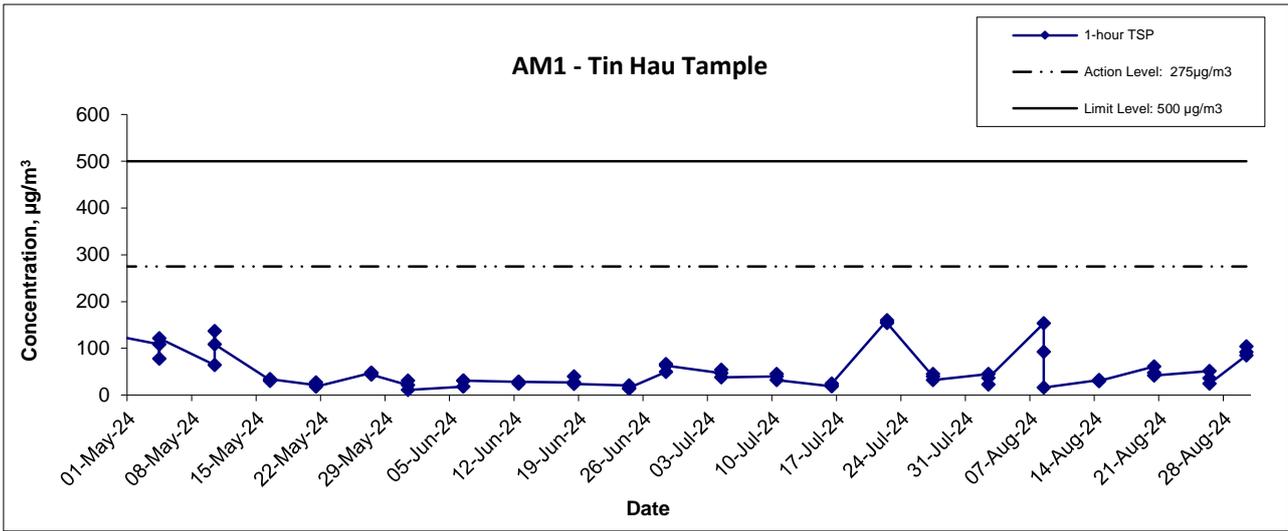

Contract No. ED/2018/04 Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron Graphical Presentation of 1-hour TSP Monitoring Results	Scale	Project No.	
	Date	Appendix	
	N.T.S	MA20003	E

1-hr TSP Concentration Levels

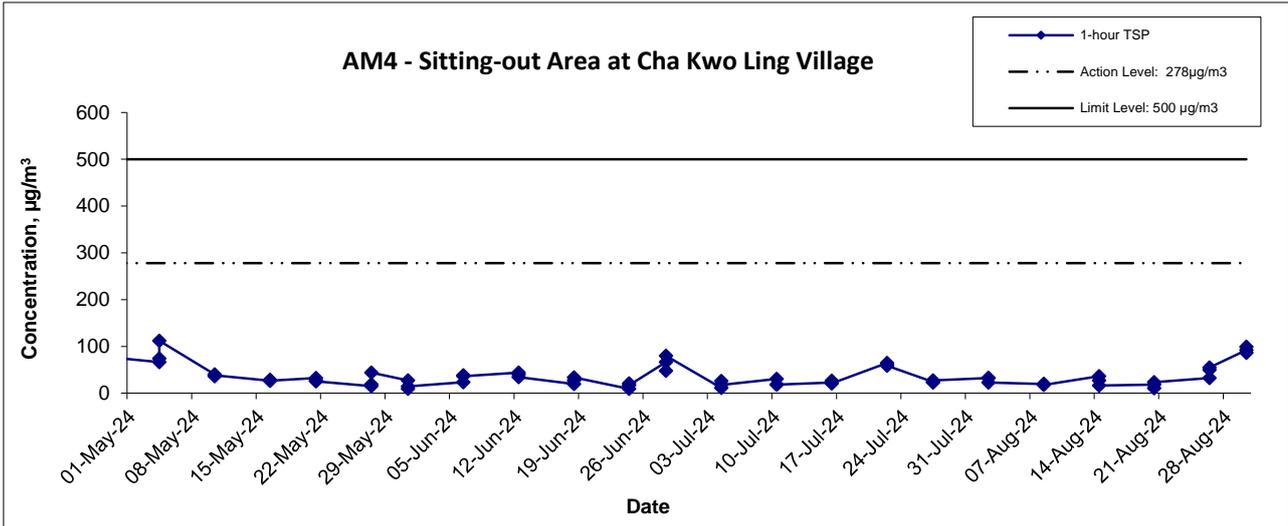

Notes:

1. The major activitie(s) being carried out on site during the reporting period is/are presented in Section 1.10
2. The weather conditions during the reporting month are presented in Appendix C.
3. Other factors which might affect the monitoring results are presented in Section 2.18.

Contract No. ED/2018/04 Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron Graphical Presentation of 1-hour TSP Monitoring Results	Scale N.T.S	Project No. MA20003	CINOTECH
	Date Aug-24	Appendix E	

**APPENDIX F
24-HOUR TSP MONITORING RESULTS
AND GRAPHICAL PRESENTATIONS**

Appendix F - 24-hour TSP Monitoring Results

Location AM1 - Tin Hau Temple

Start Date	Weather	Filter Weight (g)		Particulate	Elapse Time		Sampling	Flow Rate (m ³ /min.)		Av. flow	Total vol.	Conc.
	Condition	Initial	Final	Weight (g)	Initial	Final	Time(hrs.)	Initial	Final	(m ³ /min)	(m ³)	(µg/m ³)
1-Aug-24	Sunny	3.3307	3.3587	0.0280	13722.6	13746.6	24.0	1.22	1.22	1.22	1755.5	15.9
7-Aug-24	Sunny	3.3475	3.4090	0.0615	13746.6	13770.6	24.0	1.22	1.22	1.22	1752.8	35.1
13-Aug-24	Sunny	3.3392	3.4144	0.0752	13770.6	13794.6	24.0	1.22	1.22	1.22	1755.5	42.8
19-Aug-24	Sunny	3.3464	3.3870	0.0406	13794.6	13818.6	24.0	1.22	1.22	1.22	1757.2	23.1
24-Aug-24	Fine	3.3246	3.3591	0.0345	13818.6	13842.6	24.0	1.22	1.22	1.22	1753.9	19.7
29-Aug-24	Fine	3.3455	3.4166	0.0711	13842.6	13866.6	24.0	1.22	1.22	1.22	1751.3	40.6
											Min	15.9
											Max	42.8
											Average	29.5

Location AM2 - Sai Tso Wan Recreation Ground




Start Date	Weather	Filter Weight (g)		Particulate	Elapse Time		Sampling	Flow Rate (m ³ /min.)		Av. flow	Total vol.	Conc.
	Condition	Initial	Final	Weight (g)	Initial	Final	Time(hrs.)	Initial	Final	(m ³ /min)	(m ³)	(µg/m ³)
1-Aug-24	Fine	3.3318	3.3842	0.0524	34839.4	34863.4	24.0	1.22	1.22	1.22	1756.1	29.8
7-Aug-24	Sunny	3.3476	3.3912	0.0436	34863.4	34887.4	24.0	1.22	1.22	1.22	1753.3	24.9
13-Aug-24	Sunny	3.3015	3.3420	0.0405	34887.4	34911.4	24.0	1.22	1.22	1.22	1756.0	23.1
19-Aug-24	Fine	3.3452	3.3812	0.0360	34911.4	34935.4	24.0	1.22	1.22	1.22	1754.4	20.5
24-Aug-24	Sunny	3.3299	3.3882	0.0584	34935.4	34959.4	24.0	1.22	1.22	1.22	1751.0	33.3
29-Aug-24	Sunny	3.3366	3.3793	0.0427	34959.4	34983.4	24.0	1.21	1.21	1.21	1748.3	24.4
											Min	20.5
											Max	33.3
											Average	26.0

Location AM3 - Yau Lai Estate, Bik Lai House

Start Date	Weather	Filter Weight (g)		Particulate	Elapse Time		Sampling	Flow Rate (m ³ /min.)		Av. flow	Total vol.	Conc.
	Condition	Initial	Final	Weight (g)	Initial	Final	Time(hrs.)	Initial	Final	(m ³ /min)	(m ³)	(µg/m ³)
1-Aug-24	Sunny	3.3325	3.3482	0.0158	9094.1	9118.1	24.0	1.22	1.22	1.22	1753.9	9.0
7-Aug-24	Sunny	3.3490	3.3841	0.0351	9118.1	9142.1	24.0	1.22	1.22	1.22	1751.0	20.0
13-Aug-24	Fine	3.3291	3.3542	0.0251	9142.1	9166.1	24.0	1.22	1.22	1.22	1753.9	14.3
19-Aug-24	Fine	3.3619	3.3794	0.0175	9166.1	9190.1	24.0	1.22	1.22	1.22	1754.5	10.0
24-Aug-24	Fine	3.3128	3.3399	0.0271	9190.1	9214.1	24.0	1.22	1.22	1.22	1750.7	15.5
29-Aug-24	Sunny	3.3629	3.3987	0.0357	9214.1	9238.1	24.0	1.21	1.21	1.21	1747.8	20.5
											Min	9.0
											Max	20.5
											Average	14.9


Location AM4(B) - Flat 103 Cha Kwo Ling Village

Start Date	Weather	Filter Weight (g)		Particulate	Elapse Time		Sampling	Flow Rate (m ³ /min.)		Av. flow	Total vol.	Conc.
	Condition	Initial	Final	Weight (g)	Initial	Final	Time(hrs.)	Initial	Final	(m ³ /min)	(m ³)	(µg/m ³)
1-Aug-24	Sunny	3.3652	3.5858	0.2206	20543.7	20567.7	24.0	1.22	1.22	1.22	1751.4	126.0
7-Aug-24	Sunny	3.3872	3.6150	0.2279	20567.7	20591.7	24.0	1.21	1.21	1.21	1748.7	130.3
13-Aug-24	Rainy	3.3401	3.4929	0.1528	20615.7	20639.7	24.0	1.22	1.22	1.22	1751.3	87.2
19-Aug-24	Fine	3.3462	3.4771	0.1309	20639.8	20663.8	24.0	1.22	1.22	1.22	1754.9	74.6
24-Aug-24	Fine	3.3222	3.5821	0.2599	20663.8	20687.8	24.0	1.22	1.22	1.22	1751.5	148.4
29-Aug-24	Fine	3.3377	3.5200	0.1823	20687.8	20711.8	24.0	1.21	1.22	1.21	1748.8	104.2
											Min	74.6
											Max	148.4
											Average	111.8

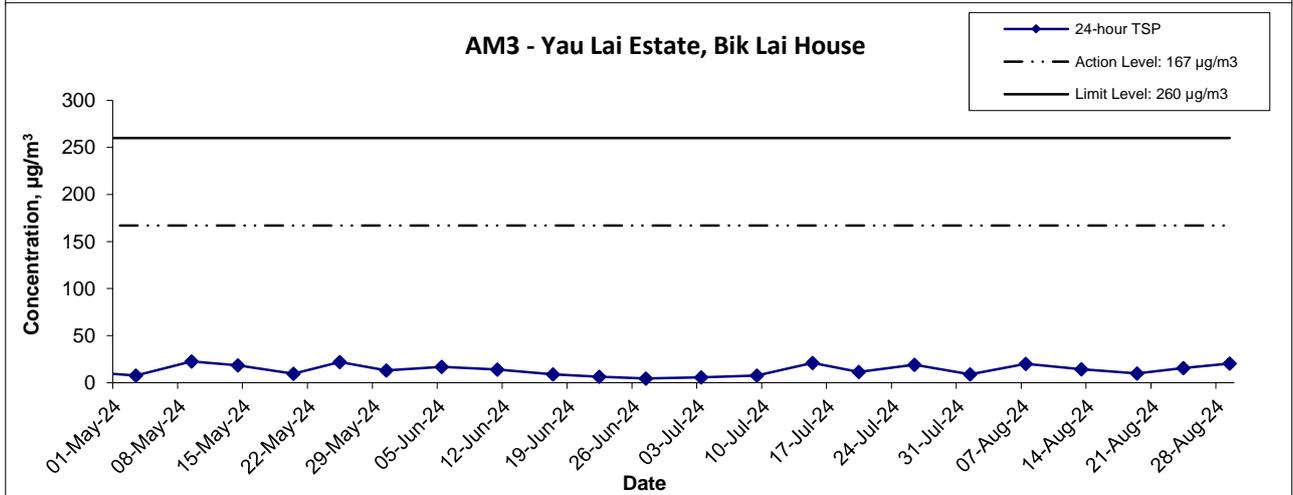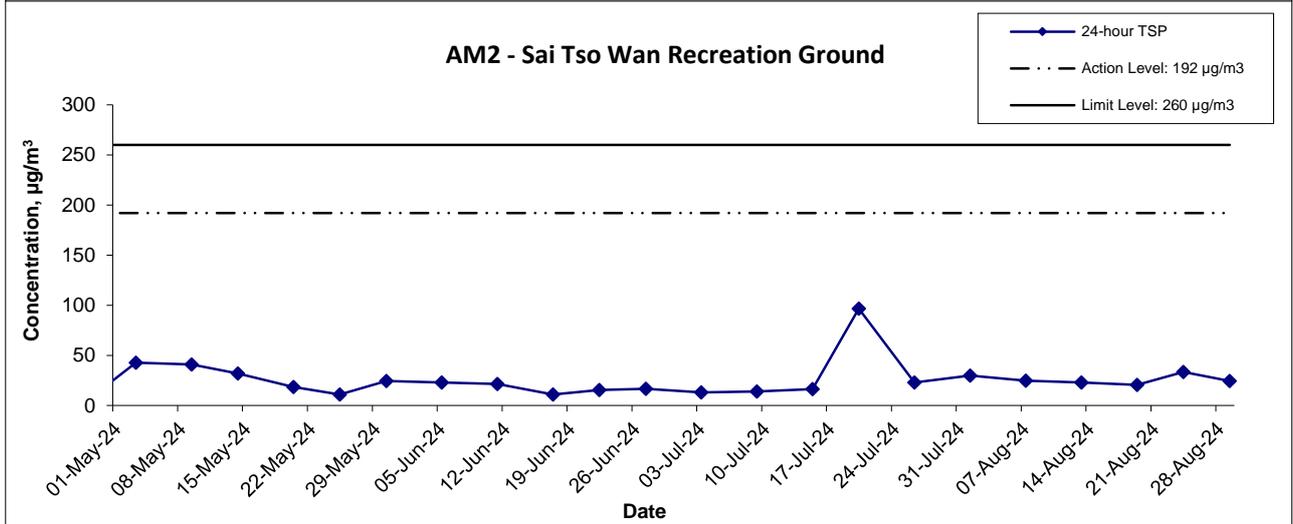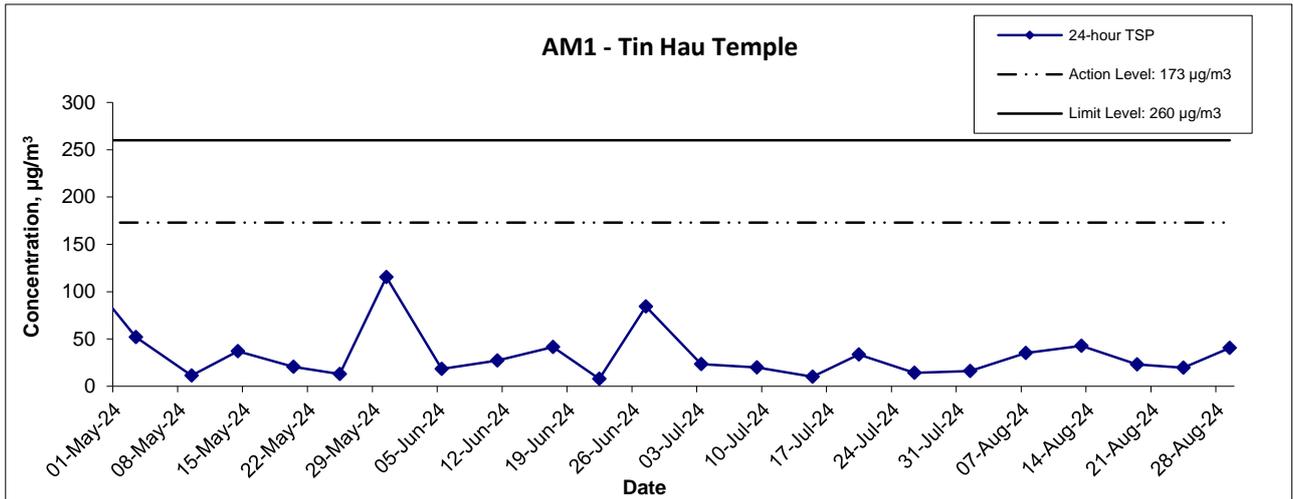

Contract No. ED/2018/04 Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron	Scale N.T.S	Project No. MA20003	CINOTECH
Graphical Presentation of 24-hour TSP Monitoring Results	Date Aug-24	Appendix F	

24-hr TSP Concentration Levels

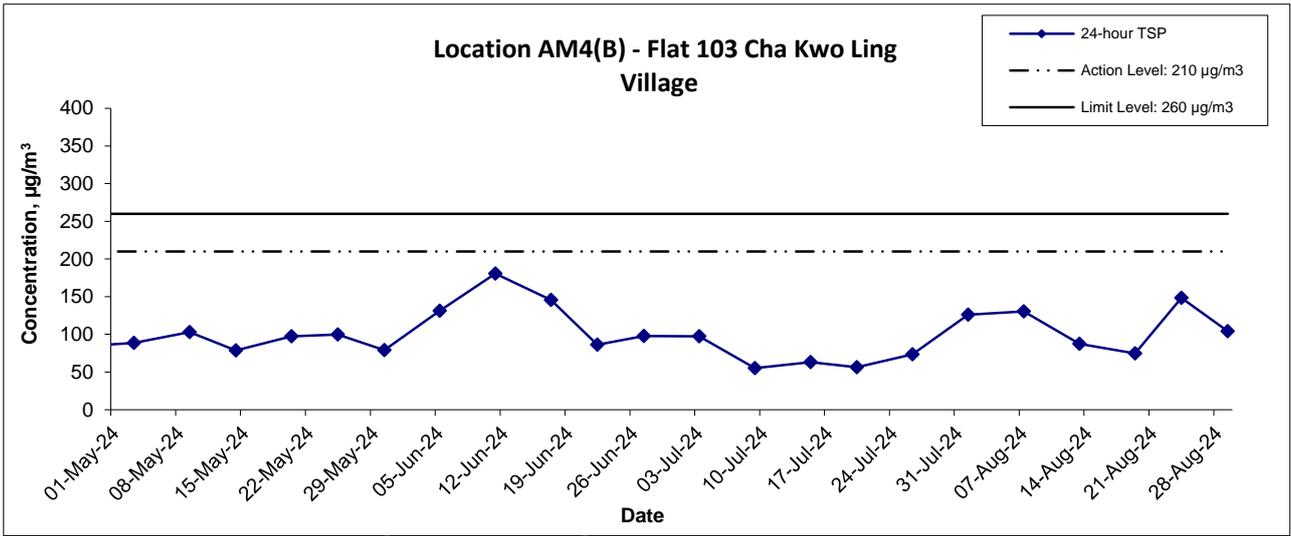

Notes:

- 1) The major activitie(s) being carried out on site during the reporting period is/are presented in Section 1.10
- 2) The weather conditions during the reporting month are presented in Appendix C.
- 3) Other factors which might affect the monitoring results are presented in Section 2.18.

Contract No. ED/2018/04 Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron Graphical Presentation of 24-hour TSP Monitoring Results	Scale N.T.S	Project No. MA20003	
	Date Aug-24	Appendix F	

**APPENDIX G
NOISE MONITORING RESULTS AND
GRAPHICAL PRESENTATIONS**

Appendix G - Noise Monitoring Results

(0700-1900 hrs on Normal Weekdays)

Location CM1 - Nga Lai House, Yau Lai Estate Phase 1, Yau Tong							
Date	Time	Weather	Unit: dB (A) (30-min)				
			Measured Noise Level			Baseline Level	Construction Noise Level
			L _{eq}	L ₁₀	L ₉₀	L _{eq}	L _{eq}
2 Aug 2024	15:58	Sunny	70.1	73.0	65.1	65.5	68
8 Aug 2024	14:28	Sunny	68.5	70.0	66.6	65.5	65
14 Aug 2024	13:50	Fine	67.3	68.5	65.5	65.5	63
20 Aug 2024	14:20	Fine	67.8	69.0	66.3	65.5	64
26 Aug 2024	12:50	Fine	61.7	62.8	59.5	65.5	62 Measured ≤ Baseline




Location CM2 - Bik Lai House, Yau Lai Estate Phase 1, Yau Tong							
Date	Time	Weather	Unit: dB (A) (30-min)				
			Measured Noise Level			Baseline Level	Construction Noise Level
			L _{eq}	L ₁₀	L ₉₀	L _{eq}	L _{eq}
2 Aug 2024	15:21	Sunny	71.2	73.4	68.5	63.6	70
8 Aug 2024	13:49	Sunny	68.6	69.6	67.1	63.6	67
14 Aug 2024	12:25	Fine	65.4	66.5	63.9	63.6	61
20 Aug 2024	13:40	Fine	66.8	68.0	65.7	63.6	64
26 Aug 2024	13:25	Fine	62.4	64.1	60.4	63.6	62 Measured ≤ Baseline

Location CM3 - Block S, Yau Lai Estate Phase 5, Yau Tong							
Date	Time	Weather	Unit: dB (A) (30-min)				
			Measured Noise Level			Baseline Level	Construction Noise Level
			L _{eq}	L ₁₀	L ₉₀	L _{eq}	L _{eq}
2 Aug 2024	14:32	Sunny	67.5	68.8	66.2	65.6	63
8 Aug 2024	15:09	Sunny	66.1	67.4	64.8	65.6	56
14 Aug 2024	14:35	Fine	64.9	65.9	63.7	65.6	65 Measured ≤ Baseline
20 Aug 2024	12:15	Fine	61.2	63.8	54.2	65.6	61 Measured ≤ Baseline
26 Aug 2024	14:50	Fine	60.4	61.7	59.0	65.6	60 Measured ≤ Baseline

Location CM4 - Tin Hau Temple, Cha Kwo Ling							
Date	Time	Weather	Unit: dB (A) (30-min)				
			Measured Noise Level			Baseline Level	Construction Noise Level
			L _{eq}	L ₁₀	L ₉₀	L _{eq}	L _{eq}
2 Aug 2024	12:55	Sunny	59.9	62.5	53.8	62.0	60 Measured ≤ Baseline
8 Aug 2024	10:27	Sunny	56.6	59.3	51.4	62.0	57 Measured ≤ Baseline
14 Aug 2024	10:00	Fine	60.2	62.8	59.4	62.0	60 Measured ≤ Baseline
20 Aug 2024	10:10	Fine	58.4	59.6	53.5	62.0	58 Measured ≤ Baseline
26 Aug 2024	11:10	Fine	64.1	65.7	58.0	62.0	60



Location CM5 - CCC Kei Faat Primary School, Yau Tong							
Date	Time	Weather	Unit: dB (A) (30-min)				
			Measured Noise Level			Baseline Level	Construction Noise Level
			L _{eq}	L ₁₀	L ₉₀	L _{eq}	L _{eq}
2 Aug 2024	13:49	Sunny	68.5	70.8	64.5	68.2	57
8 Aug 2024	13:52	Sunny	66.1	68.9	61.9	68.2	66 Measured ≤ Baseline
14 Aug 2024	10:50	Fine	65.9	68.1	64.9	68.2	66 Measured ≤ Baseline
20 Aug 2024	11:00	Fine	67.1	68.9	64.0	68.2	67 Measured ≤ Baseline
26 Aug 2024	14:10	Fine	61.7	63.2	56.8	68.2	62 Measured ≤ Baseline

Noise Levels

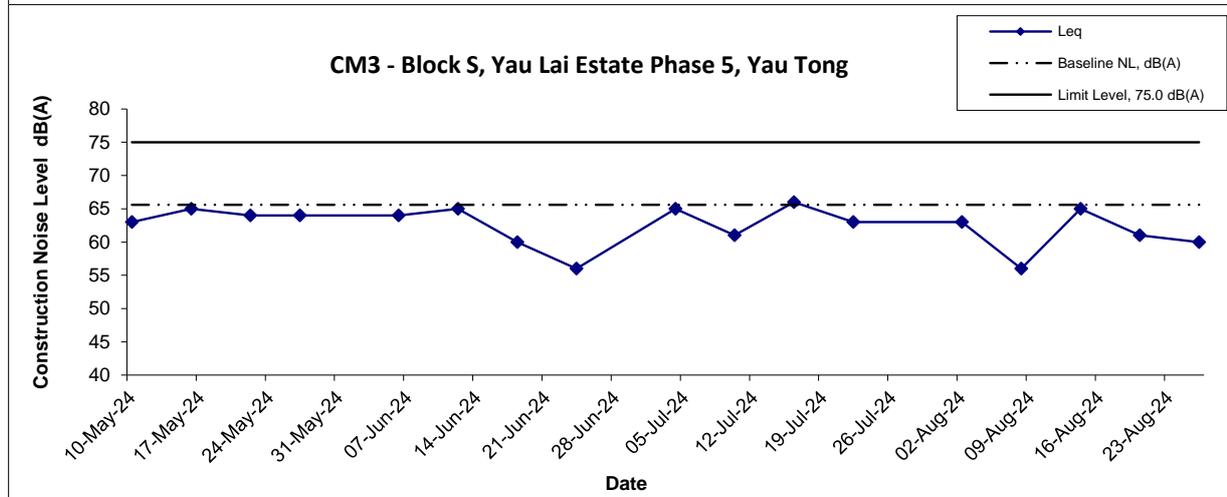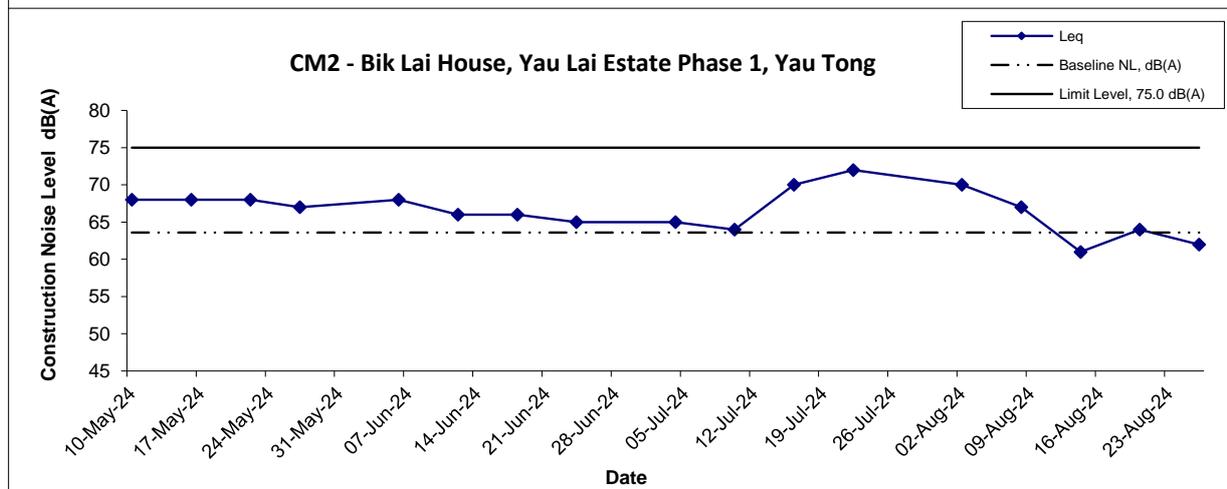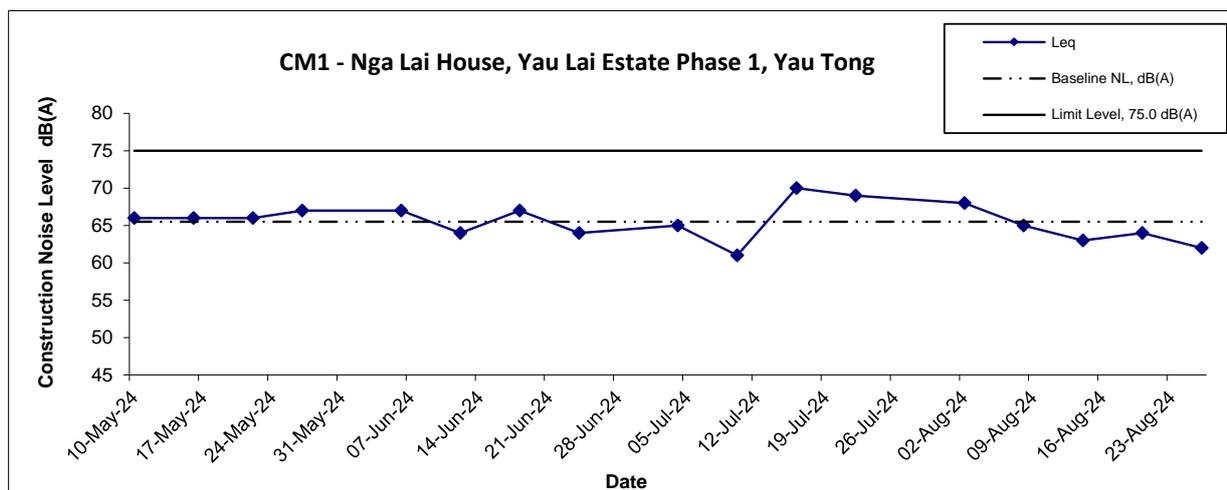

Title Contract No. ED/2018/04 Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron Graphical Presentation of Construction Noise Monitoring Results	Scale	Project	CINOTECH
	N.T.S	No. MA20003	
	Date	Appendix	
	Aug 24	G	

Noise Levels

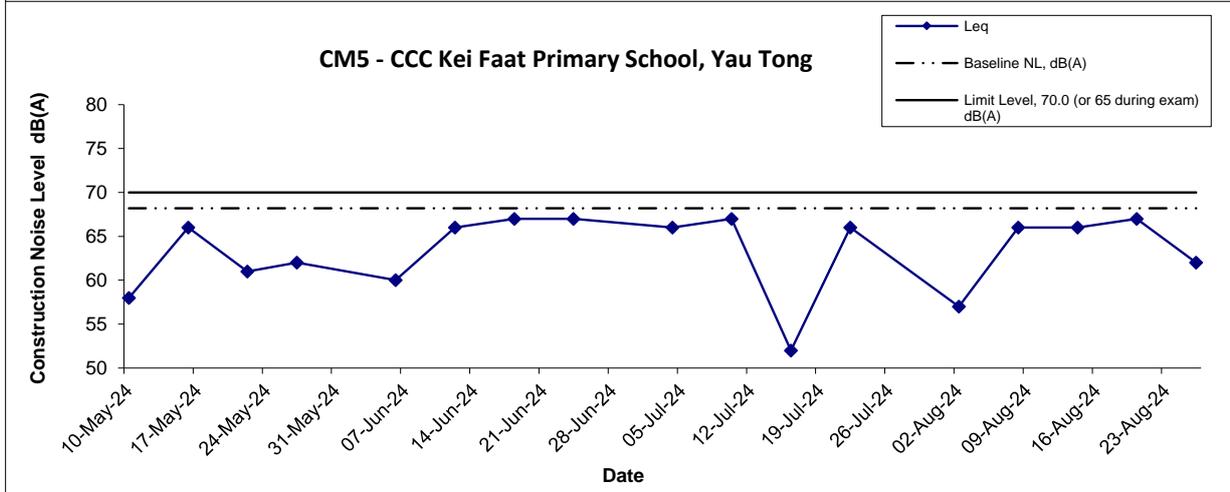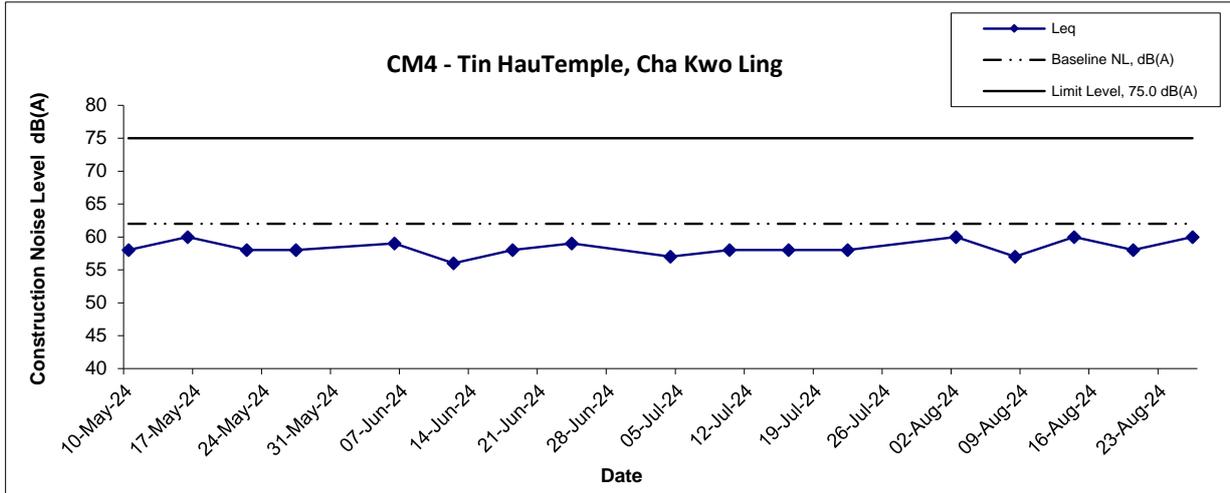

Notes:

- 1) The major activitie(s) being carried out on site during the reporting period is/are presented in Section 1.10
- 2) The weather conditions during the reporting month are presented in Appendix C.
- 3) Other factors which might affect the monitoring results are presented in Section 3.13.

Title Contract No. ED/2018/04 Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron Graphical Presentation of Construction Noise Monitoring Results	Scale	Project	CINOTECH
	N.T.S	No. MA20003	
	Date	Appendix	
	Aug 24	G	

**APPENDIX H
WASTE GENERATION IN THE
REPORTING MONTH**



Name of Department: CEDD

Monthly Summary Waste Flow Table for 2024 (CKL)

Month	Actual Quantities of Inert C&D Materials Generated Monthly						Actual Quantities of C&D Wastes Generated Monthly				
	a.Total Quantity Generated (a=c+d+e)	b. Hard Rock and Large Broken Concrete	c. Reused in the Contract	d. Reused in Other Projects	e. Disposed as Public Fill	f. Imported Fill	g. Metals	h. Paper / Cardboard Packaging	i. Plastics	j. Chemical Waste	k. Others, e.g. general refuse
	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000m ³)
January	2.027	0.187	0.000	0.000	2.027	0.000	0.000	0.000	0.000	19.000	0.054
February	5.666	0.197	0.000	0.000	5.666	0.000	0.000	0.000	0.000	0.000	0.039
March	4.705	0.198	0.000	0.000	4.705	0.000	0.000	0.000	0.000	0.000	0.032
April	8.647	0.560	0.000	0.000	8.647	0.000	0.000	0.000	0.000	0.000	0.050
May	14.492	0.121	0.086	0.000	14.406	0.000	0.000	0.000	0.000	0.000	0.039
June	8.403	0.805	1.963	0.000	6.441	0.000	0.000	0.000	0.000	0.000	0.048
Sub-total	43.941	2.067	2.049	0.000	41.892	0.000	0.000	0.000	0.000	19.000	0.262
July	11.767	2.123	3.088	0.000	8.680	0.000	0.000	0.000	0.000	0.000	0.068
August	12.028	2.919	0.000	0.000	12.028	0.000	0.000	0.000	0.000	0.000	0.056
September											
October											
November											
December											
Total	67.736	7.108	5.136	0.000	62.599	0.000	0.000	0.000	0.000	19.000	0.387

Monthly Summary Waste Flow Table

Notes:

- (1)The performance targets are given in ER Appendix 8I Clause 14 and the EM&A Manual(s).
- (2)The waste flow table shall also include C&D materials to be imported for use at the Site.
- (3)Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material.
- (4)The Contractor shall also submit the latest forecast of the total amount of C&D materials expected to be generated from the Works, together with a breakdown of the nature where the total amount of C&D materials expected to be generated from the Works is equal to or exceeding 50,000 m3. (ER Part 8 Clause 8.8.5 (d) (ii) refers).

Monthly Summary Waste Flow Table For 2024 (CKL)

Month	Actual Quantities of Inert C&D Materials Generated Monthly						Actual Quantities of C&D Waste Generated Monthly							
	Total Quantity Generated	Broken Concrete (see Note 4)	Estimated Quantities (Broken Concrete)	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Metals	Estimated Quantities (Metals)	Paper/ cardboard packaging	Estimated Quantities (Paper/ cardboard packaging)	Plastics (see Note 3)	Estimated Quantities (Plastics)	Chemical Waste	Others, e.g. general refuse
	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(tonne)
Jan-24	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Feb-24	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Mar-24	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Apr-24	0	0	0	0	0	0	0	0	0	0	0	0	0	0
May-24	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Jun-24	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Sub-total	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Jul-24	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Aug-24	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Sep-24														
Oct-24														
Nov-24														
Dec-24														
Total	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Notes:

- (1) The performance targets are given in PS Sub-clause 2(5) (c).
- (2) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.
- (3) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material.
- (4) Broken concrete for recycling into aggregates.

**APPENDIX I
SITE AUDIT SUMMARY**

Weekly Site Inspection Record Summary

Inspection Information

Checklist Reference Number	240801
Date	01 August 2024 (Thursday)
Time	09:30 – 16:30

Ref. No.	Non-Compliance	Related Item No.
-	None identified	-

Ref. No.	Remarks/Observations	Related Item No.
240801-EP458-R2	<p>B. Water Quality</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. 	C20
	<p>C. Air Quality</p> <ul style="list-style-type: none"> More than 20 bags of cement should be covered by impervious material cover at EVB LG1/F. 	
240801-EP458-R1	<p>D. Construction Noise Impact</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. 	E9
	<p>E. Waste/Chemical Management</p> <ul style="list-style-type: none"> Drip tray should be provided to oil/chemical containers to prevent leakage at EVB Roof Floor. 	
	<p>F. Visual and Landscape</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. 	
	<p>G. Permits/Licences</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. 	
	<p>H. Marine Ecology</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. 	
	<p>I. Others</p> <ul style="list-style-type: none"> Follow up on the previous session (Ref No.:240725), all the items have been rectified. 	

	Name	Signature	Date
Recorded by	Eric Hung		01 August 2024
Checked by	Karina Chan		02 August 2024

Weekly Site Inspection Record Summary
Inspection Information

Checklist Reference Number	240808
Date	08 August 2024 (Thursday)
Time	09:30 – 16:30

Ref. No.	Non-Compliance	Related Item No.
-	None identified	-

Ref. No.	Remarks/Observations	Related Item No.
240808-EP458-R2	<p>B. Water Quality</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. 	C20
	<p>C. Air Quality</p> <ul style="list-style-type: none"> More than 20 bags of cement should be covered by impervious cover at EVB LG1/F. 	
	<p>D. Construction Noise Impact</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. 	
240808-EP458-R1	<p>E. Waste/Chemical Management</p> <ul style="list-style-type: none"> Drip tray should be provided to chemical/oil containers to prevent leakage at EVB Roof Floor. 	E9
	<p>F. Visual and Landscape</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. 	
	<p>G. Permits/Licences</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. 	
	<p>H. Marine Ecology</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. 	
	<p>I. Others</p> <ul style="list-style-type: none"> Follow up on the previous session (Ref No.:240801), all the items have been rectified. 	

	Name	Signature	Date
Recorded by	Eric Hung		08 August 2024
Checked by	Karina Chan		09 August 2024

Weekly Site Inspection Record Summary
Inspection Information

Checklist Reference Number	240815
Date	15 August 2024 (Thursday)
Time	09:30 – 16:30

Ref. No.	Non-Compliance	Related Item No.
-	None identified	-

Ref. No.	Remarks/Observations	Related Item No.
	<p>B. Water Quality</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>C. Air Quality</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>D. Construction Noise Impact</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>E. Waste/Chemical Management</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>F. Visual and Landscape</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>G. Permits/Licences</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>H. Marine Ecology</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>I. Others</p> <ul style="list-style-type: none"> Follow up on the previous session (Ref No.:240808), all the items have been rectified. 	

	Name	Signature	Date
Recorded by	Eric Hung		15 August 2024
Checked by	Karina Chan		16 August 2024

Weekly Site Inspection Record Summary
Inspection Information

Checklist Reference Number	240822
Date	22 August 2024 (Thursday)
Time	09:30 – 16:30

Ref. No.	Non-Compliance	Related Item No.
-	None identified	-

Ref. No.	Remarks/Observations	Related Item No.
240822-EP-458-R1	<p>B. Water Quality</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>C. Air Quality</p> <ul style="list-style-type: none"> More than 20 bags of cement should be covered by impervious sheeting. (EBV LG1/F) <p>D. Construction Noise Impact</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>E. Waste/Chemical Management</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>F. Visual and Landscape</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>G. Permits/Licences</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>H. Marine Ecology</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>I. Others</p> <ul style="list-style-type: none"> No environmental deficiency was identified in previous session (Ref No.: 240815). 	C20

	Name	Signature	Date
Recorded by	Eric Hung		22 August 2024
Checked by	Karina Chan		23 August 2024

Weekly Site Inspection Record Summary
Inspection Information

Checklist Reference Number	240829
Date	29 August 2024 (Thursday)
Time	09:30 – 16:30

Ref. No.	Non-Compliance	Related Item No.
-	None identified	-

Ref. No.	Remarks/Observations	Related Item No.
	<p>B. Water Quality</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>C. Air Quality</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>D. Construction Noise Impact</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>E. Waste/Chemical Management</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>F. Visual and Landscape</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>G. Permits/Licences</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>H. Marine Ecology</p> <ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. <p>I. Others</p> <ul style="list-style-type: none"> Follow up on the previous session (Ref No.:240822), all the items have been rectified. 	

	Name	Signature	Date
Recorded by	William Yeung		29 August 2024
Checked by	Karina Chan		30 August 2024

**APPENDIX J
ENVIRONMENTAL MITIGATION
IMPLEMENTATION SCHEDULE (EMIS)**

App J - ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE (EMIS)

✓ Observation/reminder was made during site audit but improved/rectified by the contractor in the next site audit

EIA Ref. / EP Submission	Recommended Mitigation Measures	Objectives of the recommended Measures & Main Concerns to address	Who to implement the measures?	Location of the measures	When to Implement the measures?	What requirements or standards for the measures to achieve?
Air Quality						
S3.8.1	Watering eight times a day on active works areas, exposed areas and paved haul roads	To minimize the dust impact	Contractor	All Active Work Sites	Construction phase	APCO
S3.8.1	Enclosing the unloading process at barging point by a 3-sided screen with top tipping hall / mixing area in Work Area A, provision of water spraying and flexible dust curtains	To minimize the dust impact	Contractor	Barging Points	Construction phase	APCO
S3.8.7	<p>Every stock of more than 20 bags of cement or dry pulverised fuel ash (PFA) should be covered entirely by impervious sheeting or placed in an area sheltered on the top and the 3 sides.</p> <ul style="list-style-type: none"> Use of frequent watering for particularly dusty construction areas and areas close to ASRs.. Side enclosure and covering of any aggregate or dusty material storage piles to reduce emissions. Where this is not practicable owing to frequent usage, watering shall be applied to aggregate fines. Open stockpiles shall be avoided or covered. Where possible, prevent placing dusty material storage piles near ASRs. Tarpaulin covering of all dusty vehicle loads transported to, from and between site locations. Establishment and use of vehicle wheel and body washing facilities at the exit points of the site. Provision of wind shield and dust extraction units or similar dust mitigation measures at the loading area of barging point, and use of water sprinklers at the loading area where dust generation is likely during the loading process of loose material, particularly in dry seasons/ periods. Provision of not less than 2.4m high hoarding from ground level along site boundary where adjoins a road, streets or other accessible to the public except for a site entrance or exit. Imposition of speed controls for vehicles on site haul roads. Where possible, routing of vehicles and positioning of construction plant should be at the maximum possible distance from ASRs Every stock of more than 20 bags of cement or dry pulverised fuel ash (PFA) should be covered entirely by impervious sheeting or placed in an area sheltered on the top and the 3 sides. Instigation of an environmental monitoring and auditing program to monitor the construction process in order to enforce controls and modify method of work if dusty conditions arise. <p>Stagnant water should be removed to avoid mosquitoes at EBV Basement.</p> <p>Stagnant water should be removed to avoid mosquitoes at EBV Basement.</p> <p>Stagnant water should be avoided.</p>	To minimize the dust impact	Contractor	All Construction Work Sites	Construction phase	APCO and Air Pollution Control (Construction Dust) Regulation
/	<p>Emission from Vehicles and Plants</p> <ul style="list-style-type: none"> All vehicles shall be shut down in intermittent use. Only well-maintained plant should be operated on-site and plant should be serviced regularly to avoid emission of black smoke. All diesel fuelled construction plant within the works areas shall be powered by ultra low sulphur diesel fuel (ULSD) 	Reduce air pollution emission from construction vehicles and plants	Contractor	All construction sites	Construction stage	APCO

EIA Ref. / EP Submission	Recommended Mitigation Measures	Objectives of the recommended Measures & Main Concerns to address	Who to implement the measures?	Location of the measures	When to Implement the measures?	What requirements or standards for the measures to achieve?
	Valid No-road Mobile Machinery (NRMM) labels should be provided to regulated machines	Reduce air pollution emission from construction vehicles and plants	--			APCO
Noise Mitigation Plan	Use of Temporary Noise Barriers (i.e Acoustic box, SilentUp and etc.) or Full Enclosure for PME according to the approved Noise Mitigation Plan	To minimize construction noise impact arising from the Project at the affected NSRs	Contractor	Work Sites	Construction phase	EIAO-TM, NCO
Rubbish were observed at Portion U.	Good Site Practice <ul style="list-style-type: none"> Only well-maintained plant should be operated on-site and plant should be serviced regularly during the construction program Silencers or mufflers on construction equipment should be utilized and should be properly maintained during the construction program. Mobile plant, if any, should be sited as far away from NSRs as possible. Machines and plant (such as trucks) that may be in intermittent use should be shut down between works periods or should be throttled down to a minimum. Plant known to emit noise strongly in one direction should, wherever possible, be orientated so that the noise is directed away from the nearby NSRs. Material stockpiles and other structures should be effectively utilized, wherever practicable, in screening noise from on-site construction activities. 	To minimize construction noise impact arising from the Project at the affected NSRs	Project Proponent	Work sites	Construction Period	EIAO-TM, NCO
S4.9	Scheduling of Construction Works during School Examination Period	To minimize construction noise impact arising from the Project at the affected NSRs	Contractor	Work site near school	Construction phase	EIAO-TM, NCO
Water Quality Impact (Construction Phase)						
S5.6.24	The dry density of filling material for the TKO-LT Tunnel reclamation should be 1,900kg/m ³ , with fine content of 25% or less	Control potential impacts from filling activities	CEDD's Contractors	Work site	Construction Phase	EIAO-TM, WPCO
S5.8.1	Non-dredged method by constructing steel cellular caisson structure with stone column shall be adopted for construction of seawall foundation. During the stone column installation (also including the installation of steel cellular caisson), silt curtain shall be employed around the active stone column installation points.	Control potential impacts from filling activities	CEDD's Contractors	Work site	Construction Phase	EIAO-TM, WPCO
S5.8.2	Formation of seawall enclosing the reclamation for Road P2 (notwithstanding an opening of about 50m for marine access) shall be completed prior to the filling activities. The seawall opening of about 50m wide for marine access shall be selected at a location as indicatively shown in Appendix 5.10. No more than 3 filling barge trips per day shall be made with a maximum daily rate of 3,000m ³ (i.e. 1,000 m ³ per trip) for the filling operation at the reclamation area for Road P2. All filling works shall be carried out behind the seawall with the use of single silt curtain at the marine access.	Control potential impacts from filling activities	CEDD's Contractors	Work site	Construction Phase	EIAO-TM, WPCO
Silt Curtain Deployment Plan	<ul style="list-style-type: none"> Silt curtains should be deployed properly to surround the works area. Maintenance of silt curtain should be provided. Sufficient stock of silt curtain should be provided on site. 	Control potential impacts from marine works	Contractor	NE/2015/01	Construction stage	EIAO

EIA Ref. / EP Submission	Recommended Mitigation Measures	Objectives of the recommended Measures & Main Concerns to address	Who to implement the measures?	Location of the measures	When to Implement the measures?	What requirements or standards for the measures to achieve?
S5.8.3	<p>Other good site practices should be undertaken during filling operations include:</p> <ul style="list-style-type: none"> all marine works should adopt the environmental friendly construction methods as far as practically possible including the use of cofferdams to cover the construction area to separate the construction works from the sea; floating single silt curtain shall be employed for all marine works; all vessels should be sized so that adequate clearance is maintained between vessels and the seabed in all tide conditions, to ensure that undue turbidity is not generated by turbulence from vessel movement or propeller wash; all hopper barges should be fitted with tight fitting seals to their bottom openings to prevent leakage of material; excess material shall be cleaned from the decks and exposed fittings of barges before the vessel is moved; adequate freeboard shall be maintained on barges to reduce the likelihood of decks being washed by wave action; loading of barges and hoppers should be controlled to prevent splashing of filling material into the surrounding water. Barges or hoppers should not be filled to a level that will cause the overflow of materials or polluted water during loading or transportation; any pipe leakages shall be repaired quickly. Plant should not be operated with leaking pipes; construction activities should not cause foam, oil, grease, scum, litter or other objectionable matter to be present on the water within the site or dumping grounds; and before commencement of the reclamation works, the holder of Environmental Permit has to submit plans showing the phased construction of the reclamation, design and operation of the silt curtain. 	Control potential impacts from filling activities and marine-based construction	CEDD's Contractors	Work site	Construction Phase	EIAO-TM, WPCO, Waste Disposal Ordinance (WDO)
S5.8.4	Site specific mitigation plan for reclamation areas using public fill materials should be submitted for EPD agreement before commencement of construction phase with due consideration of good site practices.	Control potential impacts from filling activities and marine based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
ERR S5.6.1	<p>To minimize water quality impact arising from the dredging and filling works for Reclamation for Road P2, the following mitigation measures shall be implemented:</p> <ul style="list-style-type: none"> Before carrying out any dredging and underwater filling works, a temporary barrier shall first be constructed to a height above the high water mark to completely enclose the works site (without any opening at the barrier wall) The temporary barrier fully enclosing the dredging and underwater filling works site shall not be removed before completion of all dredging and underwater filling works. Water quality sampling and testing shall be carried out to demonstrate that the water quality inside the enclosed barrier is comparable to the ambient or baseline levels prior to the removal of the fully enclosed barrier. Silt curtains shall be deployed for the installation and removal of the temporary barrier and at the double water gates marine access opening during its operation. 	Control potential impacts from dredging and filling works for Reclamation for Road P2	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.5	It is important that appropriate measures are implemented to control runoff and drainage and prevent high loading of SS from entering the marine environment. Proper site management is essential to minimise surface water runoff, soil erosion and sewage effluents.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.6	Any practical options for the diversion and realignment of drainage should comply with both engineering and environmental requirements in order to ensure adequate hydraulic capacity of all drains.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Design Stage and Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO, TM, DSS

EIA Ref. / EP Submission	Recommended Mitigation Measures	Objectives of the recommended Measures & Main Concerns to address	Who to implement the measures?	Location of the measures	When to Implement the measures?	What requirements or standards for the measures to achieve?
S5.8.7	Construction site runoff and drainage should be prevented or minimised in accordance with the guidelines stipulated in the EPD's Practice Note for Professional Persons, Construction Site Drainage (ProPECC PN 1/94). Good housekeeping and stormwater best management practices, as detailed in below, should be implemented to ensure that all construction runoff complies with WPCO standards and no unacceptable impact on the WSRs arises due to construction of the TKO-LT Tunnel. All discharges from the construction site should be controlled to comply with the standards for effluents discharged into the corresponding WCZ under the TM-DSS.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO, TM-DSS
S5.8.8	Exposed soil areas should be minimised to reduce the potential for increased siltation, contamination of runoff, and erosion. Construction runoff related impacts associated with the above ground construction activities can be readily controlled through the use of appropriate mitigation measures which include:	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.8	<ul style="list-style-type: none"> • use of sediment traps; and 					
S5.8.8	<ul style="list-style-type: none"> • adequate maintenance of drainage systems to prevent flooding and overflow. 					
S5.8.9	Construction site should be provided with adequately designed perimeter channel and pretreatment facilities and proper maintenance. The boundaries of critical areas of earthworks should be marked and surrounded by dykes or embankments for flood protection. Temporary ditches should be provided to facilitate runoff discharge into the appropriate watercourses, via a silt retention pond. Permanent drainage channels should incorporate sediment basins or traps and baffles to enhance deposition rates. The design of efficient silt removal facilities should be based on the guidelines in Appendix A1 of ProPECC PN 1/94.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.10	Ideally, construction works should be programmed to minimise surface excavation works during the rainy season (April to September). All exposed earth areas should be completed as soon as possible after earthworks have been completed, or alternatively, within 14 days of the cessation of earthworks where practicable. If excavation of soil cannot be avoided during the rainy season, or at any time of year when rainstorms are likely, exposed slope surfaces should be covered by tarpaulin or other means.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.11	Sedimentation tanks of sufficient capacity, constructed from pre-formed individual cells of approximately 6 to 8m ³ capacity, are recommended as a general mitigation measure which can be used for settling surface runoff prior to disposal. The system capacity is flexible and able to handle multiple inputs from a variety of sources and particularly suited to applications where the influent is pumped.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.12	Earthworks final surfaces should be well compacted and the subsequent permanent work or surface protection should be carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms. Appropriate drainage like intercepting channels should be provided where necessary.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.13	Measures should be taken to minimize the ingress of rainwater into trenches. If excavation of trenches in wet seasons is necessary, they should be dug and backfilled in short sections. Rainwater pumped out from trenches or foundation excavations should be discharged into storm drains via silt removal facilities.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.14	Open stockpiles of construction materials (for examples, aggregates, sand and fill material) of more than 50m ³ should be covered with tarpaulin or similar fabric during rainstorms. Measures should be taken to prevent the washing away of construction materials, soil, silt or debris into any drainage system.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.15	Manholes (including newly constructed ones) should always be adequately covered and temporarily sealed so as to prevent silt, construction materials or debris being washed into the drainage system and storm runoff being directed into foul sewers. Discharge of surface run-off into foul sewers must always be prevented in order not to unduly overload the foul sewerage system.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.16	Precautions to be taken at any time of year when rainstorms are likely, actions to be taken when a rainstorm is imminent or forecast, and actions to be taken during or after rainstorms are summarised in Appendix A2 of ProPECC PN 1/94. Particular attention should be paid to the control of silty surface runoff during storm events, especially for areas located near steep slopes.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO

EIA Ref. / EP Submission	Recommended Mitigation Measures	Objectives of the recommended Measures & Main Concerns to address	Who to implement the measures?	Location of the measures	When to Implement the measures?	What requirements or standards for the measures to achieve?
S5.8.17	Oil interceptors should be provided in the drainage system and regularly cleaned to prevent the release of oils and grease into the storm water drainage system after accidental spillages. The interceptor should have a bypass to prevent flushing during periods of heavy rain.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.18	All vehicles and plant should be cleaned before leaving a construction site to ensure no earth, mud, debris and the like is deposited by them on roads. An adequately designed and located wheel washing bay should be provided at every site exit, and washwater should have sand and silt settled out and removed at least on a weekly basis to ensure the continued efficiency of the process. The section of access road leading to, and exiting from, the wheelwash bay to the public road should be paved with sufficient backfall toward the wheel-wash bay to prevent vehicle tracking of soil and silty water to public roads and drains.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.19	Silt removal facilities, channels and manholes should be maintained and the deposited silt and grit should be removed regularly, at the onset of and after each rainstorm to ensure that these facilities are functioning properly at all times.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.20	It is recommended that on-site drainage system should be installed prior to the commencement of other construction activities. Sediment traps should be installed in order to minimise the sediment loading of the effluent prior to discharge into foul sewers. There shall be no direct discharge of effluent from the site into the sea.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.21	All temporary and permanent drainage pipes and culverts provided to facilitate runoff discharge should be adequately designed for the controlled release of storm flows. All sediment control measures should be regularly inspected and maintained to ensure proper and efficient operation at all times and particularly following rain storms. The temporarily diverted drainage should be reinstated to its original condition when the construction work has finished or the temporary diversion is no longer required.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.22	All fuel tanks and storage areas should be provided with locks and be located on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank, to prevent spilled fuel oils from reaching the coastal waters.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.23	Minimum distances of 100m shall be maintained between the existing or planned stormwater discharges and the existing or planned seawater intakes during construction and operational phases	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	EIAO-TM, WPCO, TMDSS
S5.8.24	Under normal circumstances, groundwater pumped out of wells, etc. for the lowering of ground water level in basement or foundation construction, and groundwater seepage pumped out of tunnels or caverns under construction should be discharged into storm drains after the removal of silt in silt removal facilities.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.25 - S5.8.27 & Table 5.18	Grouting would be adopted as measure to reduce the groundwater inflow into the tunnel. During the tunnel excavation, the inflow rate of groundwater into the tunnel will be measured during the excavation. The groundwater levels above the tunnel will also be monitored by piezometers. If the inflow rate exceeds the pre-determined groundwater control criteria or the groundwater drawdown exceeds the required limit, pre-excavation grouting will be required to reduce the groundwater inflow. No significant change of groundwater levels would therefore be expected. Any chemicals/ foaming agents which would be entrained to the groundwater should be biodegradable and non-toxic throughout the tunnel construction. Potential groundwater quality impact would be minimal as the used material is non-toxic and biodegradable. No adverse groundwater quality would therefore be expected. Prescriptive measures in the form of an Action Plan with pre-emptive and re-active to preserve the groundwater levels at all times during the tunnel construction are set out in Table 5.18.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO, Buildings Ordinance
S5.8.28	Water used in ground boring and drilling for site investigation or rock / soil anchoring should as far as practicable be recirculated after sedimentation. When there is a need for final disposal, the wastewater should be discharged into storm drains via silt removal facilities.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Design Stage and Construction Phas	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.29 - S5.8.31	Wastewater generated from the washing down of mixing trucks and drum mixers and similar equipment should whenever practicable be recycled. The discharge of wastewater should be kept to a minimum. To prevent pollution from wastewater overflow, the pump sump of any water recycling system should be provided with an online standby pump of adequate capacity and with automatic alternating devices. Under normal circumstances, surplus wastewater may be discharged into foul sewers after treatment in silt removal and pH adjustment facilities (to within the pH range of 6 to 10). Disposal of wastewater into storm drains will require more elaborate treatment.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO

EIA Ref. / EP Submission	Recommended Mitigation Measures	Objectives of the recommended Measures & Main Concerns to address	Who to implement the measures?	Location of the measures	When to Implement the measures?	What requirements or standards for the measures to achieve?
S5.8.32	All vehicles and plant should be cleaned before they leave a construction site to ensure no earth, mud, debris and the like is deposited by them on roads. A wheel washing bay should be provided at every site exit if practicable and wash-water should have sand and silt settled out or removed before discharging into storm drains. The section of construction road between the wheel washing bay and the public road should be paved with backfill to reduce vehicle tracking of soil and to prevent site run-off from entering public road drains.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.33	Bentonite slurries used in diaphragm wall and borepile construction should be reconditioned and reused wherever practicable. If the disposal of a certain residual quantity cannot be avoided, the used slurry may be disposed of at the marine spoil grounds subject to obtaining a marine dumping licence from EPD on a case-by-case basis.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.34	If the used bentonite slurry is intended to be disposed of through the public drainage system, it should be treated to the respective effluent standards applicable to foul sewer, storm drains or the receiving waters as set out in the WPCO Technical Memorandum on Effluent Standards.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.35	Water used in water testing to check leakage of structures and pipes should be reused for other purposes as far as practicable. Surplus unpolluted water could be discharged into storm drains.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.36	Sterilization is commonly accomplished by chlorination. Specific advice from EPD should be sought during the design stage of the works with regard to the disposal of the sterilizing water. The sterilizing water should be reused wherever practicable.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Design Stage and Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.37	Before commencing any demolition works, all sewer and drainage connections should be sealed to prevent building debris, soil, sand etc. from entering public sewers/drains.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.38	Wastewater generated from building construction activities including concreting, plastering, internal decoration, cleaning of works and similar activities should not be discharged into the stormwater drainage system. If the wastewater is to be discharged into foul sewers, it should undergo the removal of settleable solids in a silt removal facility, and pH adjustment as necessary	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.39	Acidic wastewater generated from acid cleaning, etching, pickling and similar activities should be neutralized to within the pH range of 6 to 10 before discharging into foul sewers. If there is no public foul sewer in the vicinity, the neutralized wastewater should be tinkered off site for disposal into foul sewers or treated to a standard acceptable to storm drains and the receiving waters	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO

EIA Ref. / EP Submission	Recommended Mitigation Measures	Objectives of the recommended Measures & Main Concerns to address	Who to implement the measures?	Location of the measures	When to Implement the measures?	What requirements or standards for the measures to achieve?
S5.8.40	Wastewater collected from canteen kitchens, including that from basins, sinks and floor drains, should be discharged into foul sewer via grease traps capable of providing at least 20 minutes retention during peak flow.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.41	Drainage serving an open oil filling point should be connected to storm drains via a petrol interceptor with peak storm bypass.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.42	Vehicle and plant servicing areas, vehicle wash bays and lubrication bays should as far as possible be located within roofed areas. The drainage in these covered areas should be connected to foul sewers via a petrol interceptor. Oil leakage or spillage should be contained and cleaned up immediately. Waste oil should be collected and stored for recycling or disposal in accordance with the Waste Disposal Ordinance.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.43	Construction work force sewage discharges on site are expected to be connected to the existing trunk sewer or sewage treatment facilities. The construction sewage may need to be handled by portable chemical toilets prior to the commission of the on-site sewer system. Appropriate numbers of portable toilets shall be provided by a licensed contractor to serve the large number of construction workers over the construction site. The Contractor shall also be responsible for waste disposal and maintenance practices.	Control potential impacts from construction site runoff and land-based construction	CEDD's Contractors	Work site	Construction Phase	ProPECC PN 1/94, EIAOTM, WPCO
S5.8.44	Contractor must register as a chemical waste producer if chemical wastes would be produced from the construction activities. The Waste Disposal Ordinance (Cap 354) and its subsidiary regulations in particular the Waste Disposal (Chemical Waste) (General) Regulation should be observed and complied with for control of chemical wastes.	Control potential impacts from accidental spillage of chemicals	CEDD's Contractors	Work site	Construction Phase	EIAO-TM, WPCO, WDO
S5.8.45	Any service shop and maintenance facilities should be located on hard standings within a bunded area, and sumps and oil interceptors should be provided. Maintenance of vehicles and equipment involving activities with potential for leakage and spillage should only be undertaken within the areas appropriately equipped to control these discharges.	Control potential impacts from accidental spillage of chemicals	CEDD's Contractors	Work site	Construction Phase	EIAO-TM, WPCO
S5.8.46	Disposal of chemical wastes should be carried out in compliance with the Waste Disposal Ordinance. The "Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes" published under the Waste Disposal Ordinance details the requirements to deal with chemical wastes. General requirements are given as follows: <ul style="list-style-type: none"> suitable containers should be used to hold the chemical wastes to avoid leakage or spillage during storage, handling and transport; chemical waste containers should be suitably labelled, to notify and warn the personnel who are handling the wastes, to avoid accidents; and storage area should be selected at a safe location on site and adequate space should be allocated to the storage area. 	Control potential impacts from accidental spillage of chemicals	CEDD's Contractors	Work site	Construction Phase	EIAO-TM, WPCO, WDO
S5.8.47	Collection and removal of floating refuse should be performed at regular intervals on a daily basis. The contractor should be responsible for keeping the water within the site boundary and the neighbouring water free from rubbish.	Control potential impacts from floating refuse and debris	CEDD's Contractors	Work site	Construction Phase	EIAO-TM, WPCO,
Ecological Impact						
S6.8.4	<p>Measures to Minimize Disturbance</p> <ul style="list-style-type: none"> Use of Quiet Mechanical Plant during the construction phase should be adopted wherever possible. Hoarding or fencing should be erected around the works area boundaries during the construction phase. The hoarding would screen adjacent habitats from construction phase activities, reduce noise disturbance to these habitats and also to restrict access to habitats adjacent to works areas by site workers; Regular spraying of haul roads to minimize impacts of dust deposition on adjacent vegetation and habitats during the construction activities 	Minimize noise, human and traffic disturbance to terrestrial habitat and wildlife; and reduce dust generation	Design Team / Contractor	Land-based works are	Construction Phase	N/A

EIA Ref. / EP Submission	Recommended Mitigation Measures	Objectives of the recommended Measures & Main Concerns to address	Who to implement the measures?	Location of the measures	When to Implement the measures?	What requirements or standards for the measures to achieve?
S6.8.5	<p>Standard Good Site Practice</p> <ul style="list-style-type: none"> Placement of equipment or stockpile in designated works areas and access routes selected on existing disturbed land to minimise disturbance to natural habitats. Construction activities should be restricted to works areas that should be clearly demarcated. The works areas should be reinstated after completion of the works. Waste skips should be provided to collect general refuse and construction wastes. The wastes should be properly disposed off-site in a timely manner. General drainage arrangements should include sediment and oil traps to collect and control construction site run-off. Open burning on works sites is illegal, and should be strictly prohibited. Measures should also be put into place so that litter, fuel and solvents do not enter the nearby watercourses. 	Reduce disturbance to surrounding habitats	Contractor	Land-based works are	Construction Phase	N/A
S6.8.6	<p>Measure to Minimize Groundwater Inflow</p> <ul style="list-style-type: none"> The drained tunnel construction method with groundwater inflow control measures would generally be adopted. During the tunnel excavation, pre-excavation grouting could be adopted to reduce the groundwater inflow and ensure that the tunnel would meet the long term water tightness requirements. 	Minimize groundwater inflow	Contractor	Tunnel	Construction Phase	N/A
S6.8.8	<p>Measure to Minimize Impact on Corals</p> <p><u>Coral translocation</u></p> <ul style="list-style-type: none"> It is recommended to translocate the affected coral colonies, except the locally common <i>Oulastrea crispata</i>, within the reclamation area and bridge footprint to the other suitable locations as far as practicable. The coral translocation should be conducted during the winter months (November-March) in order to avoid disturbance during their spawning period (i.e. July to October). A detailed coral translocation plan with a description on the methodology for pretranslocation coral survey, translocation methodology, identification/proposal of coral recipient site, monitoring methodology for posttranslocation should be prepared during the detailed design stage. The coral translocation plan should be subject to approval by relevant authorities (e.g. EPD and AFCDD) before commencement of the coral translocation. All the translocation exercises should be conducted by experienced marine ecologist(s) who is/are approved by AFCDD prior to commencement of coral translocation. <p><u>Post translocation Monitoring</u></p> <ul style="list-style-type: none"> A coral monitoring programme is recommended to assess any adverse and unacceptable impacts to the translocated coral communities Information gathered during each posttranslocation monitoring survey should include observations on the presence, survival, health condition and growth of the translocated coral colonies. These parameters should then be compared with the baseline results collected from the pre-translocation survey. 	Minimize loss of coral	Design team, contractor, project operator	Within reclamation areas and pier footprint	Prior construction	N/A

EIA Ref. / EP Submission	Recommended Mitigation Measures	Objectives of the recommended Measures & Main Concerns to address	Who to implement the measures?	Location of the measures	When to Implement the measures?	What requirements or standards for the measures to achieve?
S6.8.9 S6.8.10	Measure to Control Water Quality Impact <ul style="list-style-type: none"> Deployment of silt curtains around the active stone column installation points, opening of newly installed seawall and marine works area. Diverting of the site runoff to silt trap facilities before discharging into storm drain; Proper waste and dumping management; and Standard good-site practice for land-based construction. 	Control water quality impact, especially on suspended solid level; minimize the contamination of wastewater discharge, accidental chemical spillage and construction site runoff to the receiving water bodies	Design Team, contractor	Marine and landbased works area	Construction phase	WQO
S6.8.11	Compensation for Vegetation Loss <ul style="list-style-type: none"> Felling of mature trees should be compensated by planting of standard or heavy standard trees within or in vicinity of the affected area as far as practicable. Such compensatory planting for trees should be provided with at least a 1:1 ratio. In addition, vegetation at the temporarily affected area should be reinstated with species similar to the existing condition. 	Compensate for the vegetation loss	Design Team, contractor	Land-based works area	Construction phase	N/A
Fisheries Impact						
S7.7.3	Measure to Control Water Quality Impact <ul style="list-style-type: none"> Deployment of silt curtains around the active stone column installation points, opening of newly installed seawall and marine works area. 	Control water quality impact, especially on suspended solid level	Design Team / Contractor	Marine work area	Construction phase	WQO
Waste Management (Construction Phase)						
S8.6.3	Good Site Practices and Waste Reduction Measures <ul style="list-style-type: none"> Nomination of an approved person, such as a site manager, to be responsible for good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at the site; Training of site personnel in site cleanliness, proper waste management and chemical handling procedures; Provision of sufficient waste disposal points and regular collection of waste; Appropriate measures to minimize windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers; and Regular cleaning and maintenance programme for drainage systems, sumps and oil interceptors. 	To reduce waste management impacts	Contractor	All work sites	Construction Phase	Waste Disposal Ordinance (Cap. 354) Land (Miscellaneous Provisions) Ordinance (Cap. 28)
S8.6.4	Good Site Practices and Waste Reduction Measures (con't) <ul style="list-style-type: none"> Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal; Encourage collection of aluminium cans by providing separate labelled bins to enable this waste to be segregated from other general refuse generated by the workforce; Proper storage and site practices to minimize the potential for damage or contamination of construction materials; and Plan and stock construction materials carefully to minimize amount of waste generated and avoid unnecessary generation of waste. 	To achieve waste reduction	Contractor	All work sites	Construction Phase	Waste Disposal Ordinance (Cap. 354) Land (Miscellaneous Provisions) Ordinance (Cap. 28)
S8.6.5	Good Site Practices and Waste Reduction Measures (con't) The Contractor shall prepare and implement a WMP as part of the EMP in accordance with ETWB TCW No. 19/2005 which describes the arrangements for avoidance, reuse, recovery, recycling, storage, collection, treatment and disposal of different categories of waste to be generated from the construction activities. Such a management plan should incorporate site specific factors, such as the designation of areas for segregation and temporary storage of reusable and recyclable materials. The EMP should be submitted to the Engineer for approval. The Contractor should implement the waste management practices in the EMP throughout the construction stage of the Project. The EMP should be reviewed regularly and updated by the Contractor.	To achieve waste reduction	Contractor	All work sites	Construction Phase	ETWB TCW No. 19/2005

EIA Ref. / EP Submission	Recommended Mitigation Measures	Objectives of the recommended Measures & Main Concerns to address	Who to implement the measures?	Location of the measures	When to Implement the measures?	What requirements or standards for the measures to achieve?
S8.6.6	<p>Good Site Practices and Waste Reduction Measures (con't)</p> <ul style="list-style-type: none"> C&D materials would be reused in the project and other local concurrent projects as far as possible. 	To achieve waste reduction	Contractor	All work sites	Construction Phase	ETWB TCW No. 19/2005
S8.6.7	<p>Storage, Collection and Transportation of Waste</p> <p>Should any temporary storage or stockpiling of waste is required, recommendations to minimize the impacts include:</p> <ul style="list-style-type: none"> Waste, such as soil, should be handled and stored well to ensure secure containment, thus minimizing the potential of pollution; Maintain and clean storage areas routinely; Stockpiling area should be provided with covers and water spraying system to prevent materials from wind-blown or being washed away; and Different locations should be designated to stockpile each material to enhance reuse. 	To minimize potential adverse environmental impacts arising from waste storage	Contractor	All work sites	Construction Phase	ETWB TCW No. 19/2005
S8.6.8/ Waste Management Plan	<p>Storage, Collection and Transportation of Waste (con't)</p> <ul style="list-style-type: none"> Remove waste in timely manner; Waste collectors should only collect wastes prescribed by their permits; Impacts during transportation, such as dust and odour, should be mitigated by the use of covered trucks or in enclosed containers; Obtain relevant waste disposal permits from the appropriate authorities, in accordance with the Waste Disposal Ordinance (Cap. 354), Waste Disposal (Charges for Disposal of Construction Waste) Regulation (Cap. 345) and the Land (Miscellaneous Provisions) Ordinance (Cap. 28); Waste should be disposed of at licensed waste disposal facilities/ alternative disposal ground approved by RE and DEP; and Maintain records of quantities of waste generated, recycled and disposed. 	To minimize potential adverse environmental impacts arising from waste collection and disposal	Contractor	All work sites	Construction Phase	ETWB TCW No. 19/2005
S8.6.9/ Waste Management Plan	<p>Storage, Collection and Transportation of Waste (con't)</p> <ul style="list-style-type: none"> Implementation of trip ticket system with reference to DEVB TC(W) No. 6/2010, Trip Ticket System for Disposal of Construction & Demolition Materials, to monitor disposal of waste and to control fly-tipping at PFRFs or landfills. A recording system for the amount of waste generated, recycled and disposed (including disposal sites) should be proposed. 	To minimize potential adverse environmental impacts arising from waste collection and disposal	Contractor	All work sites	Construction Phase	DEVB TCW No. 6/2010
S8.6.11 - S8.6.13/ Waste Management Plan	<p>Sorting of C&D Materials</p> <ul style="list-style-type: none"> Sorting to be performed to recover the inert materials, reusable and recyclable materials before disposal off-site. Specific areas shall be provided by the Contractors for sorting and to provide temporary storage areas for the sorted materials. The C&D materials should at least be segregated into inert and non-inert materials, in which the inert portion could be reused and recycled in the reclamation as far as practicable before delivery to PFRFs. While opportunities for reusing the non-inert portion should be investigated before disposal of at designated landfills 	To minimize potential adverse environmental	Contractor	All work sites	Construction Phase	DEVB TCW No. 6/2010 ETWB TCW No. 33/2002 ETWB TCW No. 19/2005
S8.6.17 – S8.6.20	<p>Sediments (con't)</p> <ul style="list-style-type: none"> Requirements of the Air Pollution Control (Construction Dust) Regulation, where relevant, shall be adhered to during boring, excavation, transportation and disposal of sediments or cement stabilization of sediment. A treatment area should be confined for carrying out the cement stabilization mixing and temporary stockpile. The area should be designed to prevent leachate from entering the ground. Leachate, if any, should be collected and discharged according to the Water Pollution Control Ordinance (WPCO). In order to minimise the potential odour / dust emissions during boring, excavation and transportation of the sediment, the excavated sediments should be kept wet during excavation/boring and should be properly covered when placed on barges/trucks. Loading of the excavated sediment to the barge should be controlled to avoid splashing and overflowing of the sediment slurry to the surrounding water. In order to minimise the exposure to contaminated materials, workers should, when necessary, wear appropriate personal protective equipments (PPE) when handling contaminated sediments. Adequate washing and cleaning facilities should also be provided on site. 	To determine the best handling and treatment of sediment	Contractor	All works areas with sediments concern	Construction Phase	ETWB TCW No. 19/2005

EIA Ref. / EP Submission	Recommended Mitigation Measures	Objectives of the recommended Measures & Main Concerns to address	Who to implement the measures?	Location of the measures	When to Implement the measures?	What requirements or standards for the measures to achieve?
S8.6.24 - S8.6.28/ Waste Management Plan	<p>Sediments (con't)</p> <ul style="list-style-type: none"> The excavated sediments is expected to be loaded onto the barge and transported to the designated disposal sites allocated by the MFC. The excavated sediment would be disposed of according to its determined disposal options and ETWB TC(W) No. 34/2002. Stockpiling of contaminated sediments should be avoided as far as possible. If temporary stockpiling of contaminated sediments is necessary, the excavated sediment should be covered by tarpaulin and the area should be placed within earth bunds or sand bags to prevent leachate from entering the ground, nearby drains and surrounding water bodies. The stockpiling areas should be completely paved or covered by linings in order to avoid contamination to underlying soil or groundwater. Separate and clearly defined areas should be provided for stockpiling of contaminated and uncontaminated materials. Leachate, if any, should be collected and discharged according to the Water Pollution Control Ordinance (WPCO). In order to minimise the potential odour / dust emissions during boring and transportation of the sediment, the excavated sediments should be kept wet during excavation/boring and should be properly covered when placed on barges. Loading of the excavated sediment to the barge should be controlled to avoid splashing and overflowing of the sediment slurry to the surrounding water. The barge transporting the sediments to the designated disposal sites should be equipped with tight fitting seals to prevent leakage and should not be filled to a level that would cause overflow of materials or laden water during loading or transportation. In addition, monitoring of the barge loading shall be conducted to ensure that loss of material does not take place during transportation. Transport barges or vessels shall be equipped with automatic self-monitoring devices as specified by the DEP. In order to minimise the exposure to contaminated materials, workers should, when necessary, wear appropriate personal protective equipments (PPE) when handling contaminated sediments. Adequate washing and cleaning facilities should also be provided on site. Another possible arrangement for Type 3 disposal is by geosynthetic containment. A geosynthetic containment method is a method whereby the sediments are sealed in geosynthetic containers and, at the disposal site, the containers would be dropped into the designated contaminated mud pit where they would be covered by further mud disposal and later by the mud pit capping, thereby meeting the requirements for fully confined mud disposal. 	To ensure handling of sediments are in accordance to statutory requirements	Contractor	All works areas with sediments concern	Construction Phase	ETWB TC(W) No. 34/2002 & Dumping at Sea Ordinance
S8.6.26/ Waste Management Plan	<p>Chemical Wastes.</p> <ul style="list-style-type: none"> If chemical wastes are produced at the construction site, the Contractor would be required to register with the EPD as a Chemical Waste Producer and to follow the guidelines stated in the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes. Good quality containers compatible with the chemical wastes should be used, and incompatible chemicals should be stored separately. Appropriate labels should be securely attached on each chemical waste container indicating the corresponding chemical characteristics of the chemical waste, such as explosive, flammable, oxidizing, irritant, toxic, harmful, corrosive, etc. The Contractor shall use a licensed collector to transport and dispose of the chemical wastes, to either the Chemical Waste Treatment Centre at Tsing Yi, or other licensed facility, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation. 	To ensure proper management of chemical waste	Contractor	All works sites	Construction Phase	Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes Waste Disposal (Chemical Waste) (General) Regulation

EIA Ref. / EP Submission	Recommended Mitigation Measures	Objectives of the recommended Measures & Main Concerns to address	Who to implement the measures?	Location of the measures	When to Implement the measures?	What requirements or standards for the measures to achieve?
S8.6.27/ Waste Management Plan	<p>General Refuse</p> <ul style="list-style-type: none"> General refuse should be stored in enclosed bins or compaction units separate from C&D material. A reputable waste collector should be employed by the contractor to remove general refuse from the site, separately from C&D material. Preferably an enclosed and covered area should be provided to reduce the occurrence of 'wind blown' light material. 	To ensure proper management of general refuse	Contractor	All works sites	Construction Phase	Public Health and Municipal Services Ordinance (Cap. 132)
Impact on Cultural Heritage (Construction Phase)						
S9.6.4	<p>Dust and visual impacts</p> <ul style="list-style-type: none"> Temporarily fenced off buffer zone with allowance for public access (minimum 1 m) should be provided; The open yard in front of the temple should be kept as usual for annual Tin Hau festival; Monitoring of vibration impacts should be conducted when the construction works are less than 100m from the temple. 	To prevent dust and visual impacts	Contractors	Work areas	Construction Phase	EIAO; GCHIA; AMO
S9.6.4	<p>Indirect vibration impact</p> <ul style="list-style-type: none"> Vibration level is suggest to be controlled within a peak particle velocity (ppv) limit of 5mm/s measured inside the historical buildings; Monitoring of vibration should be carried out during construction phase. Tilting and settlement monitoring should will be applied on the Cha Kwo Ling Tin Hau Temple as well. A proposal with details for the mitigation measures and monitoring of impacts on built heritage shall be submitted to AMO for comments before commencement of work. 	To prevent indirect vibration impact	Contractors	Work areas	Construction Phase	Vibration Limits on Heritage Buildings by CEDD; GCHIA; AMO.
Built Heritage Mitigation Plan	<ul style="list-style-type: none"> Established Alert, Alarm and Action Level for the monitoring parameters. To increase the instrumentation monitoring and reporting frequency. To propose detailed action plan or contingency plan for the Engineer's approval when AAA Level is reached or exceeded. 	To prevent vibration impacts	NE/2015/01	Tin Hau Temple	Construction Phase	Vibration Limits on Heritage Buildings by CEDD; GCHIA; AMO.
Landscape and Visual Impact (Construction Phase)						
Table 10.8.1/ Landscape Mitigation Plan	CM1 - Construction area and contractor's temporary works areas to be minimised to avoid impacts on adjacent landscape.	Avoid impact on adjacent landscape areas	CEDD (via Contractor)	General	Construction planning and during construction period	N/A
Table 10.8.1/ Landscape Mitigation Plan	CM2 - Reduction of construction period to practical minimum.	Minimise duration of impact	CEDD (via Contractor)	N/A	Construction planning	N/A
Table 10.8.1/ Landscape Mitigation Plan	CM3 - Topsoil, where the soil material meets acceptable criteria and where practical, to be stripped and stored for re-use in the construction of the soft landscape works. The Contract Specification shall include storage and reuse of topsoil as appropriate.	To allow re-use of topsoil	CEDD (via Contractor)	General	Site clearance	As per the Particular Specification
Table 10.8.1/ Landscape Mitigation Plan	CM4 - Existing trees at boundary of site and retained trees within site boundary to be carefully protected during construction. Detailed Tree Protection Specification shall be provided in the Contract Specification, under which the Contractor shall be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in contractor's works areas. (Tree protection measures will be detailed at Tree Removal Application stage).	To minimize tree loss	CEDD (via Contractor)	As per approved Tree Removal Application(s)	Site clearance and throughout construction period	ETWB TC 3/2006 and as per tree protection measures in Particular Specification

EIA Ref. / EP Submission	Recommended Mitigation Measures	Objectives of the recommended Measures & Main Concerns to address	Who to implement the measures?	Location of the measures	When to Implement the measures?	What requirements or standards for the measures to achieve?
Table 10.8.1/ Landscape Mitigation Plan	CM5 - Trees unavoidably affected by the works shall be transplanted where practicable. Where possible, trees should be transplanted direct to permanent locations rather than temporary holding nurseries. A detailed tree transplanting specification shall be provided in the Contract Specification and sufficient time for preparation shall be allowed in the construction programme.	To maximize preservation of existing trees	CEDD (via Contractor)	As per approved Tree Removal Application(s)	Site clearance	ETWB TC 3/2006 and as per tree protection measures in Particular Specification
Table 10.8.1/ Landscape Mitigation Plan	CM6 - Advance screen planting of fast growing tree and shrub species to noise barriers and hoardings. Trees shall be capable of reaching a height >10m within 10 years.	To maximize screening of the works	CEDD (via Contractor)	At Lam Tin Interchange and edge of Road P2 landscape deck, TKO	Beginning of construction period	N/A
Table 10.8.1/ Landscape Mitigation Plan	CM7 - Hydroseeding or sheeting of soil stockpiles with visually unobtrusive material	To reduce visual intrusion	CEDD (via Contractor)	General	Throughout construction period	As per Particular Specification
Table 10.8.1/ Landscape Mitigation Plan	CM8 - Control of night-time lighting by hooding all lights and through minimisation of night working periods.	To reduce visual intrusion	CEDD (via Contractor)	General	Throughout construction period	N/A
Table 10.8.1/ Landscape Mitigation Plan	CM9 - Screening of works areas with hoardings with appropriate colours compatible with the surrounding area	Reduction of visual intrusion	CEDD (via Contractor)	Project site Boundary	Excretion of site hoarding	N/A
Table 10.8.1/ Landscape Mitigation Plan	CM10 - Avoidance of excessive height and bulk of site buildings and structure	Reduction of visual intrusion and integration with environment	CEDD (via Contractor)	Built structures	Design and construction stage	N/A
Table 10.8.1/ Landscape Mitigation Plan	CM11 - Limitation of run-off into freshwater streams, ponds and sea areas	Avoidance of contamination of water courses and water bodie	CEDD (via Contractor)	TKO reclamation, TKO tunnel portal, Cha Kwo Ling roadworks	Throughout construction period	N/A
Table 10.8.1	CM12 - Minimise area of reclamation and design the edges sensitively to tie in with adjacent coastline characte	Minimise loss of Junk Bay and integration with existing coastlin	CEDD (via Contractor)	Temporary reclamation for barging points at TKO and Lam Tin and permanent reclamation for TKO Interchange slip roads and Road P2	Construction planning and reclamation stages	N/A
Landfill Gas Hazard (Design and Construction Phase)						
S11.5.9	A Safety Officer, trained in the use of gas detection equipment and landfill gas-related hazards, should be present on site throughout the groundworks phase. The Safety Officer should be provided with an intrinsically safe portable instrument, which is appropriately calibrated and able to measure the following gases in the ranges indicated below: Methane 0-100% LEL and 0100% v/v Carbon dioxide 0-100% Oxygen 0-21%	Protect the workers from landfill gas hazards	Contractor	Project sites within the Sai Tso Wan Landfill Consultation Zone	Construction phase	EPD's Landfill Gas Hazard Assessment Guidance Note

EIA Ref. / EP Submission	Recommended Mitigation Measures	Objectives of the recommended Measures & Main Concerns to address	Who to implement the measures?	Location of the measures	When to Implement the measures?	What requirements or standards for the measures to achieve?
S11.5.10 S11.5.25	<p>Safety Measures</p> <ul style="list-style-type: none"> For staff who work in, or have responsibility for “at risk” area, such as all excavation workers, supervisors and engineers working within the Consultation Zone, should receive appropriate training on working in areas susceptible to landfill gas, fire and explosion hazards. An excavation procedure or code of practice to minimize landfill gas related risk should be devised and carried out. No worker should be allowed to work alone at any time in or near to any excavation. At least one other worker should be available to assist with a rescue if needed. Smoking, naked flames and all other sources of ignition should be prohibited within 15m of any excavation or ground-level confined space. “No smoking” and “No naked flame” notices should be posted prominently on the construction site and, if necessary, special areas should be designed for smoking. Welding, flame-cutting or other hot works should be confined to open areas at least 15m from any trench or excavation. Welding, flame-cutting or other hot works may only be carried out in trenches or confined spaces when controlled by a “permit to work” procedure, properly authorized by the Safety Officer (or, in the case of small developments, other appropriately qualified person). The permit to work procedure should set down clearly the requirements for continuous monitoring for methane, carbon dioxide and oxygen throughout the period during which the hot works are in progress. The procedure should also require the presence of an appropriately qualified person, in attendance outside the ‘confined area’, who should be responsible for reviewing the gas measurements as they are made, and who should have executive responsibility for suspending the work in the event of unacceptable or hazardous conditions. Only those workers who are appropriately trained and fully aware of the potentially hazardous conditions which may arise should be permitted to carry out hot works in confined areas. Where there are any temporary site offices, or any other buildings located within the Sai Tso Wan Landfill Consultation Zone which have enclosed spaces with the capacity to accumulate landfill gas, then they should either be located in an area which has been proven to be free of landfill gas (by survey using portable gas detectors); or be raised clear of the ground by a minimum of 500mm. This aims to create a clear void under the structure which is ventilated by natural air movement such that emission of gas from the ground are mixed and diluted by air. Any electrical equipment, such as motors and extension cords, should be intrinsically safe. During piping assembly or conduiting construction, all valves/seals should be closed immediately after installation. As construction progresses, all valves/seals should be closed to prevent the migration of gases through the pipeline/conduit. All piping /conduiting should be capped at the end of each working day. During construction, adequate fire extinguishing equipment, fire-resistant clothing and breathing apparatus (BA) sets should be made available on site. Fire drills should be organized at not less than six monthly intervals. 	Protect the workers from landfill gas hazards	Contractor	Project sites within the Sai Tso Wan Landfill Consultation Zone	Construction phase	EPD’s Landfill Gas Hazard Assessment Guidance Note Labour Department’s Code of Practice for Safety and Health at Work in Confined Space

EIA Ref. / EP Submission	Recommended Mitigation Measures	Objectives of the recommended Measures & Main Concerns to address	Who to implement the measures?	Location of the measures	When to Implement the measures?	What requirements or standards for the measures to achieve?
S11.5.10 S11.5.25	<ul style="list-style-type: none"> The contractor should formulate a health and safety policy, standards and instructions for site personnel to follow. All personnel who work on the site and all visitors to the site should be made aware of the possibility of ignition of gas in the vicinity of excavations. Safety notices (in Chinese and English) should be posted at prominent position around the site warning danger of the potential hazards. Service runs within the Consultation Zone should be designated as "special routes"; utilities companies should be informed of this and precautionary measures should be implemented. Precautionary measures should include ensuring that staff members are aware of the potential hazards of working in confined spaces such as manholes and service chambers, and that appropriate monitoring procedures are in place to prevent hazards due to asphyxiating atmospheres in confined spaces. Detailed guidance on entry into confined spaces is given in Code of Practice on Safety and Health at Work in Confined Spaces (Labour Department, Hong Kong). Periodically during ground-works construction within the 250m Consultation Zone, the works area should be monitored for methane, carbon dioxide and oxygen using appropriately calibrated portable gas detection equipment. The monitoring frequency and areas to be monitored should be set down prior to commencement of ground-works either by the Safety Officer or an approved and appropriately qualified person. 					
S11.5.26 - S11.5.31	<p>Monitoring</p> <ul style="list-style-type: none"> Routine monitoring should be carried out in all excavations, manholes, chambers, relocation of monitoring wells and any other confined spaces that may have been created. All measurements in excavations should be made with the extended monitoring tube located not more than 10 mm from the exposed ground surface. Monitoring should be performed properly to make sure that the area is free of landfill gas before any man enters into the area. For excavations deeper than 1m, measurements should be carried out: <ul style="list-style-type: none"> at the ground surface before excavation commences;- immediately before any worker enters the excavation; at the beginning of each working day for the entire period the excavation remains open; and periodically throughout the working day whilst workers are in the excavation. For excavations between 300mm and 1m deep, measurements should be carried out: <ul style="list-style-type: none"> directly after the excavation has been completed; and periodically whilst the excavation remains open. For excavations less than 300mm deep, monitoring may be omitted, at the discretion of the Safety Officer or other appropriately qualified person. Depending on the results of the measurements, actions required will vary and should be set down by the Safety Officer or other appropriately qualified person. The exact frequency of monitoring should be determined prior to the commencement of works, but should be at least once per day, and be carried out by a suitably qualified or qualified person before starting the work of the day. Measurements shall be recorded and kept as a record of safe working conditions with copies of the site diary and submitted to the Engineer for approval. The Contractor may elect to carry out monitoring via an automated monitoring system. 	Protect the workers from landfill gas hazards	Contractor	Project sites within the Sai Tso Wan Landfill Consultation Zone	Construction phase	EPD's Landfill Gas Hazard Assessment Guidance Note
S11.5.32	The hazards from landfill gas during the construction stage within the Sai Tso Wan Landfill Consultation Zone should be minimized by suitable precautionary measures recommended in Chapter 8 of the Landfill Gas Hazard Assessment Guidance Note.	<p>construction stage within the Sai Tso Wan</p> <p>Protect the workers from landfill gas hazards</p>	Contractor	Project sites within the Sai Tso Wan Landfill Consultation Zone	Construction phase	EPD's Landfill Gas Hazard Assessment Guidance Note

Table II - Observation / Reminder / Non-compliance made during Site Audit

- Key:
- ✓ Observation/reminder was made during site audit but improved/rectified by the contractor in the next site audit
 - ✗ Observation/reminder was made during site audit but not yet improved/rectified by the contractor in the next site audit
 - # Follow up action will be reported in next reporting month
 - * Non-compliance of mitigation measure
 - Non-compliance but improved by the contractor

EIA Ref	Recommended Mitigation Measures	Details of Reminder/Observation	Recorded Date	Status
Air Quality				
S3.8.7	Every stock of more than 20 bags of cement or dry pulverised fuel ash (PFA) should be covered entirely by impervious sheeting or placed in an area sheltered on the top and the 3 sides.	More than 20 bags of cement should be covered by impervious material cover at EVB LG1/F.	1 Aug 2024	✓
S3.8.7	Every stock of more than 20 bags of cement or dry pulverised fuel ash (PFA) should be covered entirely by impervious sheeting or placed in an area sheltered on the top and the 3 sides.	More than 20 bags of cement should be covered by impervious cover at EVB LG1/F.	8 Aug 2024	✓
S3.8.7	Every stock of more than 20 bags of cement or dry pulverised fuel ash (PFA) should be covered entirely by impervious sheeting or placed in an area sheltered on the top and the 3 sides.	More than 20 bags of cement should be covered by impervious sheeting. (EBV LG1/F).	22 Aug 2024	✓
Construction Noise Impact				
--	--	--		
Water Quality Impact				
--	--	--		
Ecological Impact				
--	--	--		
Fisheries Impact				
--	--	--		
Waste Management				
S8.6.4	Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal.	Drip tray should be provided to oil/chemical containers to prevent leakage at EVB Roof Floor.	1 Aug 2024	✓
S8.6.4	Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal.	Drip tray should be provided to chemical/oil containers to prevent leakage at EVB Roof Floor.	8 Aug 2024	✓
Landscape and Visual Impact				
--	--	--		
Landfill Gas Hazards				
--	--	--		

APPENDIX L
EVENT AND ACTION PLANS

Event and Action Plan for Air Quality (Dust)

EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
Action level being exceeded by one sampling	<ol style="list-style-type: none"> 1. Identify source, investigate the causes of complaint and propose remedial measures; 2. Inform IEC and ER; 3. Repeat measurement to confirm finding; 4. Increase monitoring frequency to daily. 	<ol style="list-style-type: none"> 1. Check monitoring data submitted by ET; 2. Check Contractor's working method. 	<ol style="list-style-type: none"> 1. Notify Contractor. 	<ol style="list-style-type: none"> 1. Rectify any unacceptable practice; 2. Amend working methods if appropriate.
Action level being exceeded by two or more consecutive sampling	<ol style="list-style-type: none"> 1. Identify source; 2. Inform IEC and ER; 3. Advise the ER on the effectiveness of the proposed remedial measures; 4. Repeat measurements to confirm findings; 5. Increase monitoring frequency to daily; 6. Discuss with IEC and Contractor on remedial actions required; 	<ol style="list-style-type: none"> 1. Check monitoring data submitted by ET; 2. Check Contractor's working method; 3. Discuss with ET and Contractor on possible remedial measures; 4. Advise the ET on the effectiveness of the proposed remedial measures; 5. Supervise Implementation of remedial measures. 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of exceedance in writing; 2. Notify Contractor; 3. Ensure remedial measures properly implemented. 	<ol style="list-style-type: none"> 1. Submit proposals for remedial actions to IEC within three working days of notification; 2. Implement the agreed proposals; 3. Amend proposal if appropriate.

	<ol style="list-style-type: none"> 7. If exceedance continues, arrange meeting with IEC and ER; 8. If exceedance stops, cease additional monitoring. 			
Limit level being exceeded by one sampling	<ol style="list-style-type: none"> 1. Identify source, investigate the causes of exceedance and propose remedial measures; 2. Inform Contractor ,IEC, ER, and EPD; 3. Repeat measurement to confirm finding; 4. Increase monitoring frequency to daily; 5. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results. 	<ol style="list-style-type: none"> 1. Check monitoring data submitted by ET; 2. Check Contractor's working method; 3. Discuss with ET and Contractor on possible remedial measures; 4. Advise the ER on the effectiveness of the proposed remedial measures; 5. Supervise implementation of remedial measures. 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of exceedance in writing; 2. Notify Contractor; 3. Ensure remedial measures properly implemented. 	<ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance; 2. Submit proposals for remedial actions to IEC within three working days of notification; 3. Implement the agreed proposals; 4. Amend proposal if appropriate.
Limit level being exceeded by two or more consecutive sampling	<ol style="list-style-type: none"> 1. Notify IEC, ER, Contractor and EPD; 2. Identify source; 3. Repeat measurement to confirm findings; 4. Increase monitoring frequency to daily; 	<ol style="list-style-type: none"> 1. Discuss amongst ER, ET, and Contractor on the potential remedial actions; 2. Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly; 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of exceedance in writing; 2. Notify Contractor; 3. In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented; 	<ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance; 2. Submit proposals for remedial actions to IEC within three working days of notification; 3. Implement the agreed proposals;

	<ol style="list-style-type: none"> 5. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented; 6. Arrange meeting with IEC and ER to discuss the remedial actions to be taken; 7. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; 8. If exceedance stops, cease additional monitoring. 	<ol style="list-style-type: none"> 3. Supervise the implementation of remedial measures. 	<ol style="list-style-type: none"> 4. Ensure remedial measures properly implemented; 5. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated. 	<ol style="list-style-type: none"> 4. Resubmit proposals if problem still not under control; 5. Stop the relevant portion of works as determined by the ER until the exceedance is abated.
--	---	---	--	--

Event and Action Plan for Construction Noise

EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
Action Level	<ol style="list-style-type: none"> 1. Notify IEC and Contractor; 2. Carry out investigation; 3. Report the results of investigation to the IEC, ER and Contractor; 4. Discuss with the Contractor and formulate remedial measures; 5. Increase monitoring frequency to check mitigation effectiveness. 	<ol style="list-style-type: none"> 1. Review the analysed results submitted by the ET; 2. Review the proposed remedial measures by the Contractor and advise the ER accordingly; 3. Supervise the implementation of remedial measures. 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing; 2. Notify Contractor; 3. Require Contractor to propose remedial measures for the analysed noise problem; 4. Ensure remedial measures are properly implemented. 	<ol style="list-style-type: none"> 1. Submit noise mitigation proposals to IEC; 2. Implement noise mitigation proposals.
Limit Level	<ol style="list-style-type: none"> 1. Identify source; 2. Inform IEC, ER, EPD and Contractor; 3. Repeat measurements to confirm findings; 4. Increase monitoring frequency; 5. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented; 6. Inform IEC, ER and EPD the causes and actions taken for the exceedances; 7. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; 8. If exceedance stops, cease additional monitoring. 	<ol style="list-style-type: none"> 1. Discuss amongst ER, ET, and Contractor on the potential remedial actions; 2. Review Contractors remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly; 3. Supervise the implementation of remedial measures. 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing; 2. Notify Contractor; 3. Require Contractor to propose remedial measures for the analysed noise problem; 4. Ensure remedial measures properly implemented; 5. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated. 	<ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance; 2. Submit proposals for remedial actions to IEC within 3 working days of notification; 3. Implement the agreed proposals; 4. Resubmit proposals if problem still not under control; 5. Stop the relevant portion of works as determined by the ER until the exceedance is abated.

Limit Levels and Action Plan for Landfill Gas

Parameter	Limit Level	Action
Oxygen	<19%	<ul style="list-style-type: none"> • Ventilate to restore oxygen to >19%
	<18%	<ul style="list-style-type: none"> • Stop works • Evacuate personnel/prohibit entry • Increase ventilation to restore oxygen to >19%
Methane	>10% LEL (i.e. > 0.5% by volume)	<ul style="list-style-type: none"> • Prohibit hot works • Ventilate to restore methane to <10% LEL
	>20% LEL (i.e. > 1% by volume)	<ul style="list-style-type: none"> • Stop works • Evacuate personnel / prohibit entry • Increase ventilation to restore methane to <10% LEL
Carbon Dioxide	>0.5%	<ul style="list-style-type: none"> • Ventilate to restore carbon dioxide to < 0.5%
	>1.5%	<ul style="list-style-type: none"> • Stop works • Evacuate personnel / prohibit entry • Increase ventilation to restore carbon dioxide to <0.5%

**APPENDIX M
SUMMARIES OF ENVIRONMENTAL
COMPLAINT, WARNING, SUMMON
AND NOTIFICATION OF SUCCESSFUL
PROSECUTION**

Contract No. ED/2018/04

Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron

Appendix M – Summary of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution

Reporting Month: August 2024

Table M1 Summary of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution Received in the Reporting Period

Log Ref.	Location	Received Date	Details of Complaint/warning/summon and prosecution	Nature	Investigation/Mitigation Action	Status
--	--	--	--	--	--	--

Remarks: No environmental complaint were received in the reporting period, no warning/ summon and prosecution were received in the reporting period.

Contract No. ED/2018/04

Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron

Appendix M – Summary of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution

Reporting Month: August 2024

Table M2 Cumulative Log for Environmental Complaint, Warning, Summon and Notification of Successful Prosecution

Log Ref.	Location	Received Date	Details of Complaint/warning/summon and prosecution	Nature	Investigation/Mitigation Action	Status
Complaint #N02	Portion T1	10-Oct-2020	Resident of Yau Lai Estate complained that i) an excavator operated before 7 am on 9 and 10 October 2020; and, ii) the height of noise barriers are not sufficient for noise reduction.	Noise	<ul style="list-style-type: none"> Contractor was recommended to scheduled noisy works to less sensitive hours (e.g. normal weekdays between 08:00-19:00) to minimize noise nuisance. Since the complaint location stated in part II is situated out of the project boundary and within the other construction site, no investigation shall be conducted for non-project related complaint. 	Closed
Complaint #N04	Portion T1	9-Feb-2021	Resident of Cha Kwo Ling village revealed that some breaking noise was heard at his/her residence (near Cha kwo Ling Main Street) from the ground at about 20:00 on 08 Feb, 2021	Noise	<ul style="list-style-type: none"> The construction activities of Trunk Road T2 conducted inside the tunnel area and the construction activities of TKO-LT Tunnel conducted inside the tunnel section at Kwun Tong Side on the evening time and night-time of the date of complaint are considered as one of the potential noise source of the ground borne noise nuisance. 	Closed
		6 March 2021	The complainant informed that they continues to hear breaking noise during 3-4 a.m. and caused serious noise nuisance to the residents.			

Contract No. ED/2018/04

Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron

Appendix M – Summary of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution

Reporting Month: August 2024

Log Ref.	Location	Received Date	Details of Complaint/warning/summon and prosecution	Nature	Investigation/Mitigation Action	Status
					<ul style="list-style-type: none">• A valid CNP was hold and the construction activities being taken were complied with the relevant CNP.• Blast door was fully enclosed when construction activities were carried out within tunnel area to prevent, reduce or minimize the emission of airborne noise• In addition, the Contractor should still maintain good site practices, such as schedule noisy work to the less sensitive hours and provide regularly maintenance for PMEs.• Contractor is recommended to continue to strictly follow the requirements in the relevant CNP.• According to the condition 3.d point 5 of the CNP (GW-RE0071-21), the immediate remedial action shall be implemented in case adverse ground-borne noise impact on any noise sensitive receiver is received.	

Contract No. ED/2018/04

Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron

Appendix M – Summary of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution

Reporting Month: August 2024

Log Ref.	Location	Received Date	Details of Complaint/warning/summon and prosecution	Nature	Investigation/Mitigation Action	Status
Complaint #N05	Portion T1	18 July 2021	Complainant informed that breaking noise was heard at his/her residence (near Cha Kwo Ling Main Road) from the ground during 3-4 a.m. on 17 Jul and 18 Jul 2021.	Noise	<ul style="list-style-type: none"> • The construction activities of Trunk Road T2 conducted inside the tunnel area and the construction activities of TKO-LT Tunnel conducted inside the tunnel section at Kwun Tong Side on the evening time and night-time of the date of complaint are considered as one of the potential noise source of the ground borne noise nuisance. • A valid CNP was hold and the construction activities being taken were complied with the relevant CNP. • Blast door was fully enclosed when construction activities were carried out within tunnel area to prevent, reduce or minimize the emission of airborne noise • In addition, the Contractor should still maintain good site practices, such as schedule noisy work to the less sensitive hours and provide regularly maintenance for PMEs. • Contractor is recommended to 	Closed
		27 July 2021	Complainant further informed that they continued to hear underground breaking noise during 3-5 a.m. on 27 July 2021.			

Contract No. ED/2018/04

Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron

Appendix M – Summary of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution

Reporting Month: August 2024

Log Ref.	Location	Received Date	Details of Complaint/warning/summon and prosecution	Nature	Investigation/Mitigation Action	Status
					continue to strictly follow the requirements in the relevant CNP. <ul style="list-style-type: none"> • According to the condition 3.d point 5 of the CNP (GW-RE0399-21), the immediate remedial action shall be implemented in case adverse ground-borne noise impact on any noise sensitive receiver is received. 	
Complaint #N06	Portion T1	03-Nov-2021	Complainant informed that underground breaking noise was heard at his/her residence (near Cha Kwo Ling Main Road) at about 10 p.m. on 03 Nov 2021. Also, the complainant further informed that recently they continued to hear underground breaking noise which had caused serious noise nuisance to the residents.	Noise	<ul style="list-style-type: none"> • No major construction noise related environmental deficiency was identified during ad-hoc inspection carried out by ET, RE and the Contractor representative on 12 November 2021. • The construction activities of Trunk Road T2 conducted inside the tunnel area and the construction activities of TKO-LT Tunnel conducted inside the tunnel section at Kwun Tong Side on the evening time and night-time of the date of complaint are considered as one of the potential noise source of the ground borne noise nuisance. 	Closed

Contract No. ED/2018/04

Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron

Appendix M – Summary of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution

Reporting Month: August 2024

Log Ref.	Location	Received Date	Details of Complaint/warning/summon and prosecution	Nature	Investigation/Mitigation Action	Status
Complaint #N06	Portion T1	25-Nov-2021	<p>Follow up complaint from the same complainant which informed that there was still ground bound noise nuisance after 10 p.m occasionally.</p> <p>The complainant further requested if the relevant works that may contribute to ground bound noise nuisance could be stopped after 10 p.m.</p>	Noise	<ul style="list-style-type: none"> • A valid CNP was hold and the investigation is still undertaken in order to investigate the construction activities being taken were complied with the relevant CNP. • Blast door was fully enclosed when construction activities were carried out within tunnel area to prevent, reduce or minimize the emission of airborne noise • In addition, the Contractor should still maintain good site practices, such as schedule noisy work to the less sensitive hours and provide regularly maintenance for PMEs. • Contractor is recommended to continue to strictly follow the requirements in the relevant CNP. • According to the condition 3.d point 5 of the CNP (GW-RE1035-21), the immediate remedial action shall be implemented in case adverse ground-borne noise impact on any noise sensitive receiver is received. 	Closed

Contract No. ED/2018/04

Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron

Appendix M – Summary of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution

Reporting Month: August 2024

Log Ref.	Location	Received Date	Details of Complaint/warning/summon and prosecution	Nature	Investigation/Mitigation Action	Status
Complaint #N07	Portion T1	17-Feb-22	Complainant informed that noise from drilling activities near Tin Hau Temple was perceived all day.	Noise	<ul style="list-style-type: none"> The construction activities of Trunk Road T2 conducted inside the tunnel area and the construction activities of TKO-LT Tunnel conducted inside the tunnel section at Kwun Tong Side are considered as one of the potential noise source of the ground borne noise nuisance. A valid CNP was hold and the construction activities being taken were complied with the relevant CNP. Blast door was fully enclosed when construction activities were carried out within tunnel area to prevent, reduce or minimize the emission of airborne noise In addition, the Contractor should still maintain good site practices, such as schedule noisy work to the less sensitive hours and provide 	Closed
		24-March-22	Follow up complaint from the same complainant was received and he/she informed that the day time ground-borne noise nuisance had deteriorated this week.			

Contract No. ED/2018/04

Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron

Appendix M – Summary of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution

Reporting Month: August 2024

Log Ref.	Location	Received Date	Details of Complaint/warning/summon and prosecution	Nature	Investigation/Mitigation Action	Status
		12-April-22	3 rd complaint from the same complainant was received again, he/ she complained that his/ her family were affected by the noise from construction site of T2 at the night-time period and felt no improvement on this issues.		regularly maintenance for PMEs. <ul style="list-style-type: none"> • Contractor is recommended to continue to strictly follow the requirements in the relevant CNP and the approved CNMP. • According to the condition 3.d point 5 of the CNP (GW-RE1201-21, GW-RE0199-22), the immediate remedial action shall be implemented in case adverse ground-borne noise impact on any noise sensitive receiver is received. 	
Complaint #N08	Portion T1	19-Oct-22	Complainant informed that the groundborne noise was heard at his/her residence (near Cha Kwo Ling Main Road) everyday, including the public holiday. Also, the complainant further informed that recently they continued to hear groudborne noise which had caused serious noise nuisance to the residents	Noise	<ul style="list-style-type: none"> • A valid CNP was hold and construction activities being taken were complied with the relevant CNP • Blast door was fully enclosed when construction activities were carried out within tunnel area to prevent, reduce or minimize the emission of airborne noise • In addition, the Contractor should still maintain good site practices, such as schedule noisy work to the less sensitive hours and provide 	Closed

Contract No. ED/2018/04

Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron

Appendix M – Summary of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution

Reporting Month: August 2024

Log Ref.	Location	Received Date	Details of Complaint/warning/summon and prosecution	Nature	Investigation/Mitigation Action	Status
					regularly maintenance for PMEs. <ul style="list-style-type: none"> Contractor is recommended to continue to strictly follow the requirements in the relevant CNP and the approved CNMP. According to the condition 3.d point 5 of the CNP (GW-RE0997-22), the immediate remedial action shall be implemented in case adverse ground-borne noise impact on any noise sensitive receiver is received 	
Complaint #N09	Portion T1	28-Oct-22	Complainant informed that the underground breaking noise was heard at her residence (near Cha Kwo Ling Main Road) after the blasting work every day.	Noise	<ul style="list-style-type: none"> A valid CNP was hold and construction activities being taken were complied with the relevant CNP Blast door was fully enclosed when construction activities were carried out within tunnel area to prevent, reduce or minimize the emission of airborne noise In addition, the Contractor should still maintain good site practices, such as schedule noisy work to the less sensitive hours and provide regularly maintenance for PMEs. 	Closed

Contract No. ED/2018/04

Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron

Appendix M – Summary of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution

Reporting Month: August 2024

Log Ref.	Location	Received Date	Details of Complaint/warning/summon and prosecution	Nature	Investigation/Mitigation Action	Status
					<ul style="list-style-type: none"> Contractor is recommended to continue to strictly follow the requirements in the relevant CNP and the approved CNMP. According to the condition 3.d point 5 of the CNP (GW-RE0997-22), the immediate remedial action shall be implemented in case adverse ground-borne noise impact on any noise sensitive receiver is received 	
Complaint #N11	Portion T1 & Portion V	11th August 2023	Complainant informed that there was a noise nuisance from construction work between 8 am and 7 pm, causing an impact on the residents. -	Noise	<ul style="list-style-type: none"> A valid CNP was hold and construction activities being taken were complied with the relevant CNP The contractor has taken steps to address noise concerns by implementing noise control measures such as erecting noise barriers and using a hydraulic breaker equipped with a noise muffler. In addition, the Contractor should still maintain good site practices, such as schedule noisy work to the 	Closed

Contract No. ED/2018/04

Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron

Appendix M – Summary of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution

Reporting Month: August 2024

Log Ref.	Location	Received Date	Details of Complaint/warning/summon and prosecution	Nature	Investigation/Mitigation Action	Status
					less sensitive hours and provide regularly maintenance for PMEs. <ul style="list-style-type: none"> • Contractor is recommended to continue to strictly follow the requirements in the relevant CNP and the approved CNMP. • According to the condition 3.d point 5 of the CNP (GW-RE0603-23), the immediate remedial action shall be implemented in case adverse ground-borne noise impact on any noise sensitive receiver is received 	
		23rd August 2023	The complainant informed that there were vibrations caused by the works in CKL Tunnel on 21 August 2023. They stated that their units are temporary housing with certain risks involved and requested an explanation for the project as well as appropriate actions to be taken		<ul style="list-style-type: none"> • A valid CNP was hold and construction activities being taken were complied with the relevant CNP • The contractor has taken steps to address noise concerns by implementing noise control measures such as erecting noise barriers and using a hydraulic breaker equipped with a noise muffler. • In addition, the Contractor should 	Closed

Contract No. ED/2018/04

Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron

Appendix M – Summary of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution

Reporting Month: August 2024

Log Ref.	Location	Received Date	Details of Complaint/warning/summon and prosecution	Nature	Investigation/Mitigation Action	Status
					still maintain good site practices, such as schedule noisy work to the less sensitive hours and provide regularly maintenance for PMEs. <ul style="list-style-type: none">• Contractor is recommended to continue to strictly follow the requirements in the relevant CNP and the approved CNMP.• According to the condition 3.d point 5 of the CNP (GW-RE0603-23), the immediate remedial action shall be implemented in case adverse ground-borne noise impact on any noise sensitive receiver is received	
		6th September 2023	EPD received a complaint from a resident of Cha Kwo Ling Village regarding vibrations caused by the construction works of the T2 project on 5 September 2023. The complainant stated that these vibrations are affecting House No. 78 in the village.	Noise	<ul style="list-style-type: none">• A valid CNP was hold and construction activities being taken were complied with the relevant CNP• The weekly noise monitoring and additional noise assessments have verified that the noise levels remain within the set limits. Moreover, the groundborne noise measurements	Closed

Contract No. ED/2018/04

Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron

Appendix M – Summary of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution

Reporting Month: August 2024

Log Ref.	Location	Received Date	Details of Complaint/warning/summon and prosecution	Nature	Investigation/Mitigation Action	Status
					<p>data suggests that the noise levels are well within the criteria outlined in the TM.</p> <ul style="list-style-type: none">• The contractor has taken steps to address noise concerns by implementing noise control measures such as erecting noise barriers and using a hydraulic breaker equipped with a noise muffler.• In addition, the Contractor should still maintain good site practices, such as schedule noisy work to the less sensitive hours and provide regularly maintenance for PMEs.• Contractor is recommended to continue to strictly follow the requirements in the relevant CNP and the approved CNMP.• According to the condition 3.d point 5 of the CNP (GW-RE0973-23), the	

Contract No. ED/2018/04

Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron

Appendix M – Summary of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution

Reporting Month: August 2024

Log Ref.	Location	Received Date	Details of Complaint/warning/summon and prosecution	Nature	Investigation/Mitigation Action	Status
					immediate remedial action shall be implemented in case adverse ground-borne noise impact on any noise sensitive receiver is received	

APPENDIX N
SUMMARY OF EXCEEDANCE

Contract No. ED/2018/04

Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron

Appendix N – Summary of Exceedance

Reporting Period: August 2024

(A) Exceedance Report for Air Quality

No Action and no Limit Level exceedance of 24hr TSP monitoring was recorded in this reporting month.

No Action/ Limit Level exceedance of 1hr TSP monitoring was recorded in this reporting month.

(B) Exceedance Report for Construction Noise

No Action Level exceedance was recorded due to the documented complaint in the reporting month.

No Limit Level exceedance for construction noise monitoring was recorded in the reporting month.

(C) Exceedance Report for Landfill Gas

(NIL in the reporting month).

**APPENDIX O
TENTATIVE CONSTRUCTION
PROGRAMME**

Activity ID	Activity Name	Dur	Start	Finish	2024		
					Aug	Sep	Oct
HKT2 P65Bis 3-mth rolling (Aug24 - Oct24)		974	20-Jul-22 A	19-Mar-25			
Construction		974	20-Jul-22 A	19-Mar-25			
Trunk Road T2		974	20-Jul-22 A	19-Mar-25			
01 West Ventilation Building - WVB		166	02-Jun-24	14-Nov-24			
WVB - Main works		99	02-Jun-24	08-Sep-24			
A229447190	EVB - ABWF	78	02-Jun-24*	18-Aug-24		EVB - ABWF	
A229446640	WVB - Statutory Inspection	92	02-Jun-24*	01-Sep-24		WVB - Statutory Inspection	
A229447200	EVB - E&M	92	02-Jun-24*	01-Sep-24		EVB - E&M	
A229446641	WVB - FSI	7	02-Sep-24	08-Sep-24		WVB - FSI	
WVB - Remaining works after FSI		45	01-Oct-24	14-Nov-24			
External Works		45	01-Oct-24	14-Nov-24			
A229447220	WVB - External Drainage (DPR side)	45	01-Oct-24*	14-Nov-24			
Architectural Finishes		30	01-Oct-24	30-Oct-24			
A229447260	WVB - Fins & Cladding (KFR side)	30	01-Oct-24*	30-Oct-24			
WVB - Substructure		83	10-Jul-24	07-Oct-24			
Basement Structure		83	10-Jul-24	07-Oct-24			
A229449840	WVB - Basement 1 waterproofing & Mass Fill	27	10-Jul-24	06-Aug-24		WVB - Basement 1 waterproofing & Mass Fill	
A229449810	WVB - Strut S1 Removal	27	07-Aug-24	03-Sep-24		WVB - Strut S1 Removal	
A229449790	WVB - Basement 1 wall part 2 + Ground Floor Slab	50	14-Aug-24	07-Oct-24		WVB - Basement 1 wall part 2 + Ground Floor Slab	
02 AtGrade Road -AGR		200	15-Jun-24 A	31-Dec-24			
Kiosk		97	16-Sep-24	31-Dec-24			
A229419065	Kiosk - fabrication & delivery	97	16-Sep-24*	31-Dec-24			
AGR - Road & Drainage works		140	15-Jun-24 A	01-Nov-24			
AG1030	AGR - WB Drainage & Gully Installation	74	15-Jun-24 A	02-Sep-24		AGR - WB Drainage & Gully Installation	
AG1020	AGR - EB Drainage & Gully Installation	54	03-Sep-24	01-Nov-24			
AG1120	AGR - WB Road Side Barrier	60	03-Sep-24	01-Nov-24			
03 Depressed Road - DPR		45	30-Sep-24	13-Nov-24			
DPR10000	DPR - Temporary Platform removal	45	30-Sep-24*	13-Nov-24			
05 Supporting Underground Structure - SUS		157	02-Jul-24	05-Dec-24			
SUS - Tunnel Structure Works		55	25-Jul-24	17-Sep-24			
Eastbound Structure		55	25-Jul-24	17-Sep-24			
EB Skin Wall		55	25-Jul-24	17-Sep-24			
Crown		40	09-Aug-24	17-Sep-24			
A229448430	EB SUS - Skin Wall - Crown Level Bay 5	8	09-Aug-24	16-Aug-24		EB SUS - Skin Wall - Crown Level Bay 5	
A229448440	EB SUS - Skin Wall - Crown Level Bay 6	8	17-Aug-24	24-Aug-24		EB SUS - Skin Wall - Crown Level Bay 6	
A229448450	EB SUS - Skin Wall - Crown Level Bay 7	8	25-Aug-24	01-Sep-24		EB SUS - Skin Wall - Crown Level Bay 7	
A229448460	EB SUS - Skin Wall - Crown Level Bay 8	8	02-Sep-24	09-Sep-24		EB SUS - Skin Wall - Crown Level Bay 8	
A229448470	EB SUS - Skin Wall - Crown Level Bay 9	8	10-Sep-24	17-Sep-24		EB SUS - Skin Wall - Crown Level Bay 9	
Road level		16	25-Jul-24	09-Aug-24			
A229448080	EB SUS - Skin Wall - Road Level Bay 22	15	25-Jul-24*	08-Aug-24		EB SUS - Skin Wall - Road Level Bay 22	
A229447951	EB SUS - Skin Wall - Road Level Bay 9	15	26-Jul-24*	09-Aug-24		EB SUS - Skin Wall - Road Level Bay 9	
Westbound Structure		48	27-Jul-24	12-Sep-24			
WB Skin Wall		48	27-Jul-24	12-Sep-24			
Road level		48	27-Jul-24	12-Sep-24			
A229448270	WB SUS - Skin Wall - Road Level Bay 18	9	27-Jul-24*	04-Aug-24		WB SUS - Skin Wall - Road Level Bay 18	
A229448280	WB SUS - Skin Wall - Road Level Bay 19	9	05-Aug-24	13-Aug-24		WB SUS - Skin Wall - Road Level Bay 19	
A229448290	WB SUS - Skin Wall - Road Level Bay 20	9	14-Aug-24	22-Aug-24		WB SUS - Skin Wall - Road Level Bay 20	
A229448300	WB SUS - Skin Wall - Road Level Bay 21	9	23-Aug-24	31-Aug-24		WB SUS - Skin Wall - Road Level Bay 21	
A229448490	WB SUS - Skin Wall Inspection and handover to IS Team	12	01-Sep-24	12-Sep-24		WB SUS - Skin Wall Inspection and handover to IS Team	
SUS - Tunnel Civil Works		157	02-Jul-24	05-Dec-24			
Eastbound TCW		157	02-Jul-24	05-Dec-24			
EB Fireboard		99	02-Jul-24	16-Oct-24			
Crown level		24	19-Sep-24	16-Oct-24			
A229447820	SUS - EB - Fire Board - Tunnel crown (skin wall)	24	19-Sep-24	16-Oct-24			
Road level		81	02-Jul-24	25-Sep-24			

- ◆ Milestones
-  Planned Bar
-  Actual Bar

ED/2018/04 Trunk Road T2 and Infrastructure Works
for Developments at South Apron
Three Months Rolling Programme (Aug24 - Oct24)

Date	Revision	Checked	Approved

Activity ID	Activity Name	Dur	Start	Finish	2024		
					Aug	Sep	Oct
A8920	SUS - EB - Fire Board - Road Level NCPS remaining	24	10-Aug-24	04-Sep-24	SUS - EB - Fire Board - Road Level NCPS remaining		
A229448480	SUS - EB - Fire Board - Road Level CPS remaining	81	02-Jul-24*	25-Sep-24	SUS - EB - Fire Board - Road Level CPS remaining		
EB E&M brackets		68	15-Aug-24	21-Oct-24			
A229446300	EB SUS - E&M brackets CPS	47	15-Aug-24*	30-Sep-24	EB SUS - E&M brackets CPS		
A229446330	EB SUS - E&M brackets NCPS	21	01-Oct-24*	21-Oct-24	EB SUS - E&M brackets		
EB TCSS provision		24	22-Oct-24	14-Nov-24			
SUS10070	SUS EB - TCSS provision	24	22-Oct-24	14-Nov-24			
EB Road Barrier		45	22-Oct-24	05-Dec-24			
SUS10060	SUS EB - Road Barrier	45	22-Oct-24	05-Dec-24*			
Westbound TCW		52	13-Sep-24	03-Nov-24			
WB Fireboard		24	13-Sep-24	10-Oct-24			
Road level		24	13-Sep-24	10-Oct-24			
A8490	SUS - WB - Fire Board - Road Level NCPS remaining	24	13-Sep-24	10-Oct-24	SUS - WB - Fire Board - Road Level NCPS remaining		
WB E&M brackets		24	10-Oct-24	03-Nov-24			
A229446310	WB SUS - E&M brackets NCPS	24	10-Oct-24	03-Nov-24			
06 Launching Shaft & C&C Tunnel - LSCC		215	07-May-24 A	07-Dec-24			
LSCC - Structure works		215	07-May-24 A	07-Dec-24			
Cut & Cover Tunnel		45	02-Oct-24	15-Nov-24			
C&C OHVD		45	02-Oct-24	15-Nov-24			
LSCC10215	C&C EB OHVD - Pour 2 (6m)	15	02-Oct-24	16-Oct-24	C&C EB OHVD - Pour 2 (6m)		
LSCC10220	C&C EB OHVD - Pour 3 (5m)	15	17-Oct-24	31-Oct-24			
LSCC10235	C&C WB OHVD - Pour 2 (6m)	15	01-Nov-24	15-Nov-24			
Launching Shaft		215	07-May-24 A	07-Dec-24			
LS - Top Slab		118	07-May-24 A	01-Sep-24			
A229448530	LS - EB Top slab Pour 3	118	07-May-24 A	01-Sep-24	LS - EB Top slab Pour 3		
A229448560	LS - WB Top slab Pour 3	118	07-May-24 A	01-Sep-24	LS - WB Top slab Pour 3		
Late Stitch/C&C		73	02-Sep-24	13-Nov-24			
LSCC10270	Late Stitch/C&C - OHVD Slab + ARL Walls (72m3)	20	02-Sep-24	21-Sep-24	Late Stitch/C&C - OHVD Slab + ARL Walls (72m3)		
LSCC10280	Late Stitch/C&C - Above RL headwall (16m3)	10	22-Sep-24	01-Oct-24	Late Stitch/C&C - Above RL headwall (16m3)		
LSCC10290	Late Stitch/C&C - Roof Slab (135m3) + falsework removal	22	02-Oct-24	23-Oct-24	Late Stitch/C&C - Roof Slab (135m3) + falsework removal		
LSCC10291	Late Stitch/C&C - Massfill breaking	7	24-Oct-24	30-Oct-24	Late Stitch/C&C - Massfill breaking		
LSCC10330	Late Stitch/C&C - Base Slab to Road Slab (NCPS)	14	31-Oct-24	13-Nov-24	Late Stitch/C&C - Base Slab to Road Slab (NCPS)		
Late Stitch/TSS		124	01-Jul-24	01-Nov-24			
LSCC10170	Late Stitch/TSS - WB OHVD Slab	39	01-Jul-24*	08-Aug-24	Late Stitch/TSS - WB OHVD Slab		
LSCC10260	Late Stitch/TSS - Above RL headwall (63m3)	28	09-Aug-24	05-Sep-24	Late Stitch/TSS - Above RL headwall (63m3)		
LSCC10261	Falsework removal	7	06-Sep-24	12-Sep-24	Falsework removal		
LSCC10271	Erection Temporary steel deck	14	13-Sep-24	26-Sep-24	Erection Temporary steel deck		
LSCC10300	Late Stitch/TSS - BRL slab - Drilling & exposing coupler (1200nos)	12	27-Sep-24	08-Oct-24	Late Stitch/TSS - BRL slab - Drilling & exposing coupler (1200nos)		
LSCC10310	Late Stitch/TSS - BRL slab - Rebar fixing	12	09-Oct-24	20-Oct-24	Late Stitch/TSS - BRL slab - Rebar fixing		
LSCC10320	Late Stitch/TSS - BRL slab - Curved formwork	12	21-Oct-24	01-Nov-24	Late Stitch/TSS - BRL slab - Curved formwork		
LS - Miscellaneous Structural Openings		120	10-Aug-24	07-Dec-24			
A229448610	Temporary cable procurement 4mth lead time (TBC)	120	10-Aug-24*	07-Dec-24	Temporary cable procurement 4mth lead time (TBC)		
05 RC works at MMEP Opening for Service Galleries Works (subject to BYME & IS team cc)		28	01-Nov-24	28-Nov-24			
A229448650	Stage 1 - Narrow the opening to 3.5m*2m RC works	28	01-Nov-24*	28-Nov-24	Stage 1 - Narrow the opening to 3.5m*2m RC works		
LSCC - Backfilling & Dwall Dismantling		161	09-May-24 A	16-Oct-24			
A229447760	Stage 1 backfilling (from -15.0mPD to -10.5mPD) 12000m3	161	09-May-24 A	16-Oct-24	Stage 1 backfilling (from -15.0mPD to -10.5mPD) 12000m3		
07 Tunnel Sub-sea (TSS)		329	28-Jan-24 A	21-Dec-24			
Tunnel Excavation - TBM from Kai Tak		298	11-Feb-24 A	04-Dec-24			
Eastbound (EB) - TBM S1282		287	11-Feb-24 A	23-Nov-24			
TBM Tunnelling		287	11-Feb-24 A	23-Nov-24			
CP21-26		218	11-Feb-24 A	15-Sep-24			
EBTBM1250	EB TBM stop	218	11-Feb-24 A	15-Sep-24	EB TBM stop		
CP26-30		69	16-Sep-24	23-Nov-24			
EBTBM1260	EB TBM Tunnelling CH8632-8675 (Seawall section)	26	16-Sep-24	11-Oct-24	EB TBM Tunnelling CH8632-8675 (Seawall section)		
EBTBM1270	EB TBM Tunnelling CH8675-8748 (Seawall section)	43	12-Oct-24	23-Nov-24	EB TBM Tunnelling CH8675-8748 (Seawall section)		

- ◆ Milestones
- Planned Bar
- Actual Bar

ED/2018/04 Trunk Road T2 and Infrastructure Works
for Developments at South Apron
Three Months Rolling Programme (Aug24 - Oct24)

Date	Revision	Checked	Approved
------	----------	---------	----------

Activity ID	Activity Name	Dur	Start	Finish	2024		
					Aug	Sep	Oct
Westbound (WB) - TBM S1281		137	21-Jul-24	04-Dec-24			
TBM Tunneling		137	21-Jul-24	04-Dec-24			
CP26-31		137	21-Jul-24	04-Dec-24			
A229444320	WB TBM Tunnelling CH8675-8776 (Seawall section)	60	21-Jul-24	18-Sep-24	WB TBM Tunnelling CH8675-8776 (Seawall section)		
A229444330	WB TBM Tunnelling CH8776-8875 (Pilot tunnel section)	38	19-Sep-24	26-Oct-24	WB TBM Tunnelling CH8776-8875 (Pilot tunnel section)		
A229445930	WB TBM Tunnelling CH8854-8975 (Pilot tunnel section)	39	27-Oct-24	04-Dec-24	WB TBM Tunnelling CH8854-8975 (Pilot tunnel section)		
Tunnel Civil Works (TCW) before TBM breakthrough		329	28-Jan-24 A	21-Dec-24			
Eastbound (EB)		278	28-Jan-24 A	31-Oct-24			
Temporary Services		14	01-Sep-24	14-Sep-24			
TBM slurry pipe relocation		14	01-Sep-24	14-Sep-24			
A229447660	TSS - EB NCPS Wall Pipe Relocation from CP21 to CP22	7	01-Sep-24*	07-Sep-24	TSS - EB NCPS Wall Pipe Relocation from CP21 to CP22		
A229447670	TSS - EB NCPS Wall Pipe Relocation from CP22 to CP23	7	08-Sep-24	14-Sep-24	TSS - EB NCPS Wall Pipe Relocation from CP22 to CP23		
Service Gallery		198	08-Mar-24 A	28-Oct-24			
CP21-26		198	08-Mar-24 A	28-Oct-24			
A229446190	EB TSS - ISIG Stoppage at CH8446	184	08-Mar-24 A	14-Oct-24	EB TSS - ISIG Stoppage at CH8446		
A229428552	EB TSS - Service Gallery up to CP 25	14	14-Oct-24	28-Oct-24	EB TSS - Service Gallery up to CP 25		
Below Road Level Installation		56	03-Jun-24	05-Aug-24			
MIMEP		56	03-Jun-24	05-Aug-24			
A229444660	EB TSS - MIMEP module installation up to CP11	56	03-Jun-24	05-Aug-24	EB TSS - MIMEP module installation up to CP11		
A229444690	EB TSS - MIMEP module installation up to CP24	56	03-Jun-24	05-Aug-24	EB TSS - MIMEP module installation up to CP24		
OHVD		203	28-Jan-24 A	17-Aug-24			
A229441810	EB TSS - ISSG stoppage at CP22	187	28-Jan-24 A	02-Aug-24	EB TSS - ISSG stoppage at CP22		
A229441820	EB TSS - ISSG up to CP23	6	02-Aug-24	07-Aug-24	EB TSS - ISSG up to CP23		
A229447560	EB TSS - ISSG dismantling for relocation to WB	10	08-Aug-24	17-Aug-24	EB TSS - ISSG dismantling for relocation to WB		
Fire Board - Road level		93	03-Jul-24	10-Oct-24			
A229447570	EB TSS - Fire Board - Wall NCPS up to CP22	93	03-Jul-24	10-Oct-24	EB TSS - Fire Board - Wall NCPS up to CP22		
Road Barrier		60	26-Jul-24	23-Sep-24			
NCPS		60	26-Jul-24	23-Sep-24			
TC10120	EB TSS - Road Barrier NCPS from CP19 to CP20	8	26-Jul-24	02-Aug-24	EB TSS - Road Barrier NCPS from CP19 to CP20		
TC10130	EB TSS - Road Barrier NCPS from CP20 to CP21	8	03-Aug-24	10-Aug-24	EB TSS - Road Barrier NCPS from CP20 to CP21		
TC10140	EB TSS - Road Barrier NCPS from CP21 to CP22	8	08-Sep-24	15-Sep-24	EB TSS - Road Barrier NCPS from CP21 to CP22		
TC10150	EB TSS - Road Barrier NCPS from CP22 to CP23	8	16-Sep-24	23-Sep-24	EB TSS - Road Barrier NCPS from CP22 to CP23		
E&M Brackets		84	01-Aug-24	31-Oct-24			
NCPS		84	01-Aug-24	31-Oct-24			
A22180	EB TSS - E&M Brackets NCPS up to CP22	84	01-Aug-24*	31-Oct-24	EB TSS - E&M Brackets NCPS up to CP22		
TCSS Civil provision at OHVD soffit		27	06-Jul-24	02-Aug-24			
A229418542	EB TSS - TCSS Provision up to CP26	27	06-Jul-24	02-Aug-24	EB TSS - TCSS Provision up to CP26		
Westbound (WB)		142	02-Aug-24	21-Dec-24			
Service Gallery		46	19-Sep-24	03-Nov-24			
CP21-26		12	19-Sep-24	30-Sep-24			
A229445900	WB TSS - Service Gallery up to CP 26	12	19-Sep-24	30-Sep-24	WB TSS - Service Gallery up to CP 26		
CP26-31		8	27-Oct-24	03-Nov-24			
A229424680	WB TSS - Service Gallery up to CP 27	8	27-Oct-24	03-Nov-24	WB TSS - Service Gallery up to CP 27		
Corbel		65	29-Aug-24	13-Nov-24			
CP21-26		65	29-Aug-24	13-Nov-24			
A229415231	WB TSS - Corbel Structure & Curing up to CP25	15	29-Aug-24	13-Sep-24	WB TSS - Corbel Structure & Curing up to CP25		
A229415232	WB TSS - Corbel Structure & Curing up to CP26	15	26-Oct-24	13-Nov-24	WB TSS - Corbel Structure & Curing up to CP26		
OHVD		38	18-Aug-24	24-Sep-24			
CP26-30		38	18-Aug-24	24-Sep-24			
TC3180	WB - ISSG Transfer & Reassembly from EB	21	18-Aug-24	07-Sep-24	WB - ISSG Transfer & Reassembly from EB		
TC3170	WB TSS - OHVD up to CP23	4	08-Sep-24	11-Sep-24	WB TSS - OHVD up to CP23		
TC3160	WB TSS - OHVD up to CP24	4	12-Sep-24	16-Sep-24	WB TSS - OHVD up to CP24		
TC3120	WB TSS - OHVD up to CP25	4	20-Sep-24	24-Sep-24	WB TSS - OHVD up to CP25		
Fire Board - Tunnel Crown		66	02-Aug-24	06-Oct-24			
D12425	Aerial Platform re-assembly and WB Tunnel	12	02-Aug-24	13-Aug-24	Aerial Platform re-assembly and WB Tunnel		

- ◆ Milestones
- Planned Bar
- Actual Bar

ED/2018/04 Trunk Road T2 and Infrastructure Works
for Developments at South Apron

Three Months Rolling Programme (Aug24 - Oct24)

Date	Revision	Checked	Approved

Activity ID	Activity Name	Dur	Start	Finish	2024		
					Aug	Sep	Oct
D12435	WB TSS - Fire board - Tunnel Crown up to CP22	6	14-Aug-24	19-Aug-24	WB TSS - Fire board - Tunnel Crown up to CP22		
D12515	WB TSS - Fire board - Tunnel Crown up to CP23	8	19-Aug-24	27-Aug-24	WB TSS - Fire board - Tunnel Crown up to CP23		
D12525	WB TSS - Fire board - Tunnel Crown up to CP24	8	27-Aug-24	04-Sep-24	WB TSS - Fire board - Tunnel Crown up to CP24		
D12535	WB TSS - Fire board - Tunnel Crown up to CP25	8	04-Sep-24	12-Sep-24	WB TSS - Fire board - Tunnel Crown up to CP25		
D12545	WB TSS - Fire board - Tunnel Crown up to CP26	8	12-Sep-24	20-Sep-24	WB TSS - Fire board - Tunnel Crown up to CP26		
D12555	WB TSS - Fire board - Tunnel Crown up to CP27	8	20-Sep-24	28-Sep-24	WB TSS - Fire board - Tunnel Crown up to CP27		
D12565	WB TSS - Fire board - Tunnel Crown up to CP28	8	28-Sep-24	06-Oct-24	WB TSS - Fire board - Tunnel Crown up to CP28		
Fire Board - Road level		95	12-Sep-24	15-Dec-24			
A229446450	WB TSS - Fire Board - Road level up to CP23	14	12-Sep-24	25-Sep-24	WB TSS - Fire Board - Road level up to CP23		
A229446510	CP22 to CP24	95	12-Sep-24	15-Dec-24			
E&M Brackets		87	26-Sep-24	21-Dec-24			
TC11060	WB TSS - E&M Brackets up to CP23	6	26-Sep-24	01-Oct-24	WB TSS - E&M Brackets up to CP23		
TC11240	WB TSS - E&M Brackets up to CP21-CP24	87	26-Sep-24	21-Dec-24			
08 CKL Tunnel		213	02-Jun-24	31-Dec-24			
Eastbound CKL		213	02-Jun-24	31-Dec-24			
CKL10040	EB Type A - OHVD Formwork Assembly	14	15-Aug-24*	28-Aug-24	EB Type A - OHVD Formwork Assembly		
CKL10020	EVB Portal EB - OHVD	92	02-Jun-24*	01-Sep-24	EVB Portal EB - OHVD		
CKL10070	EB Type C - lining	77	01-Jul-24*	15-Sep-24	EB Type C - lining		
CKL10130	EB Type C - Crown formwork dismantling	14	16-Sep-24	29-Sep-24	EB Type C - Crown formwork dismantling		
CKL10090	EB Type A - OHVD	62	29-Aug-24	29-Oct-24	EB T		
CKL10220	EB Type A - E&M Brackets	30	15-Oct-24*	13-Nov-24			
CKL10210	EB CKL - E&M Installation (before BT)	60	01-Nov-24*	30-Dec-24			
CKL10140	EB Type C - OHVD	63	30-Oct-24*	31-Dec-24			
Westbound CKL		132	24-Jul-24	02-Dec-24			
CKL10030	WB CKL - Road Barrier CP32 to Portal	21	01-Aug-24*	21-Aug-24	WB CKL - Road Barrier CP32 to Portal		
CKL10050	WB CKL - Road Barrier CP32 to OHVD Bay 9)	14	22-Aug-24	04-Sep-24	WB CKL - Road Barrier CP32 to OHVD Bay 9)		
CKL10060	WB CKL - Pretunnel invert breaking (68m) 1m per day	68	24-Jul-24	29-Sep-24	WB CKL - Pretunnel invert breaking (68m) 1m per day		
CKL10080	WB CKL - Fireboard CH9238 to CH9258 CPS & NCPS	20	08-Oct-24*	27-Oct-24	WB CKL		
CKL10120	WB CKL - E&M Brackets (before BT up to OHVD Bay 11)	30	28-Oct-24	26-Nov-24			
CKL10150	WB - Big Bulkhead wall rebuild	45	15-Oct-24*	28-Nov-24			
CKL10100	EVB Portal WB - OHVD	92	02-Sep-24	02-Dec-24			
09 Cross Passages		150	14-Jul-24	10-Dec-24			
Cross Passages by Mini TBM (CP7 to CP29)		115	02-Aug-24	24-Nov-24			
CP25		115	02-Aug-24	24-Nov-24			
TD0110	CP25 - WB - Tympanum Civil works CH8489	27	02-Aug-24	28-Aug-24	CP25 - WB - Tympanum Civil works CH8489		
TD0100	CP25 - EB - Tympanum Civil works CH8489	27	28-Oct-24	24-Nov-24			
CP26		27	01-Oct-24	27-Oct-24			
TD0210	CP26 - WB - Tympanum Civil works CH8588	27	01-Oct-24	27-Oct-24	CP26 - W		
Cross Passages @ CKL Tunnel (CP30 to CP33)		150	14-Jul-24	10-Dec-24			
CP30 advance works		124	09-Aug-24	10-Dec-24			
A229443620	CP30 - Excavation (13.6m2 * 14m, 200m3, 5m3/d)	44	09-Aug-24	21-Sep-24	CP30 - Excavation (13.6m2 * 14m, 200m3, 5m3/d)		
A229428832	CP30 - Base Slab & Kicker	40	22-Sep-24	31-Oct-24			
A229428842	CP30 - Lining & collar Structure	40	01-Nov-24	10-Dec-24			
CP31 advance works		78	04-Sep-24	20-Nov-24			
A229443880	CP31 - Backfill	26	04-Sep-24	29-Sep-24	CP31 - Backfill		
A229438416	CP31 - Lining Structure	26	30-Sep-24	25-Oct-24	CP31 - Lining		
A229422640	CP31 - Collar	26	26-Oct-24	20-Nov-24			
CP32		52	14-Jul-24	03-Sep-24			
A229438436	CP32 - Lining Structure	26	14-Jul-24	08-Aug-24	CP32 - Lining Structure		
A229422590	CP32 - Collar	26	09-Aug-24	03-Sep-24	CP32 - Collar		
CP33		126	24-Jul-24	26-Nov-24			
A1710	CP33 - Rock Plug Excavation	26	24-Jul-24	18-Aug-24	CP33 - Rock Plug Excavation		
A1720	CP33 - CP33/Type E Junction	67	19-Aug-24	24-Oct-24	CP33 - CP33/Ty		
A1980	CP33 - Lining Formwork Assembly	33	25-Oct-24	26-Nov-24			

- ◆ Milestones
- Planned Bar
- Actual Bar

ED/2018/04 Trunk Road T2 and Infrastructure Works
for Developments at South Apron
Three Months Rolling Programme (Aug24 - Oct24)

Date	Revision	Checked	Approved
------	----------	---------	----------

Activity ID	Activity Name	Dur	Start	Finish	2024		
					Aug	Sep	Oct
10 East Ventilation Building - EVB		880	20-Jul-24	19-Mar-25			
D12615	WB Base Slab + BL Wall	724	20-Jul-24	27-Sep-24	WB Base Slab + BL Wall		
D12645	WB BL Slab	29	28-Sep-24	30-Oct-24	WB BL Slab		
D12655	WB Portal Frame Erection	13	31-Oct-24	13-Nov-24	WB Portal Frame Erection		
GBP		137	31-Aug-24	28-Jan-25			
A40252	314 submission (VAC) by BYME	0		29-Oct-24			◆ 314 s
A40242	GBP Final amendment submission and approval	53	31-Aug-24*	29-Oct-24	GBP		
A40262	3 month approval period from FSD	83	30-Oct-24	28-Jan-25			
EVB Construction		264	03-Jun-24	19-Mar-25			
Building Structure + ABWF & E&M Works		264	03-Jun-24	19-Mar-25			
A229449430	EVB - RC works (LG2 OHVD Slabs EB & WB)	67	03-Jun-24*	13-Aug-24	EVB - RC works (LG2 OHVD Slabs EB & WB)		
A1040	EVB - Removal of Tower Crane (TC1)	3	30-Sep-24*	03-Oct-24	EVB - Removal of Tower Crane (TC1)		
A229449410	EVB - RC works (LG1 Walls & G/F Slab)	139	03-Jun-24*	31-Oct-24			
A229449420	EVB - RC works (G/F Walls & Roof Slab)	144	12-Oct-24	19-Mar-25			
Footbridge FB03		100	27-Jul-24	12-Nov-24			
A10040	Bridge Deck Construction + Bearing Installation	50	27-Jul-24	17-Sep-24	Bridge Deck Construction + Bearing Installation		
A10050	ABWF Works	50	19-Sep-24	12-Nov-24			
EVA & UU		68	27-Jul-24	08-Oct-24			
EVA Connection Deck Construction		54	27-Jul-24	23-Sep-24			
A100070	Slab formwork	16	27-Jul-24	12-Aug-24	Slab formwork		
A100080	Slab bottom pour	17	13-Aug-24	29-Aug-24	Slab bottom pour		
A100090	Slab top pour	9	30-Aug-24	07-Sep-24	Slab top pour		
A100100	Concrete curing	13	09-Sep-24	23-Sep-24	Concrete curing		
E&M works		27	09-Sep-24	08-Oct-24			
A100009	E&M works	27	09-Sep-24	08-Oct-24	E&M works		
Essential Criteria for FSI		143	25-Jul-24	27-Dec-24			
Power Egerization		143	25-Jul-24	27-Dec-24			
A229449470	CLP Rm - ABWF works	20	25-Jul-24*	14-Aug-24	CLP Rm - ABWF works		
A4001	CLP Rm - E&M works & CLP Pre-inspection	40	15-Aug-24	26-Sep-24	CLP Rm - E&M works & CLP Pre-inspection		
A4010	CLP Final Inspection / CLP Tx Rm - Handover to CLP	0		08-Oct-24	◆ CLP Final Inspection / CLP Tx Rm - Handover to CLP		
A4019	CLP Mobilization	27	09-Oct-24	06-Nov-24			
A4009	Available SO2 access for CLP	73	09-Oct-24	27-Dec-24			
Dangerous Goods Licenses		103	01-Aug-24	20-Nov-24			
A10070	Fuel Tank Room - ABWF works	13	01-Aug-24*	14-Aug-24	Fuel Tank Room - ABWF works		
A8000	Emergency Generator Room - ABWF works	13	15-Aug-24	28-Aug-24	Emergency Generator Room - ABWF works		
A8001	EVB - Generator delivery on site (TBC)	0		23-Sep-24	◆ EVB - Generator delivery on site (TBC)		
A10080	EVB - Oil Tank delivery on site (TBC)	0		23-Sep-24	◆ EVB - Oil Tank delivery on site (TBC)		
A10090	Waiting Period	7	24-Sep-24	30-Sep-24	Waiting Period		
A10100	FSD on-site Inspection	7	02-Oct-24	08-Oct-24	FSD on-site Inspection		
A10110	Oil Tank Installation and T&C	27	09-Oct-24	06-Nov-24			
A8010	Generator Installation	40	09-Oct-24	20-Nov-24			
Fireman Lift		67	29-Aug-24	11-Nov-24			
Lift Installation (by OTIS)		67	29-Aug-24	11-Nov-24			
A100145	Setting out and preparation work	3	29-Aug-24*	31-Aug-24	Setting out and preparation work		
A100150	Guide Rail Installation	7	02-Sep-24	07-Sep-24	Guide Rail Installation		
A100151	Machine & Controller Installation	7	09-Sep-24	14-Sep-24	Machine & Controller Installation		
A100160	Landing Door Builder's Work Modification	22	16-Sep-24	10-Oct-24	Landing Door Builder's Work Modification		
A100161	Pit Equipment installation	7	12-Oct-24	18-Oct-24	Pit Equipment installation		
A100170	Car Cage & CWT Frame Assembly	11	19-Oct-24*	30-Oct-24	Ca		
A100190	Electrical Installation	11	30-Oct-24	11-Nov-24			
FS Water Supply		78	13-Sep-24	06-Dec-24			
A6003	Watermain Installation	78	13-Sep-24*	06-Dec-24			
11 E&M Installation		207	02-Jun-24	25-Dec-24			
Eastbound TSS before CP21		195	02-Jun-24	13-Dec-24			

- ◆ Milestones
- Planned Bar
- Actual Bar

ED/2018/04 Trunk Road T2 and Infrastructure Works
for Developments at South Apron

Three Months Rolling Programme (Aug24 - Oct24)

Date	Revision	Checked	Approved
------	----------	---------	----------

Activity ID	Activity Name	Dur	Start	Finish	2024		
					Aug	Sep	Oct
E&M1050	EB TSS - CP16-21 E&M installation	90	02-Jun-24	30-Aug-24	EB TSS - CP16-21 E&M installation		
E&M1070	EB TSS - CP21-22 E&M installation	90	17-Jul-24	14-Oct-24	EB TSS - CP21-22 E&M installation		
E&M1010	EB TSS - CP7-11 E&M installation	90	15-Sep-24*	13-Dec-24	EB TSS - CP7-11 E&M installation		
Westbound TSS before CP21		90	27-Sep-24	25-Dec-24	Westbound TSS before CP21		
E&M1020	WB TSS - CP11-16 E&M installation	90	27-Sep-24	25-Dec-24	WB TSS - CP11-16 E&M installation		

- ◆ Milestones
- █ Planned Bar
- █ Actual Bar

ED/2018/04 Trunk Road T2 and Infrastructure Works
for Developments at South Apron
Three Months Rolling Programme (Aug24 - Oct24)

Date	Revision	Checked	Approved

Activity ID	Activity Name	Dur	Start	Finish	2024		
					Sep	Oct	Nov
HKT2 P65Bis Programme DD 01Sep24							
Construction							
Trunk Road T2							
01 West Ventilation Building - WVB							
WVB - Essential Criteria for FSI							
WVB1750	WVB - FSI	7	01-Sep-24	07-Sep-24	WVB - FSI		
WVB - Remaining works after FSI							
External Works							
WVB1780	WVB - External Drainage (EVA side)	30	01-Oct-24*	30-Oct-24	WVB - External Drainage (EVA side)		
WVB1820	WVB - External Drainage (KFR side)	45	31-Oct-24	14-Dec-24			
WVB1810	WVB - Remaining External works	120	01-Oct-24	28-Jan-25			
Architectural Finishes							
WVB1790	WVB - Fins & Cladding (DPR side)	30	01-Oct-24*	30-Oct-24	WVB - Fins & Cladding (DPR side)		
WVB1800	WVB - Fins & Cladding (EVA side)	30	31-Oct-24	29-Nov-24			
WVB1830	WVB - Remaining Architecture works	135	01-Oct-24	12-Feb-25			
02 At-Grade Road - AGR							
Kiosk							
AGR1030	Kiosk - fabrication & delivery	97	16-Sep-24*	31-Dec-24	Kiosk - fabrication & delivery		
AGR - Road & Drainage works							
AGR1021	AGR - TCSS Provision CH5860-5962	40	07-Nov-24	18-Dec-24			
AGR1050	AGR - WB Road Side Barrier	60	07-Nov-24	05-Jan-25			
AGR1040	AGR - EB Drainage & Gully Installation	54	07-Nov-24	06-Jan-25			
03 Depressed Road - DPR							
DPR - Road works							
Temporary Platform Removal							
DPR10000	DPR - Temporary Platform removal	45	30-Sep-24*	13-Nov-24	DPR - Temporary Platform removal		
Street Furniture							
DPR10020	DPR - EB Road Barrier	50	14-Nov-24	02-Jan-25			
DPR10090	DPR - WB Road Barrier	50	14-Nov-24	02-Jan-25			
Rising Main							
A229449960	Rising Main Steel Tower	15	14-Nov-24	29-Nov-24			
A229449970	Rising Main Pillar Box	18	29-Nov-24	18-Dec-24			
DPR - Final Works							
GRC Panel							
DPR10040	DPR - GRC Panel installation	181	14-Nov-24	13-May-25			
05 Supporting Underground Structure - SUS							
SUS - Tunnel Structure Works							
Eastbound Structure							
EB Skin Wall							
Crown							
A229448430	EB SUS - Skin Wall - Crown Level Bay 5	8	01-Sep-24	08-Sep-24	EB SUS - Skin Wall - Crown Level Bay 5		
A229448440	EB SUS - Skin Wall - Crown Level Bay 6	8	09-Sep-24	16-Sep-24	EB SUS - Skin Wall - Crown Level Bay 6		
A229448450	EB SUS - Skin Wall - Crown Level Bay 7	8	17-Sep-24	24-Sep-24	EB SUS - Skin Wall - Crown Level Bay 7		
A229448460	EB SUS - Skin Wall - Crown Level Bay 8	8	25-Sep-24	02-Oct-24	EB SUS - Skin Wall - Crown Level Bay 8		
A229448470	EB SUS - Skin Wall - Crown Level Bay 9	8	03-Oct-24	10-Oct-24	EB SUS - Skin Wall - Crown Level Bay 9		
SUS - Tunnel Civil Works							
Eastbound TCW							
EB Fireboard							
Crown level							
A229447820	SUS - EB - Fire Board - Tunnel crown (skin wall)	6	12-Oct-24	17-Oct-24	SUS - EB - Fire Board - Tunnel crown (skin wall)		
EB E&M brackets							
A229446330	EB SUS - E&M brackets NCPS	21	01-Oct-24*	21-Oct-24	EB SUS - E&M brackets NCPS		
EB TCSS provision							
SUS10070	SUS EB - TCSS provision	24	22-Oct-24	14-Nov-24	SUS EB - TCSS provision		

- ◆ Milestones
- Planned Bar
- Actual Bar

ED/2018/04 Trunk Road T2 and Infrastructure Works
for Developments at South Apron
Three Months Rolling Programme (Sep24-Nov24)



Date	Revision	Checked	Approved

Activity ID	Activity Name	Dur	Start	Finish	2024		
					Sep	Oct	Nov
EB Road Barrier							
SUS10060	SUS EB - Road Barrier	45	22-Oct-24	05-Dec-24*			
Westbound TCW							
WB Fireboard							
Road level							
A8490	SUS - WB - Fire Board - Road Level NCPS remaining	26	02-Sep-24	28-Sep-24			
WB E&M brackets							
A229446310	WB SUS - E&M brackets NCPS	24	29-Sep-24	22-Oct-24			
WB TCSS provision							
SUS10090	SUS WB - TCSS provision	24	23-Oct-24	15-Nov-24			
WB Road Barrier							
SUS10080	SUS WB - Road Barrier	45	23-Oct-24	06-Dec-24			
06 Launching Shaft & C&C Tunnel - LSCC							
LSCC - Structure works							
Cut & Cover Tunnel							
C&C OHVD							
LSCC10215	C&C EB OHVD - Pour 2 (6m)	15	05-Oct-24	19-Oct-24			
LSCC10220	C&C EB OHVD - Pour 3 (5m)	15	20-Oct-24	03-Nov-24			
LSCC10235	C&C WB OHVD - Pour 2 (6m)	15	04-Nov-24	18-Nov-24			
LSCC10240	C&C WB OHVD - Pour 3 (5m)	15	19-Nov-24	03-Dec-24			
Launching Shaft							
Late Stitch/C&C							
LSCC10270	Late Stitch/C&C - OHVD Slab	20	05-Sep-24	24-Sep-24			
LSCC10280	Late Stitch/C&C - Above RL headwall	10	25-Sep-24	04-Oct-24			
LSCC10290	Late Stitch/C&C - Roof Slab + falsework removal	30	05-Oct-24	03-Nov-24			
LSCC10291	Late Stitch/C&C - Massfill breaking	7	04-Nov-24	10-Nov-24			
LSCC10330	Late Stitch/C&C - Base Slab to Road Slab (NCPS)	14	11-Nov-24	24-Nov-24			
LSCC10340	Late Stitch/C&C - NCPS Walls + Formwork removal	13	25-Nov-24	07-Dec-24			
Late Stitch/TSS							
LSCC10260	Late Stitch/TSS - Above RL headwall (63m3)	28	01-Sep-24	28-Sep-24			
LSCC10261	Falsework removal	7	29-Sep-24	05-Oct-24			
LSCC10271	Removal and Erection of Temporary steel deck	14	06-Oct-24	19-Oct-24			
LSCC10300	Late Stitch/TSS - BRL slab - Drilling & exposing coupler (1200nos)	18	20-Oct-24	06-Nov-24			
LSCC10310	Late Stitch/TSS - BRL slab - Rebar fixing	12	07-Nov-24	18-Nov-24			
LSCC10320	Late Stitch/TSS - BRL slab - Curved formwork	12	19-Nov-24	30-Nov-24			
LS - Miscellaneous Structural Openings							
A229448610	Temporary cable procurement 4mth lead time (TBC)	98	01-Sep-24*	07-Dec-24			
05 RC works at MMEP Opening for Service Galleries Works (subject to BYME 8							
A229448650	Stage 1 - Narrow the opening to 3.5m*2m RC works	28	01-Nov-24*	28-Nov-24			
A229449020	Stage 1a - Emergency staircase corridor RC works	21	29-Nov-24	19-Dec-24			
LSCC - Backfilling & Dwall Dismantling							
A229447770	Stage 2a subject to RC completion (from -10.5mPD to +1.0mPD)	150	20-Sep-24*	16-Feb-25			
07 Tunnel Sub-sea (TSS)							
Tunnel Advance Excavation - D&Br from CKL							
CKL1022	WB CKL - Pretunnel invert breaking (21m remaining) 1m per day	23	01-Sep-24	23-Sep-24			
CKL1030	WB CKL - Demo at Pre-tunnel	7	24-Sep-24	30-Sep-24			
CKL1045	WB CKL - Additional excavation at Bulkhead location	31	01-Oct-24	31-Oct-24			
CKL1090	WB - Big Bulkhead wall rebuild	45	01-Nov-24*	15-Dec-24			
Tunnel Excavation - TBM from Kai Tak							
Eastbound (EB) - TBM S1282							
TBM Tunnelling							
CP26-30							
EBTBM1260	EB TBM Tunnelling CH8632-8675 (Seawall section)	26	15-Sep-24	10-Oct-24			
EBTBM1270	EB TBM Tunnelling CH8675-8748 (Seawall section)	43	11-Oct-24	22-Nov-24			
EBTBM1280	EB TBM Tunnelling CH8748-8775 (Pilot TBM Section)	10	23-Nov-24	02-Dec-24			

- ◆ Milestones
- Planned Bar
- Actual Bar

ED/2018/04 Trunk Road T2 and Infrastructure Works
for Developments at South Apron
Three Months Rolling Programme (Sep24-Nov24)



Date	Revision	Checked	Approved

Activity ID	Activity Name	Dur	Start	Finish	2024		
					Sep	Oct	Nov
Westbound (WB) - TBM S1281							
TBM Tunneling							
CP26-31							
A2294495611	WB TBM Tunnelling CH878750-8776 (Seawall section)	16	01-Sep-24*	16-Sep-24	WB TBM Tunnelling CH878750-8776 (Seawall section)		
A229449562	WB TBM Tunnelling CH8776-8875 (Pilot tunnel section)	38	17-Sep-24	24-Oct-24	WB TBM Tunnelling CH8776-8875 (Pilot tunnel section)		
A229449563	WB TBM Tunnelling CH8854-8975 (Pilot tunnel section)	39	25-Oct-24	02-Dec-24			
Tunnel Civil Works before TBM breakthrough							
Eastbound (EB)							
Temporary Services							
TBM slurry pipe relocation							
A229447660	TSS - EB NCPS Wall Pipe Relocation from CP21 to CP22	7	01-Sep-24*	07-Sep-24	TSS - EB NCPS Wall Pipe Relocation from CP21 to CP22		
A229447670	TSS - EB NCPS Wall Pipe Relocation from CP22 to CP23	7	08-Sep-24	14-Sep-24	TSS - EB NCPS Wall Pipe Relocation from CP22 to CP23		
A229447680	TSS - EB NCPS Wall Pipe Relocation from CP23 to CP24	7	22-Nov-24	29-Nov-24			
Service Gallery							
CP21-26							
A229428552	EB TSS - Service Gallery up to CP 25	14	11-Oct-24	26-Oct-24	EB TSS - Service Gallery up to CP 25		
Below Road Level Installation							
FSIRoom							
FSIRoom 3 @ CP14							
A229450010	EB TSS - FSI Room 3 - civil works (completed)	21	01-Sep-24	21-Sep-24	EB TSS - FSI Room 3 - civil works (completed)		
FSIRoom 5 @ CP16							
A229450000	EB TSS - FSI Room 5 - civil works (completed)	21	01-Sep-24	21-Sep-24	EB TSS - FSI Room 5 - civil works (completed)		
FSIRoom 7 @ CP21							
A229449990	EB TSS - FSI Room 7 - civil works (completed)	21	01-Sep-24	21-Sep-24	EB TSS - FSI Room 7 - civil works (completed)		
Low Point @ CP12							
TC11320	EB TSS - Low Point Sump Pit - RC works (completed)	28	01-Sep-24	28-Sep-24	EB TSS - Low Point Sump Pit - RC works (completed)		
TC11330	EB TSS - Low Point Sump Pit waterproofing & testing (after TBM c	28	01-Sep-24	28-Sep-24	EB TSS - Low Point Sump Pit waterproofing & testing (after TBM dismantling)		
Corbel							
CP21-26							
A229415952	EB TSS - Corbel Structure up to CP24	9	28-Sep-24	11-Oct-24	EB TSS - Corbel Structure up to CP24		
Fire Board - Road level							
A229447570	EB TSS - Fire Board - Wall NCPS up to CP22	34	02-Sep-24	09-Oct-24	EB TSS - Fire Board - Wall NCPS up to CP22		
Road Barrier							
NCPS							
TC10140	EB TSS - Road Barrier NCPS from CP21 to CP22	8	08-Sep-24	15-Sep-24	EB TSS - Road Barrier NCPS from CP21 to CP22		
TC10150	EB TSS - Road Barrier NCPS from CP22 to CP23	8	16-Sep-24	23-Sep-24	EB TSS - Road Barrier NCPS from CP22 to CP23		
TC10160	EB TSS - Road Barrier NCPS up to CP24	8	29-Nov-24	07-Dec-24			
E&M Brackets							
NCPS							
A22180	EB TSS - E&M Brackets NCPS up to CP22	81	02-Sep-24*	28-Nov-24	EB TSS - E&M Brackets NCPS up to CP22		
Westbound (WB)							
Temporary Services							
TBM slurry pipe relocation							
A229447540	TSS - WB NCPS Wall Pipe Relocation from CP23 to CP24	7	22-Nov-24	29-Nov-24			
Service Gallery							
CP21-26							
A229445900	WB TSS - Service Gallery up to CP 26	12	17-Sep-24	28-Sep-24	WB TSS - Service Gallery up to CP 26		
CP26-31							
A229424680	WB TSS - Service Gallery up to CP 27	8	25-Oct-24	01-Nov-24	WB TSS - Service Gallery up to CP 27		
Below Road Level Installation							
Low Point @ CP12							
TC11340	WB TSS - Low Point Sump Pit - RC works (completed)	28	01-Sep-24	28-Sep-24	WB TSS - Low Point Sump Pit - RC works (completed)		
FSIRoom							
FSIRoom 2 @ CP14							
TC11350	EB TSS - FSI Room 2 - civil works (completed)	21	01-Sep-24	21-Sep-24	EB TSS - FSI Room 2 - civil works (completed)		
FSIRoom 4 @ CP16							

- ◆ Milestones
- Planned Bar
- Actual Bar

ED/2018/04 Trunk Road T2 and Infrastructure Works
for Developments at South Apron
Three Months Rolling Programme (Sep24-Nov24)



Date	Revision	Checked	Approved

Activity ID	Activity Name	Dur	Start	Finish	2024		
					Sep	Oct	Nov
TC11360	EB TSS - FSI Room 4 - civil works (completed)	21	01-Sep-24	21-Sep-24	EB TSS - FSI Room 4 - civil works (completed)		
FSI Room 6 @ CP21		21	01-Sep-24	21-Sep-24			
TC11370	EB TSS - FSI Room 6 - civil works (completed)	21	01-Sep-24	21-Sep-24	EB TSS - FSI Room 6 - civil works (completed)		
FSI Room 8 @ CP25		21	29-Sep-24	19-Oct-24			
A229450020	EB TSS - FSI Room 8 - civil works	21	29-Sep-24	19-Oct-24	EB TSS - FSI Room 8 - civil works		
Corbel		87	01-Sep-24	26-Nov-24			
CP21-26		87	01-Sep-24	26-Nov-24			
TC11200	WB TSS - Corbel Structure & Curing up to CH8850	15	01-Sep-24	15-Sep-24	WB TSS - Corbel Structure & Curing up to CH8850		
A229415231	WB TSS - Corbel Structure & Curing up to CP25	15	02-Sep-24	17-Sep-24	WB TSS - Corbel Structure & Curing up to CP25		
A229415232	WB TSS - Corbel Structure & Curing up to CP26	15	24-Oct-24	11-Nov-24	WB TSS - Corbel Structure & Curing up to CP26		
A229415242	WB TSS - Corbel Structure & Curing up to CP27	15	11-Nov-24	26-Nov-24	WB TSS - Corbel Structure & Curing up to CP27		
OHVD		122	01-Sep-24	01-Jan-25			
CP26-30		122	01-Sep-24	01-Jan-25			
TC3180	WB - ISSG Transfer & Reassembly from EB	21	01-Sep-24	21-Sep-24	WB - ISSG Transfer & Reassembly from EB		
TC3170	WB TSS - OHVD up to CP23	4	22-Sep-24	25-Sep-24	WB TSS - OHVD up to CP23		
TC3160	WB TSS - OHVD up to CP24	4	26-Sep-24	29-Sep-24	WB TSS - OHVD up to CP24		
TC3120	WB TSS - OHVD up to CP25	4	30-Sep-24	03-Oct-24	WB TSS - OHVD up to CP25		
TC3130	WB TSS - OHVD up to CP26	4	11-Nov-24	15-Nov-24	WB TSS - OHVD up to CP26		
TC3140	WB TSS - OHVD up to CP27	4	26-Nov-24	30-Nov-24	WB TSS - OHVD up to CP27		
TC11260	LoE - WB Corbel Before	101	22-Sep-24	01-Jan-25	LoE - WB Corbel Before		
Fire Board - Tunnel Crown		32	01-Sep-24	02-Oct-24			
D12535	WB TSS - Fire board - Tunnel Crown up to CP25	8	01-Sep-24	08-Sep-24	WB TSS - Fire board - Tunnel Crown up to CP25		
D12545	WB TSS - Fire board - Tunnel Crown up to CP26	8	09-Sep-24	16-Sep-24	WB TSS - Fire board - Tunnel Crown up to CP26		
D12555	WB TSS - Fire board - Tunnel Crown up to CP27	8	17-Sep-24	24-Sep-24	WB TSS - Fire board - Tunnel Crown up to CP27		
D12565	WB TSS - Fire board - Tunnel Crown up to CP28	8	25-Sep-24	02-Oct-24	WB TSS - Fire board - Tunnel Crown up to CP28		
Fire Board - Road level		79	26-Sep-24	13-Dec-24			
A229446450	WB TSS - Fire Board - Road level up to CP23	14	26-Sep-24	09-Oct-24	WB TSS - Fire Board - Road level up to CP23		
A229446460	WB TSS - Fire Board - Road level up to CP24	14	29-Nov-24	13-Dec-24	WB TSS - Fire Board - Road level up to CP24		
A229446510	CP22 to CP24	79	26-Sep-24	13-Dec-24	CP22 to CP24		
Road Barrier		108	04-Nov-24	20-Feb-25			
A229447840	WB TSS - Road Barrier CPS up to CP25	7	04-Nov-24	11-Nov-24	WB TSS - Road Barrier CPS up to CP25		
A229447850	WB TSS - Road Barrier CPS up to CP26	7	11-Nov-24	18-Nov-24	WB TSS - Road Barrier CPS up to CP26		
A229447870	24 to 26	108	04-Nov-24	20-Feb-25	24 to 26		
E&M Brackets		71	10-Oct-24	19-Dec-24			
TC11060	WB TSS - E&M Brackets up to CP23	6	10-Oct-24	15-Oct-24	WB TSS - E&M Brackets up to CP23		
TC11240	WB TSS - E&M Brackets up to CP23-CP24	71	10-Oct-24	19-Dec-24	WB TSS - E&M Brackets up to CP23-CP24		
08 CKL Tunnel		109	01-Sep-24	19-Dec-24			
Tunnel Structure before TBM breakthrough		109	01-Sep-24	19-Dec-24			
Eastbound (EB)		109	01-Sep-24	19-Dec-24			
EB Type C		109	01-Sep-24	19-Dec-24			
Lining		27	01-Sep-24	27-Sep-24			
A229449810	EB Type C1&C2 - Crown Bay 24	9	01-Sep-24	09-Sep-24	EB Type C1&C2 - Crown Bay 24		
A229449820	EB Type C1&C2 - Crown Formwork Dismantling	18	10-Sep-24	27-Sep-24	EB Type C1&C2 - Crown Formwork Dismantling		
OHVD		79	25-Sep-24	19-Dec-24			
A2041	EB Type C - OHVD (16 bays @6m, 4d/bay + 30d formwork ass. &	79	25-Sep-24	19-Dec-24	EB Type C - OHVD (16 bays @6m, 4d/bay + 30d formwork ass. &		
EB Type AD&Br		14	11-Sep-24	24-Sep-24			
OHVD		14	11-Sep-24	24-Sep-24			
A1790	EB - A1 OHVD Traveler modification to C1 OHVD Traveler	14	11-Sep-24	24-Sep-24	EB - A1 OHVD Traveler modification to C1 OHVD Traveler		
Tunnel Civil Works before TBM breakthrough		40	02-Sep-24	19-Oct-24			
Eastbound (EB)		40	02-Sep-24	19-Oct-24			
EB Type AD&Br		40	02-Sep-24	19-Oct-24			
MIMEP		40	02-Sep-24	19-Oct-24			
A229444700	EB Type A Dr&BI - MIMEP module installation	40	02-Sep-24	19-Oct-24	EB Type A Dr&BI - MIMEP module installation		
09 Cross Passages		133	01-Sep-24	11-Jan-25			
Cross Passages @ TSS (CP7 to CP29)		73	29-Sep-24	10-Dec-24			

- ◆ Milestones
- Planned Bar
- Actual Bar

ED/2018/04 Trunk Road T2 and Infrastructure Works
for Developments at South Apron
Three Months Rolling Programme (Sep24-Nov24)



Date	Revision	Checked	Approved

Activity ID	Activity Name	Dur	Start	Finish	2024		
					Sep	Oct	Nov
CP25 to CP29							
CP25							
TD0100	CP25 - EB - Tympanum Civil works CH8489	27	26-Oct-24	22-Nov-24			CP25 - EB - Tympanum Civil works CH8489
A7950	CP25 - CP TBM cycle	18	22-Nov-24	10-Dec-24			
CP26							
TD0210	CP26 - WB - Tympanum Civil works CH8588	27	29-Sep-24	25-Oct-24			CP26 - WB - Tympanum Civil works CH8588
Cross Passages @ CKL Tunnel (CP30 to CP33)							
10 East Ventilation Building - EVB							
Structure Works							
LG2/F OHVD Slab							
EVB1290	EVB - RC works (LG2/F; OHVD S5)	24	15-Sep-24	08-Oct-24			EVB - RC works (LG2/F; OHVD S5)
G/F Walls & R/F Slab							
EVB1260	EVB - RC works (R/F slab - S5)	7	18-Sep-24	24-Sep-24			EVB - RC works (R/F slab - S5)
EVB1280	EVB - Removal of Tower Crane TC1 (*scheduled on 02Oct24)	4	02-Oct-24*	05-Oct-24			EVB - Removal of Tower Crane TC1 (*scheduled on 02Oct24)
R/F Walls & UR/F Slab							
EVB1480	EVB - RC works (R/F wall & UR/F slab)	117	06-Oct-24	30-Jan-25			
ABWF Works							
Door & Louvre installation							
EVB1510	EVB - Door installation	107	01-Nov-24*	15-Feb-25			
EVB1530	EVB - Louvre installation	145	15-Oct-24*	08-Mar-25			
Footbridge FB03							
EVB1380	FB-03 - Bridge Deck Delivery & Assembly (subject to Footing read	36	02-Oct-24	09-Nov-24			FB-03 - Bridge Deck Delivery & Assembly (subject to Footing read
EVB1420	FB-03 - Steel Bridge Installation	6	09-Nov-24	15-Nov-24			FB-03 - Steel Bridge Installation
Potential VO							
EVB1320	Potential VO (subject to confirmation from HMJV)	0	01-Sep-24	01-Sep-24			Potential VO (subject to confirmation from HMJV)
EVB1590	Potential VO - Preparation	12	01-Sep-24	12-Sep-24			Potential VO - Preparation
EVB1640	Footing construction + Bearing installation	36	13-Sep-24	18-Oct-24			Footing construction + Bearing installation
Statutory Procedures							
GBP & VAC submission							
EVB1570	GBP Final amendment submission & approval	48	16-Sep-24*	08-Nov-24			GBP Final amendment submission & approval
EVB1580	VAC submission & 3 mth approval period by FSD	82	08-Nov-24	08-Feb-25			
Power Egerization							
EVB1390	CLP Installation & T&C	83	16-Sep-24	14-Dec-24			
Dangerous Goods Licenses							
EVB1310	Oil Tank & Genset Delivery and Installation	48	14-Sep-24	07-Nov-24			Oil Tank & Genset Delivery and Installation
EVB1330	DG Licenses inspection	36	07-Nov-24	13-Dec-24			
Lift Installation							
EVB1370	Lift Shaft - Lift Installation	80	05-Sep-24	30-Nov-24			
FS Water Supply							
EVB1410	EVB - Final Watermain installation after given full access	24	27-Nov-24	20-Dec-24			
11 Tunnel E&M Installation							
E&M - Cabling works							
SUS to CKL							
Eastbound							
E&MC1050	EB TSS - CP7-11 - E&M installation	90	15-Sep-24*	13-Dec-24			
E&MC1080	EB TSS - CP11-16 E&M installation	90	30-Oct-24*	27-Jan-25			
E&MC1010	EB SUS - E&M Installation	120	22-Oct-24	18-Feb-25			
Westbound							
E&MC1060	WB TSS - CP11-16 E&M installation	90	27-Sep-24	25-Dec-24			
E&MC1070	WB TSS - CP16-21 E&M installation	90	11-Nov-24	08-Feb-25			
E&MC1030	WB SUS - E&M Installation	120	23-Oct-24	19-Feb-25			
12 Projectwide TCSS Installation							
Eastbound							
TE160	EB - TCSS Installation concurrent with E&M installation	341	15-Sep-24	21-Aug-25			

- ◆ Milestones
- Planned Bar
- Actual Bar



Activity ID	Activity Name	Dur	Start	Finish	2024		
					Sep	Oct	Nov
14 Projectwide Final Works							
Tunnel Cladding (VE Panel)							
Westbound							
Typical Subframe & Niche							
VE10060	VE Panel - Subframe - WB TSS CP7-11 CPS & NCPS	21	26-Nov-24*	16-Dec-24			
Infrastructure Works							
03 Hoi Bun Road / Cheung Yip Street / Wang Chiu Road Junction							
Landscape Softworks (KD-28)							
A229428222	KD-28 - Completion of Section 9F	0	02-Sep-24	02-Sep-24*	◆ KD-28 - Completion of Section 9F		
05 Common Utility Enclosure (CUE) (KD-39)							
CUE at L10(N)							
CUE ABWF works							
CUE10480	Firedoor	12	16-Sep-24	28-Sep-24			
CUE10480	Firedoor	12	16-Sep-24	28-Sep-24			
VO - Plantroom for CUE Sprinkler System							
Power Energization							
CUE10411	Power Energization	0	05-Sep-24	05-Sep-24			
CUE10510	T&C	24	06-Sep-24	03-Oct-24			
Water Supply for Sprinkler System							
CUE10370	WWO 46 Part IV application & inspection	12	02-Sep-24	13-Sep-24			
CUE10430	Water Sampling Test (by WSD)	4	13-Sep-24	19-Sep-24			
CUE10470	Watermeter Installation (by WSD)	2	19-Sep-24	21-Sep-24			
Overall T&C and FSI							
CUE10520	FS314/501 Submission	0	21-Sep-24	21-Sep-24*			
CUE10530	Waiting Period	12	21-Sep-24	04-Oct-24			
CUE10550	CUE FSI	6	05-Oct-24	10-Oct-24			
CUE10560	KD-39 - Completion of Section 13 - Ready for commissioning of Cl	0	24-Oct-24	24-Oct-24			
CUE10551	Waiting Period for Issuance of Certificate	12	12-Oct-24	24-Oct-24			
06 Road S20							
VO - Charging Station Run-in							
A229447410	Pavement and Finishing	16	16-Sep-24	01-Oct-24			
A229447410	Pavement and Finishing	16	16-Sep-24	01-Oct-24			
VO - KFR Watermain modification							
A229448970	Footpath - Backfilling	7	15-Sep-24	21-Sep-24			
A229448980	Carriageway - ELS (10m)	21	01-Sep-24	21-Sep-24			
A229448990	Carriageway - pipe installation (10m)	7	22-Sep-24	28-Sep-24			
A229449000	T&C and connection	14	29-Sep-24	12-Oct-24			
A229449010	Reinstatement	7	13-Oct-24	19-Oct-24			
07 Road L10(N)							
L10(N) Landscape (KD-26)							
LN10110	L10(N) - Landscape softwork (TBC)	29	01-Nov-24	30-Nov-24			
LN10110	L10(N) - Landscape softwork (TBC)	29	01-Nov-24	30-Nov-24			
L10(N) Remaining works							
LN10100	Road L10N - Drainage T&C	21	13-Oct-24	02-Nov-24			
LN10130	Road L10N - Street furniture & road signage	61	01-Nov-24	31-Dec-24			
08 Road L10(S) & L18							
L10(S) & L18 Landscape (KD-24)							
A229445711	KD-24 - Completion of Section 9B - Remaining Stage 5 Infrastruct	0	31-Oct-24	31-Oct-24			
A229445710	L10 (S) & L18 - Landscape softwork (TBC)	28	02-Oct-24*	31-Oct-24			
A229445710	L10 (S) & L18 - Landscape softwork (TBC)	28	02-Oct-24*	31-Oct-24			
L10(S) & L18 Remaining works							
Miscellaneous road works							
A229448740	Street furniture & road signage	61	01-Sep-24*	31-Oct-24			
A229448760	L10 (S) & L18 - Road Lighting	60	01-Oct-24*	29-Nov-24			
Preparation for road opening							
A229448670	NAH Sewage Tapping Replacement Work - Part 1	21	01-Sep-24*	21-Sep-24			
A229448680	NAH Sewage Tapping Replacement Work - Part 2	21	22-Sep-24	12-Oct-24			
A229448690	NAH Sewage Tapping Replacement Work - Part 3	21	13-Oct-24	02-Nov-24			

- ◆ Milestones
- Planned Bar
- Actual Bar

ED/2018/04 Trunk Road T2 and Infrastructure Works
for Developments at South Apron
Three Months Rolling Programme (Sep24-Nov24)



Date	Revision	Checked	Approved
------	----------	---------	----------

Activity ID	Activity Name	Dur	Start	Finish	2024		
					Sep	Oct	Nov
A229448700	NAH Sewage Tapping Replacement Work - Part 4	21	03-Nov-24	23-Nov-24			 NAH Sewage
A229448710	L10 (S) & L18 - Footpath reinstatement	14	24-Nov-24	07-Dec-24			
Roadside Area adjacent to L10(S)		30	31-Oct-24	30-Nov-24			
Design		0	31-Oct-24	31-Oct-24			
A229448780	Design Approval - Western Portal (168000)	0		31-Oct-24			◆ Design Approval - Western Portal (168000)
A229448790	Design Approval - Roadworks (079000)	0		31-Oct-24			◆ Design Approval - Roadworks (079000)
Roadworks		30	01-Nov-24	30-Nov-24			
A229448810	Roadside Area adjacent to L10S - Road works	30	01-Nov-24*	30-Nov-24			
09 Footbridge FB-02 (KD-17 achieved)		77	15-Sep-24	30-Nov-24			
FB-02 Remaining works		77	15-Sep-24	30-Nov-24			
FB211090	Planter Drainboard delivery on site	0	01-Oct-24*				◆ Planter Drainboard delivery on site
FB211100	Planter Drainboard installation	14	01-Oct-24*	14-Oct-24			Planter Drainboard installation
FB211110	Soft landscape	28	15-Oct-24	11-Nov-24			Soft landscape
FB211080	HyD VO - Drainage Enhancement	60	15-Sep-24*	13-Nov-24			HyD VO - Drainage Enhancement
KF64 reinstatement		30	01-Nov-24	30-Nov-24			
FB211120	KF64 reinstatement - Canopy	30	01-Nov-24*	30-Nov-24			

- ◆ Milestones
-  Planned Bar
-  Actual Bar



Date	Revision	Checked	Approved

Activity ID	Activity Name	Original Duration	Early Start	Early Finish	Late Start	Late Finish	Actual Start	Actual Finish	Predecessor Details	2024			
										Aug 32	Sep 33	Oct 34	Nov 35
Trunk Road T2 - Traffic Control & Surveillance System & Associated Works		573	01-Sep-24	11-Aug-25	01-Nov-23	02-Feb-27	01-Mar-23						
Access Dates		67	01-Sep-24	07-Nov-24	01-Jun-24	26-Apr-25							
AC1000	Portion 1 - South Apron Up to SUS	0	01-Sep-24		12-Jun-24								
AC1020	Portion 3 - CKL Branch Tunnel in TKO-LTT Site	0	01-Sep-24		11-Jan-25								
AC1030	Portion 4 - TKO-LTT (LT Interchange)	0	01-Sep-24		01-Jun-24								
AC1040	Underpass S21	0	01-Sep-24		26-Apr-25								
AC1050	Portion 2 - LS - CKL Tunnel CH 6+568 to CH 7+100	0	01-Sep-24		23-Aug-24								
AC1060	Portion 2 - LS - CKL Tunnel CH 7+100 to CH 7+600	0	01-Sep-24		23-Aug-24								
AC1070	Portion 2 - LS - CKL Tunnel CH 7+600 to CH 8+100	0	01-Sep-24		23-Aug-24								
AC1080	Portion 2 - LS - CKL Tunnel CH 8+100 to CH 8+750	0	01-Sep-24		04-Oct-24								
AC1090	Portion 2 - LS - CKL Tunnel CH 8+750 to CH 9+250	0	07-Nov-24		07-Nov-24								◆
Summary by Cost Center		458	01-Sep-24	11-Apr-25	01-Nov-23	02-Feb-27	01-Mar-23						
Cost Center B - Central System		134	02-Sep-24	10-Jan-25	23-Oct-24	11-Apr-25	06-Jul-24						
SC1070	SCT Plan Submission & Approval for Central System	84	02-Sep-24	14-Oct-24	14-Mar-25	14-Mar-25	06-Jul-24		DS2940: SS				
SC1090	SAT Plan Submission & Approval for Central System	78	02-Sep-24	04-Dec-24	07-Jan-25	11-Apr-25			DS3500: SS				
SC1080	Site Installation of Central System	84	02-Oct-24	10-Jan-25	23-Oct-24	17-Feb-25			SW1100: SS, SW1120: SS, SW1960: SS, SW1090: SS, SW1670: SS, SW1770: SS				
Cost Center C - Traffic Control Devices		377	01-Sep-24	11-Feb-25	30-Aug-24	11-Apr-25	31-Aug-23						
SC1150	Installation Drawing Preparation, Submission & Approval for Traffic Control Devices	72	02-Sep-24	27-Sep-24	30-Aug-24	30-Aug-24	31-Aug-23		DS5890: SS				
SC1190	Equipment Manufacturing & Delivery for Traffic Control Devices	135	01-Sep-24	30-Dec-24	10-Dec-24	10-Dec-24	16-Sep-23		EM1320: SS				
SC1200	SCT Plan Submission & Approval for Traffic Control Devices	84	02-Oct-24	10-Jan-25	12-Nov-24	22-Feb-25			DS2980: SS				
SC1220	SAT Plan Submission & Approval for Traffic Control Devices	84	31-Oct-24	11-Feb-25	30-Dec-24	11-Apr-25			DS3540: SS				
Cost Center D - Communication System		204	02-Sep-24	05-Feb-25	07-Oct-24	14-Mar-25	22-Apr-24						
SC1280	Installation Drawing Preparation, Submission & Approval for Communication System	60	02-Sep-24	02-Sep-24	07-Oct-24	07-Oct-24	22-Apr-24		DS5930: SS				
SC1340	SCT Plan Submission & Approval for Communication System	84	02-Sep-24	11-Dec-24	24-Oct-24	14-Mar-25			DS3020: SS				
SC1350	SAT Plan Submission & Approval for Communication System	80	16-Sep-24	20-Dec-24	07-Nov-24	13-Feb-25			DS3580: SS				
SC1330	Site Installation of Communication System	69	12-Nov-24	05-Feb-25	23-Oct-24	17-Feb-25			SW1100: SS, SW1120: SS, SW1960: SS				
Cost Center E - CCTV System		383	02-Sep-24	09-Jan-25	25-Sep-24	02-Feb-27	01-Mar-23						
SC1410	Installation Drawing Preparation, Submission & Approval for CCTV System	99	02-Sep-24	27-Sep-24	02-Feb-27	02-Feb-27	01-Mar-23		DS5970: SS				
SC1430	FAT Plan Submission & Approval for CCTV System	72					13-Dec-23	31-Jul-24	DS4050: SS				
SC1460	SCT Plan Submission & Approval for CCTV System	84	02-Sep-24	14-Oct-24	03-Feb-25	03-Feb-25	24-Jun-24		DS3060: SS				
SC1480	SAT Plan Submission & Approval for CCTV System	84	02-Sep-24	11-Dec-24	24-Dec-24	07-Apr-25			DS3620: SS				
SC1470	Site Installation of CCTV System	61	29-Oct-24	09-Jan-25	25-Sep-24	12-Mar-25			SW1060: SS, SW1940: SS				
Cost Center F - PABX System		389	02-Sep-24	16-Jan-25	13-Dec-24	26-Jul-25	27-Jul-23						
SC1560	Installation Drawing Preparation, Submission & Approval for PABX System	68	02-Sep-24	27-Sep-24	13-Dec-24	13-Dec-24	27-Jul-23		DS6010: SS				
SC1600	SCT Plan Submission & Approval for PABX System	84	02-Sep-24	14-Oct-24	07-Apr-25	07-Apr-25	28-Jun-24		DS3100: SS				
SC1610	SAT Plan Submission & Approval for PABX System	84	23-Sep-24	02-Jan-25	16-Apr-25	26-Jul-25			DS3660: SS				
SC1590	Site Installation of PABX System	89	02-Oct-24	16-Jan-25	06-Jan-25	07-Apr-25			SW2380: SS				
Cost Center G - ET System		144	02-Sep-24	25-Feb-25	12-Nov-24	07-May-25							
SC1730	SCT Plan Submission & Approval for ET System	84	02-Sep-24	11-Dec-24	12-Nov-24	08-Mar-25			DS3140: SS				
SC1740	SAT Plan Submission & Approval for ET System	84	14-Nov-24	25-Feb-25	23-Jan-25	07-May-25			DS3700: SS				
Cost Center H - PA System		128	02-Sep-24	02-Jan-25	06-Jan-25	12-Jul-25	11-Jun-24						
SC1850	SCT Plan Submission & Approval for PA System	84	02-Sep-24	12-Sep-24	22-Mar-25	22-Mar-25	11-Jun-24		DS3180: SS				
SC1870	SAT Plan Submission & Approval for PA System	84	05-Sep-24	14-Dec-24	01-Apr-25	12-Jul-25			DS3740: SS				



GTECH Services (Hong Kong) Limited

■ Remaining Work
 ■ Actual Work
 ■ Critical Activity
 ◆ Milestone

Date	Revision	Checked	Approved
31-Aug-24	Rev. 0	MY	

Activity ID	Activity Name	Original Duration	Early Start	Early Finish	Late Start	Late Finish	Actual Start	Actual Finish	Predecessor Details	2024			
										Aug 32	Sep 33	Oct 34	Nov 35
SC1860	Site Installation of PA System	77	02-Oct-24	02-Jan-25	06-Jan-25	22-Mar-25			SW2370: SS				
Cost Center I - Radio System		156	02-Sep-24	11-Mar-25	29-Oct-24	07-May-25							
SC1930	Installation Drawing Preparation, Submission & Approval for Radio System	60	02-Sep-24	13-Nov-24	08-Nov-24	18-Jan-25			DS6130: SS				
SC1980	SCT Plan Submission & Approval for Radio System	84	02-Sep-24	11-Dec-24	29-Oct-24	15-Mar-25			DS3220: SS				
SC1990	Site Installation of Radio System	95	02-Oct-24	23-Jan-25	06-Jan-25	21-Apr-25			SW2390: SS				
SC2000	SAT Plan Submission & Approval for Radio System	84	28-Nov-24	11-Mar-25	23-Jan-25	07-May-25			DS3780: SS				
Cost Center J - Detection System		427	01-Sep-24	11-Apr-25	01-Nov-23	02-Feb-27	24-May-23						
SC2060	Installation Drawing Preparation, Submission & Approval for Detection System	124	02-Sep-24	27-Sep-24	02-Feb-27	02-Feb-27	24-May-23		DS6170: SS				
SC2100	Equipment Manufacturing & Delivery for Detection System	90	01-Sep-24	02-Oct-24	09-Jan-25	09-Jan-25	01-Aug-23		EM1100: SS, EM1660: SS				
SC2090	FAT of Detection System	87	01-Sep-24	04-Oct-24	01-Nov-23	28-Aug-24	31-Oct-23		EM1100: FS, EM1660: FS				
SC2080	FAT Plan Submission & Approval for Detection System	66	02-Sep-24	02-Oct-24	09-Jan-25	09-Jan-25	19-Apr-24		DS4450: SS, DS8420: SS				
SC2110	SCT Plan Submission & Approval for Detection System	84	02-Sep-24	11-Dec-24	09-Sep-24	17-Jan-25			DS3260: SS				
SC2120	Site Installation of Detection System	140	24-Oct-24	11-Apr-25	05-Sep-24	12-Mar-25			SW1070: SS, SW1250: SS				
Cost Center K - Manual Fallback System		259	01-Sep-24	11-Dec-24	24-Jul-24	14-Mar-25	31-Aug-23						
SC2190	Installation Drawing Preparation, Submission & Approval for Manual Fallback System	60	02-Sep-24	27-Sep-24	05-Feb-25	05-Feb-25	31-Aug-23		DS6210: SS				
SC2250	SCT Plan Submission & Approval for Manual Fallback System	84	02-Sep-24	14-Oct-24	14-Mar-25	14-Mar-25	06-Jul-24		DS3300: SS				
SC2200	Post FAT Configuration for Manual Fallback System	90	01-Sep-24	29-Oct-24	24-Jul-24	05-Feb-25	23-Jul-24		EM1540: FS				
SC2270	SAT Plan Submission & Approval for Manual Fallback System	84	02-Sep-24	11-Dec-24	12-Nov-24	22-Feb-25			DS3860: SS				
SC2240	Site Installation of Manual Fallback System	25	30-Oct-24	27-Nov-24	06-Feb-25	05-Mar-25			EM1110: FS				
Cost Center L - Speed Enforcement System		125	02-Sep-24	03-Feb-25	30-Nov-24	07-May-25							
SC2340	Installation Drawing Preparation, Submission & Approval for Speed Enforcement System	60	02-Sep-24	13-Nov-24	17-Dec-24	01-Mar-25			DS6290: SS				
SC2370	SCT Plan Submission & Approval for Speed Enforcement System	84	02-Sep-24	11-Dec-24	30-Nov-24	22-Mar-25			DS3380: SS				
SC2380	Reliability Test Plan Submission & Approval for Speed Enforcement System	84	02-Oct-24	10-Jan-25	30-Dec-24	11-Apr-25			DS3940: SS				
SC2390	Site Installation of Speed Enforcement System	65	14-Nov-24	03-Feb-25	03-Mar-25	07-May-25			SW2330: SS				
Cost Center M - Power Distribution System		140	02-Sep-24	20-Feb-25	13-Aug-24	14-May-25							
SC2490	SCT Plan Submission & Approval for Power Distribution System	84	02-Sep-24	11-Dec-24	13-Aug-24	21-Nov-24			DS3420: SS				
SC2480	Site Installation of Power Distribution System	101	21-Oct-24	20-Feb-25	11-Mar-25	14-May-25			SW1920: SS, SW2250: SS				
Cost Center N - Government Optical Fibre System		161	02-Sep-24	11-Dec-24	16-Jan-25	28-Apr-25	22-Apr-24						
SC2550	Installation Drawing Preparation, Submission & Approval for Government Optical Fibre System	60					22-Apr-24	16-Aug-24	DS6330: SS				
SC2580	SCT Plan Submission & Approval for Government Optical Fibre System	84	02-Sep-24	11-Dec-24	16-Jan-25	28-Apr-25			DS3460: SS				
Operation Facilities		271	01-Sep-24	31-Dec-24	29-Aug-24	17-Feb-25	01-Aug-23						
SC2660	FAT of Operation Facilities	78	01-Sep-24	02-Oct-24	31-Aug-24	31-Aug-24	01-Aug-23		EM1560: SS				
SC2650	FAT Plan Submission & Approval for Operation Facilities	81	02-Sep-24	30-Sep-24	29-Aug-24	29-Aug-24	10-Jul-24		DS4600: SS				
SC2630	Installation Drawing Preparation, Submission & Approval for Operation Facilities	60	02-Sep-24	13-Nov-24	04-Dec-24	17-Feb-25			DS6250: SS				
SC2670	Equipment Manufacturing & Delivery for Operation Facilities	90	03-Oct-24	31-Dec-24	01-Sep-24	29-Nov-24			EM1550: FS				
Design & Submissions		304	02-Sep-24	30-Sep-24	02-Nov-24	25-Jun-25	29-Aug-23						
FSP Submissions (42 Working Days after Commencement of FSP)		304	02-Sep-24	30-Sep-24	02-Nov-24	25-Jun-25	29-Aug-23						
FSP Batch 1 Submission		304	02-Sep-24	30-Sep-24	02-Nov-24	25-Jun-25	29-Aug-23						
Central System		304	02-Sep-24	30-Sep-24	02-Nov-24	25-Jun-25	29-Aug-23						
Traffic Plan Review & Combine		140	02-Sep-24	30-Sep-24	02-Nov-24	29-Nov-24	28-Dec-23						
DS7300	Traffic Plan Review & Combine Workshop	140	02-Sep-24	30-Sep-24	02-Nov-24	29-Nov-24	28-Dec-23		DS1830: FS 22				
IT Security Risk Assessment Plan		30	02-Sep-24	02-Sep-24	25-Jun-25	25-Jun-25	29-Aug-23						
DS7440	Approval on IT Security Risk Assessment Plan	30	02-Sep-24	02-Sep-24	25-Jun-25	25-Jun-25	29-Aug-23		DS7430: FS				
Interface Coordination & Integration with Other Parties		99	02-Sep-24	27-Nov-24	09-Nov-26	02-Feb-27	17-May-24						
Interfacing Coordination with CKR (KTE)		73	02-Sep-24	16-Sep-24	19-Jan-27	02-Feb-27	04-Jul-24						
Detail Interfacing Management Plan (DIMP)		73	02-Sep-24	16-Sep-24	19-Jan-27	02-Feb-27	04-Jul-24						
DS6610	Prepare & Submit DIMP with CKR (KTE)	73					04-Jul-24	31-Jul-24	DS6600: FS 96				



GTECH Services (Hong Kong) Limited

■ Remaining Work
 ■ Actual Work
 ■ Critical Activity
 ◆ Milestone

Date	Revision	Checked	Approved
31-Aug-24	Rev. 0	MY	

Activity ID	Activity Name	Original Duration	Early Start	Early Finish	Late Start	Late Finish	Actual Start	Actual Finish	Predecessor Details	2024			
										Aug 32	Sep 33	Oct 34	Nov 35
DS6620	Comment on DIMP with CKR (KTE)	17					01-Aug-24	20-Aug-24	DS6610: FS				
DS6630	Resubmit DIMP with CKR (KTE)	16	02-Sep-24	07-Sep-24	19-Jan-27	25-Jan-27	21-Aug-24		DS6620: FS				
DS6640	Approval of DIMP with CKR (KTE)	7	09-Sep-24	16-Sep-24	26-Jan-27	02-Feb-27			DS6630: FS				
Interfacing Coordination with CKR (BEM)		73	02-Sep-24	16-Sep-24	19-Jan-27	02-Feb-27	04-Jul-24						
Detail Interfacing Management Plan (DIMP)		73	02-Sep-24	16-Sep-24	19-Jan-27	02-Feb-27	04-Jul-24						
DS6690	Prepare & Submit DIMP with CKR (BEM)	73					04-Jul-24	31-Jul-24	DS6600: FS 96				
DS6700	Comment on DIMP with CKR (BEM)	17					01-Aug-24	20-Aug-24	DS6690: FS				
DS6710	Resubmit DIMP with CKR (BEM)	16	02-Sep-24	07-Sep-24	19-Jan-27	25-Jan-27	21-Aug-24		DS6700: FS				
DS6720	Approval of DIMP with CKR (BEM)	7	09-Sep-24	16-Sep-24	26-Jan-27	02-Feb-27			DS6710: FS				
Interfacing Coordination with TKO-LTT (Civil)		52	02-Sep-24	02-Oct-24	05-Jan-27	02-Feb-27	17-May-24						
Detail Interfacing Management Plan (DIMP)		52	02-Sep-24	02-Oct-24	05-Jan-27	02-Feb-27	17-May-24						
DS6780	Comment on DIMP with TKO-LTT (Civil)	17	02-Sep-24	02-Sep-24	05-Jan-27	05-Jan-27	17-May-24		DS6770: FS				
DS6790	Resubmit DIMP with TKO-LTT (Civil)	16	03-Sep-24	21-Sep-24	06-Jan-27	23-Jan-27			DS6780: FS				
DS6800	Approval of DIMP with TKO-LTT (Civil)	8	23-Sep-24	02-Oct-24	25-Jan-27	02-Feb-27			DS6790: FS				
Interfacing Coordination with TKO-LTT (TCSS)		56	02-Sep-24	07-Oct-24	30-Dec-26	02-Feb-27	17-May-24						
Detail Interfacing Management Plan (DIMP)		56	02-Sep-24	07-Oct-24	30-Dec-26	02-Feb-27	17-May-24						
DS6860	Comment on DIMP with TKO-LTT (TCSS)	10	02-Sep-24	02-Sep-24	30-Dec-26	30-Dec-26	17-May-24		DS6850: FS				
DS6870	Resubmit DIMP with TKO-LTT (TCSS)	16	03-Sep-24	21-Sep-24	31-Dec-26	19-Jan-27			DS6860: FS				
DS6880	Approval of DIMP with TKO-LTT (TCSS)	12	23-Sep-24	07-Oct-24	20-Jan-27	02-Feb-27			DS6870: FS				
Interfacing Coordination with T2		72	02-Sep-24	27-Nov-24	09-Nov-26	02-Feb-27	04-Jul-24						
Preliminary Interfacing Management Plan (PIMP)		72	02-Sep-24	27-Nov-24	09-Nov-26	02-Feb-27							
DS6890	Prepare & Submit PIMP with T2	24	02-Sep-24	30-Sep-24	09-Nov-26	05-Dec-26			DS2680: FS 211				
DS6900	Comment on PIMP with T2	24	02-Oct-24	30-Oct-24	07-Dec-26	05-Jan-27			DS6890: FS				
DS6910	Resubmit PIMP with T2	12	31-Oct-24	13-Nov-24	06-Jan-27	19-Jan-27			DS6900: FS				
DS6920	Approval of PIMP with T2	12	14-Nov-24	27-Nov-24	20-Jan-27	02-Feb-27			DS6910: FS				
Detail Interfacing Management Plan (DIMP)		69	02-Sep-24	23-Sep-24	13-Jan-27	02-Feb-27	04-Jul-24						
DS6930	Prepare & Submit DIMP with T2	24					04-Jul-24	31-Jul-24	DS6920: FS				
DS6940	Comment on DIMP with T2	24					01-Aug-24	20-Aug-24	DS6930: FS				
DS6950	Resubmit DIMP with T2	12	02-Sep-24	07-Sep-24	13-Jan-27	19-Jan-27	21-Aug-24		DS6940: FS				
DS6960	Approval of DIMP with T2	12	09-Sep-24	23-Sep-24	20-Jan-27	02-Feb-27			DS6950: FS				
Drawing & Installation Method Statement Submissions		312	02-Sep-24	06-Dec-24	06-Aug-24	02-Feb-27	10-Aug-23						
Installation Drawing Submission		312	02-Sep-24	06-Dec-24	06-Aug-24	02-Feb-27	08-Sep-23						
DS2695	Prepare & Submit Schedule of Installation Drawing	30	02-Sep-24	08-Oct-24	30-Oct-26	03-Dec-26			DS1050: FS 103				
DS2705	Approval of Schedule of Installation Drawing	50	09-Oct-24	06-Dec-24	04-Dec-26	02-Feb-27			DS2695: FS				
Traffic Control Devices		252	02-Sep-24	27-Sep-24	06-Aug-24	30-Aug-24	04-May-24						
DS8240	Resubmit Installation Drawing for Traffic Control Devices	12	02-Sep-24	12-Sep-24	06-Aug-24	16-Aug-24	04-May-24		DS5920: FS				
DS8250	Approval of Installation Drawing for Traffic Control Devices	12	13-Sep-24	27-Sep-24	17-Aug-24	30-Aug-24			DS8240: FS, SC1150: FF				
Communication System		59	02-Sep-24	02-Sep-24	07-Oct-24	07-Oct-24	27-Jul-24						
DS8480	Comment on Installation Drawing for Communication System	12					27-Jul-24	06-Aug-24	DS8470: FS				
DS8570	Resubmit Installation Drawing for Communication System	12					07-Aug-24	15-Aug-24	DS8480: FS				
DS8580	Approval of Installation Drawing for Communication System	12	02-Sep-24	02-Sep-24	07-Oct-24	07-Oct-24	16-Aug-24		DS8570: FS, SC1280: FF				
CCTV System		185	02-Sep-24	27-Sep-24	08-Jan-27	02-Feb-27	13-Dec-23						
DS8020	Resubmit Installation Drawing for CCTV System	26	02-Sep-24	12-Sep-24	08-Jan-27	19-Jan-27	13-Dec-23		DS8010: FS				
DS8030	Approval of Installation Drawing for CCTV System	12	13-Sep-24	27-Sep-24	20-Jan-27	02-Feb-27			DS8020: FS, SC1410: FF				
PABX System		254	02-Sep-24	27-Sep-24	19-Nov-24	13-Dec-24	08-Sep-23						
DS6030	Resubmit Installation Drawing for PABX System	12	02-Sep-24	12-Sep-24	19-Nov-24	29-Nov-24	08-Sep-23		DS6020: FS				
DS6040	Approval of Installation Drawing for PABX System	12	13-Sep-24	27-Sep-24	30-Nov-24	13-Dec-24			DS6030: FS, SC1560: FF				
Radio System		60	02-Sep-24	13-Nov-24	08-Nov-24	18-Jan-25							
DS6130	Prepare & Submit Installation Drawing for Radio System	12	02-Sep-24	14-Sep-24	08-Nov-24	21-Nov-24			DS2154: FS				
DS6140	Comment on Installation Drawing for Radio System	24	16-Sep-24	16-Oct-24	22-Nov-24	19-Dec-24			DS6130: FS				
DS6150	Resubmit Installation Drawing for Radio System	12	17-Oct-24	30-Oct-24	20-Dec-24	04-Jan-25			DS6140: FS				
DS6160	Approval of Installation Drawing for Radio System	12	31-Oct-24	13-Nov-24	06-Jan-25	18-Jan-25			DS6150: FS, SC1930: FF				
Detection System		99	02-Sep-24	27-Sep-24	08-Jan-27	02-Feb-27	09-Dec-23						
DS8280	Resubmit Installation Drawing for Detection System	24	02-Sep-24	12-Sep-24	08-Jan-27	19-Jan-27	09-Dec-23		DS6200: FS				

Activity ID	Activity Name	Original Duration	Early Start	Early Finish	Late Start	Late Finish	Actual Start	Actual Finish	Predecessor Details	2024			
										Aug 32	Sep 33	Oct 34	Nov 35
DS8290	Approval of Installation Drawing for Detection System	12	13-Sep-24	27-Sep-24	20-Jan-27	02-Feb-27			DS8280: FS, SC2060: FF				
Manual Fallback Control System		98	02-Sep-24	27-Sep-24	08-Jan-25	05-Feb-25	04-May-24						
DS8300	Resubmit Installation Drawing for Manual Fallback Control System	12	02-Sep-24	12-Sep-24	08-Jan-25	18-Jan-25	04-May-24		DS6240: FS				
DS8310	Approval of Installation Drawing for Manual Fallback Control System	12	13-Sep-24	27-Sep-24	20-Jan-25	05-Feb-25			DS8300: FS, SC2190: FF				
Operation Facility		60	02-Sep-24	13-Nov-24	04-Dec-24	17-Feb-25							
DS6250	Prepare & Submit Installation Drawing for Operation Facility	12	02-Sep-24	14-Sep-24	04-Dec-24	17-Dec-24			DS2532: FS				
DS6260	Comment on Installation Drawing for Operation Facility	24	16-Sep-24	16-Oct-24	18-Dec-24	16-Jan-25			DS6250: FS				
DS6270	Resubmit Installation Drawing for Operation Facility	12	17-Oct-24	30-Oct-24	17-Jan-25	03-Feb-25			DS6260: FS				
DS6280	Approval of Installation Drawing for Operation Facility	12	31-Oct-24	13-Nov-24	04-Feb-25	17-Feb-25			DS6270: FS, SC2630: FF				
Speed Enforcement System		60	02-Sep-24	13-Nov-24	17-Dec-24	01-Mar-25							
DS6290	Prepare & Submit Installation Drawing for Speed Enforcement System	12	02-Sep-24	14-Sep-24	17-Dec-24	31-Dec-24			DS2472: FS				
DS6300	Comment on Installation Drawing for Speed Enforcement System	24	16-Sep-24	16-Oct-24	02-Jan-25	01-Feb-25			DS6290: FS				
DS6310	Resubmit Installation Drawing for Speed Enforcement System	12	17-Oct-24	30-Oct-24	03-Feb-25	15-Feb-25			DS6300: FS				
DS6320	Approval of Installation Drawing for Speed Enforcement System	12	31-Oct-24	13-Nov-24	17-Feb-25	01-Mar-25			DS6310: FS, SC2340: FF				
Government Optical Fibre System		49	02-Sep-24	02-Sep-24	28-Oct-24	28-Oct-24	27-Jul-24						
DS8500	Comment on Installation Drawing for Government Optical Fibre System	12					27-Jul-24	06-Aug-24	DS8490: FS				
DS8550	Resubmit Installation Drawing for Government Optical Fibre System	12					07-Aug-24	15-Aug-24	DS8500: FS				
DS8560	Approval of Installation Drawing for Government Optical Fibre System	12	02-Sep-24	02-Sep-24	28-Oct-24	28-Oct-24	16-Aug-24		DS8550: FS, SC2550: FS				
Installation Method Statement Submission		227	02-Sep-24	27-Sep-24	22-Aug-24	02-Feb-27	10-Aug-23						
Traffic Control Devices		74	02-Sep-24	10-Sep-24	22-Aug-24	30-Aug-24	29-Jun-24						
DS2800	Resubmit Installation Method Statement for Installation of TCSS Field Equipment	12					29-Jun-24	27-Aug-24	DS2790: FS				
DS2810	Approval of Installation Method Statement for Installation of TCSS Field Equipment	12	02-Sep-24	10-Sep-24	22-Aug-24	30-Aug-24	28-Aug-24		DS2800: FS				
CCTV Camera & VD Camera		74	02-Sep-24	10-Sep-24	27-Aug-24	04-Sep-24	29-Jun-24						
DS6430	Resubmit Installation Method Statement for CCTV Camera & VD Camera	12					29-Jun-24	27-Aug-24	DS6420: FS				
DS6440	Approval of Installation Method Statement for CCTV Camera & VD Camera	12	02-Sep-24	10-Sep-24	27-Aug-24	04-Sep-24	28-Aug-24		DS6430: FS				
PABX, ET & PA Systems		74	02-Sep-24	10-Sep-24	07-Dec-24	16-Dec-24	29-Jun-24						
DS6470	Resubmit Installation Method Statement for PABX, ET & PA Systems	12					29-Jun-24	27-Aug-24	DS6460: FS				
DS6480	Approval of Installation Method Statement for PABX, ET & PA Systems	12	02-Sep-24	10-Sep-24	07-Dec-24	16-Dec-24	28-Aug-24		DS6470: FS				
Radio System		75	02-Sep-24	10-Sep-24	26-Dec-24	04-Jan-25	29-Jun-24						
DS6510	Resubmit Installation Method Statement for Radio System	12					29-Jun-24	27-Aug-24	DS6500: FS				
DS6520	Approval of Installation Method Statement for Radio System	12	02-Sep-24	10-Sep-24	26-Dec-24	04-Jan-25	28-Aug-24		DS6510: FS				
Power Distribution System		226	02-Sep-24	27-Sep-24	08-Jan-27	02-Feb-27	10-Aug-23						
DS6550	Resubmit Installation Method Statement for Power Distribution System	6	02-Sep-24	12-Sep-24	08-Jan-27	19-Jan-27	10-Aug-23		DS6540: FS				
DS6560	Approval of Installation Method Statement for Power Distribution System	12	13-Sep-24	27-Sep-24	20-Jan-27	02-Feb-27			DS6550: FS				
SEC System		74	02-Sep-24	10-Sep-24	21-Feb-25	01-Mar-25	29-Jun-24						
DS7400	Resubmit Installation Method Statement for SEC System	12					29-Jun-24	27-Aug-24	DS7390: FS				
DS7410	Approval of Installation Method Statement for SEC System	12	02-Sep-24	10-Sep-24	21-Feb-25	01-Mar-25	28-Aug-24		DS7400: FS				
Detection System		74	02-Sep-24	10-Sep-24	27-Aug-24	04-Sep-24	29-Jun-24						
DS7490	Resubmit Installation Method Statement for Detection System	12					29-Jun-24	27-Aug-24	DS7480: FS				



■ Remaining Work ◆ Milestone
■ Actual Work
■ Critical Activity

Date	Revision	Checked	Approved
31-Aug-24	Rev. 0	MY	

Activity ID	Activity Name	Original Duration	Early Start	Early Finish	Late Start	Late Finish	Actual Start	Actual Finish	Predecessor Details	2024			
										Aug 32	Sep 33	Oct 34	Nov 35
DS7500	Approval of Installation Method Statement for Detection System	12	02-Sep-24	10-Sep-24	27-Aug-24	04-Sep-24	28-Aug-24		DS7490: FS				
FAT Plan Submissions, Equipment Procurement & Manufacturing		253	01-Sep-24	31-Dec-24	29-Jul-24	02-Feb-27	10-Oct-23						
CCTV System		12					27-Jul-24	31-Jul-24					
FAT Plan Submission		12					27-Jul-24	31-Jul-24					
DS8350	Approval of FAT Plan for CCTV System	12					27-Jul-24	31-Jul-24	DS8340: FS, SC1430: FF				
Traffic Control Devices		117	01-Sep-24	30-Dec-24	01-Aug-24	10-Dec-24	10-Oct-23						
Equipment FAT & Manufacturing		117	01-Sep-24	30-Dec-24	01-Aug-24	10-Dec-24	10-Oct-23						
PVMS		85	01-Sep-24	30-Dec-24	12-Aug-24	10-Dec-24	10-Oct-23						
EM1030	Post-FAT Manufacturing & Delivery of Traffic Control Devices (PVMS)	85	01-Sep-24	30-Dec-24	12-Aug-24	10-Dec-24	10-Oct-23		DS4290: FF, SC1190: FF, EM1460: FS				
LED Signage		85	01-Sep-24	30-Sep-24	01-Aug-24	30-Aug-24	12-Mar-24						
EM1650	Post-FAT Manufacturing & Delivery of Traffic Control Devices (LED Signage)	85	01-Sep-24	30-Sep-24	01-Aug-24	30-Aug-24	12-Mar-24		EM1461: FS, SC1190: FF, DS4291: FS, DS8160: FS				
Central System		1					01-Aug-24	01-Aug-24					
Equipment FAT & Manufacturing		1					01-Aug-24	01-Aug-24					
DS4340	Submit Central System FAT Test Report	1					01-Aug-24	01-Aug-24	EM1580: FS 6				
Detection System		85	02-Sep-24	12-Oct-24	29-Jul-24	18-Jan-25	06-Jun-24						
FAT Plan Submission		82	02-Sep-24	02-Oct-24	29-Jul-24	09-Jan-25	06-Jun-24						
VD & HMD		78	02-Sep-24	02-Oct-24	29-Jul-24	26-Aug-24	06-Jun-24						
DS4470	Resubmission of FAT Plan for Detection System	12					06-Jun-24	02-Aug-24	DS4460: FS				
DS4480	Comment on FAT Plan/ Workshops (System Briefing & Comment Discussion)	12					03-Aug-24	27-Aug-24	DS4470: FS				
DS8530	Resubmission of FAT Plan for Detection System	12	02-Sep-24	16-Sep-24	29-Jul-24	12-Aug-24	28-Aug-24		DS4480: FS				
DS8540	Approval of FAT Plan for Detection System	12	17-Sep-24	02-Oct-24	13-Aug-24	26-Aug-24			DS8530: FS, SC2080: FF				
OHVD		47	02-Sep-24	02-Oct-24	10-Dec-24	09-Jan-25	25-Jul-24						
DS8450	Comment on FAT Plan/ Workshops (System Briefing & Comment Discussion)	12					25-Jul-24	20-Aug-24	DS8440: FS				
DS8510	Resubmission of FAT Plan for Detection System	12					21-Aug-24	26-Aug-24	DS8450: FS				
DS8520	Approval of FAT Plan for Detection System	12	02-Sep-24	02-Oct-24	10-Dec-24	09-Jan-25	27-Aug-24		DS8510: FS, SC2080: FF				
Equipment FAT & Manufacturing		8	03-Oct-24	12-Oct-24	27-Aug-24	18-Jan-25							
VD & HMD		8	03-Oct-24	12-Oct-24	27-Aug-24	04-Sep-24							
EM1530	FAT of Detection System - VD & HMD	2	03-Oct-24	04-Oct-24	27-Aug-24	28-Aug-24			SC2090: FF, EM1100: FS, SC2100: FS, DS8540: FS				
DS4490	Submit Detection System FAT Test Report	1	12-Oct-24	12-Oct-24	04-Sep-24	04-Sep-24			EM1530: FS 6				
OHVD		8	03-Oct-24	12-Oct-24	10-Jan-25	18-Jan-25							
EM1670	FAT of Detection System - OHVD	2	03-Oct-24	04-Oct-24	10-Jan-25	11-Jan-25			EM1660: FS, SC2090: SS, SC2100: FS, DS8520: FS				
DS8460	Submit Detection System FAT Test Report	1	12-Oct-24	12-Oct-24	18-Jan-25	18-Jan-25			EM1670: FS 6				
Operation Facilities		100	02-Sep-24	31-Dec-24	02-Aug-24	29-Nov-24	10-Jul-24						
FAT Plan Submission		60	02-Sep-24	30-Sep-24	02-Aug-24	29-Aug-24	10-Jul-24						
DS4600	Submission of Operation Facility FAT Plan	24					10-Jul-24	06-Aug-24	DS2532: FS				
DS4610	Comment on FAT Plan/ Workshops (System Briefing & Comment Discussion)	24					07-Aug-24	27-Aug-24	DS4600: FS				
DS4620	Resubmission of FAT Plan for Operation Facility	12	02-Sep-24	14-Sep-24	02-Aug-24	15-Aug-24	28-Aug-24		DS4610: FS				
DS4630	Approval of FAT Plan for Operation Facility	12	16-Sep-24	30-Sep-24	16-Aug-24	29-Aug-24			DS4620: FS, SC2650: FF				
Equipment FAT & Manufacturing		76	01-Oct-24	31-Dec-24	30-Aug-24	29-Nov-24							
EM1550	FAT of Operation Facilities	2	01-Oct-24	02-Oct-24	30-Aug-24	31-Aug-24			DS4630: FS, SC2660: FF, DS7310: FS, EM1560: FS, DS7550: FS, DS7670: FS				
EM1120	Post-FAT Manufacturing & Delivery of Operation Facilities	90	03-Oct-24	31-Dec-24	01-Sep-24	29-Nov-24			EM1550: FS, DS4640: FF, SC2670: FF, DS2530: FS, DS2532: FS				
DS4640	Submit Operation Facilities FAT Test Report	1	09-Oct-24	09-Oct-24	29-Nov-24	29-Nov-24			EM1550: FS 6, DS7550: FS				
Speed Enforcement System		12	05-Sep-24	19-Sep-24	20-Jan-27	02-Feb-27							
Equipment FAT & Manufacturing		12	05-Sep-24	19-Sep-24	20-Jan-27	02-Feb-27							



■ Remaining Work ◆ Milestone
■ Actual Work
■ Critical Activity

Date	Revision	Checked	Approved
31-Aug-24	Rev. 0	MY	

Activity ID	Activity Name	Original Duration	Early Start	Early Finish	Late Start	Late Finish	Actual Start	Actual Finish	Predecessor Details	2024			
										Aug 32	Sep 33	Oct 34	Nov 35
EM1600	SEC System Bench Test	1	05-Sep-24	05-Sep-24	20-Jan-27	20-Jan-27			EM1570: FS 60, DS8370: FS 60				
DS4740	Submit SEC System Bech Test Report	1	19-Sep-24	19-Sep-24	02-Feb-27	02-Feb-27			EM1600: FS 12				
Manual Fallback Control System		74	01-Sep-24	29-Oct-24	09-Dec-24	05-Feb-25	01-Aug-24						
Equipment FAT & Manufacturing		74	01-Sep-24	29-Oct-24	09-Dec-24	05-Feb-25	01-Aug-24						
DS4790	Submit Manual Fallback Control System FAT Test Report	1					01-Aug-24	01-Aug-24	EM1540: FS 6				
EM1110	Post-FAT Configuration of Manual Fallback Control System	90	01-Sep-24	29-Oct-24	09-Dec-24	05-Feb-25	01-Aug-24		EM1540: FS, DS4790: FF, SC2200: FF				
SCT Plan Submissions		110	02-Sep-24	11-Dec-24	13-Aug-24	28-Apr-25	06-Jul-24						
Central System		64	02-Sep-24	14-Oct-24	04-Feb-25	14-Mar-25	06-Jul-24						
DS2940	Submission of Central System SCT Plan	24					06-Jul-24	02-Aug-24	DS4340: FS				
DS2950	Comment on SCT Plan/ Workshops (System Briefing & Comment Discussion)	24					03-Aug-24	22-Aug-24	DS2940: FS				
DS2960	Resubmission of SCT Plan for Central System	12	02-Sep-24	12-Sep-24	04-Feb-25	14-Feb-25	23-Aug-24		DS2950: FS				
DS2970	Approval of SCT Plan for Central System	24	13-Sep-24	14-Oct-24	15-Feb-25	14-Mar-25			DS2960: FS, SC1070: FF				
Traffic Control Devices		60	02-Oct-24	11-Dec-24	12-Nov-24	22-Jan-25							
DS2980	Submission of Traffic Control Devices SCT Plan	24	02-Oct-24	30-Oct-24	12-Nov-24	09-Dec-24			EM1650: FS				
DS2990	Comment on SCT Plan/ Workshops (System Briefing & Comment Discussion)	24	31-Oct-24	27-Nov-24	10-Dec-24	08-Jan-25			DS2980: FS				
DS3000	Resubmission of SCT Plan for Traffic Control Devices	12	28-Nov-24	11-Dec-24	09-Jan-25	22-Jan-25			DS2990: FS				
Communication System		84	02-Sep-24	11-Dec-24	24-Oct-24	14-Mar-25							
DS3020	Submission of Communication System SCT Plan	24	02-Sep-24	30-Sep-24	24-Oct-24	20-Nov-24			EM1040: FS				
DS3030	Comment on SCT Plan/ Workshops (System Briefing & Comment Discussion)	24	02-Oct-24	30-Oct-24	31-Dec-24	28-Jan-25			DS3020: FS				
DS3040	Resubmission of SCT Plan for Communication System	12	31-Oct-24	13-Nov-24	01-Feb-25	14-Feb-25			DS3030: FS				
DS3050	Approval of SCT Plan for Communication System	24	14-Nov-24	11-Dec-24	15-Feb-25	14-Mar-25			DS3040: FS, SC1340: FF				
CCTV System		37	02-Sep-24	14-Oct-24	20-Dec-24	03-Feb-25	23-Jul-24						
DS3070	Comment on SCT Plan/ Workshops (System Briefing & Comment Discussion)	24					23-Jul-24	13-Aug-24	DS3060: FS				
DS3080	Resubmission of SCT Plan for CCTV System	12	02-Sep-24	12-Sep-24	20-Dec-24	02-Jan-25	14-Aug-24		DS3070: FS				
DS3090	Approval of SCT Plan for CCTV System	24	13-Sep-24	14-Oct-24	03-Jan-25	03-Feb-25			DS3080: FS, SC1460: FF				
PABX System		37	02-Sep-24	14-Oct-24	26-Feb-25	07-Apr-25	27-Jul-24						
DS3110	Comment on SCT Plan/ Workshops (System Briefing & Comment Discussion)	24					27-Jul-24	22-Aug-24	DS3100: FS				
DS3120	Resubmission of SCT Plan for PABX System	12	02-Sep-24	12-Sep-24	26-Feb-25	08-Mar-25	23-Aug-24		DS3110: FS				
DS3130	Approval of SCT Plan for PABX System	24	13-Sep-24	14-Oct-24	10-Mar-25	07-Apr-25			DS3120: FS, SC1600: FF				
ET System		84	02-Sep-24	11-Dec-24	12-Nov-24	08-Mar-25							
DS3140	Submission of ET System SCT Plan	24	02-Sep-24	30-Sep-24	12-Nov-24	09-Dec-24			EM1070: FS				
DS3150	Comment on SCT Plan/ Workshops (System Briefing & Comment Discussion)	24	02-Oct-24	30-Oct-24	24-Dec-24	22-Jan-25			DS3140: FS				
DS3160	Resubmission of SCT Plan for ET System	12	31-Oct-24	13-Nov-24	23-Jan-25	08-Feb-25			DS3150: FS				
DS3170	Approval of SCT Plan for ET System	24	14-Nov-24	11-Dec-24	10-Feb-25	08-Mar-25			DS3160: FS, SC1730: FF				
PA System		45	02-Sep-24	12-Sep-24	12-Mar-25	22-Mar-25	11-Jul-24						
DS3190	Comment on SCT Plan/ Workshops (System Briefing & Comment Discussion)	24					11-Jul-24	05-Aug-24	DS3180: FS				
DS3200	Resubmission of SCT Plan for PA System	12					06-Aug-24	15-Aug-24	DS3190: FS				
DS3210	Approval of SCT Plan for PA System	24	02-Sep-24	12-Sep-24	12-Mar-25	22-Mar-25	16-Aug-24		DS3200: FS, SC1850: FF				
Radio System		84	02-Sep-24	11-Dec-24	29-Oct-24	15-Mar-25							
DS3220	Submission of Radio System SCT Plan	24	02-Sep-24	30-Sep-24	29-Oct-24	25-Nov-24			EM1090: SS 30				
DS3230	Comment on SCT Plan/ Workshops (System Briefing & Comment Discussion)	24	02-Oct-24	30-Oct-24	02-Jan-25	01-Feb-25			DS3220: FS				
DS3240	Resubmission of SCT Plan for Radio System	12	31-Oct-24	13-Nov-24	03-Feb-25	15-Feb-25			DS3230: FS				
DS3250	Approval of SCT Plan for Radio System	24	14-Nov-24	11-Dec-24	17-Feb-25	15-Mar-25			DS3240: FS, SC1980: FF				
Detection System		84	02-Sep-24	11-Dec-24	09-Sep-24	17-Jan-25							
DS3260	Submission of Detection System SCT Plan	24	02-Sep-24	30-Sep-24	09-Sep-24	08-Oct-24			EM1100: FS, EM1660: FS				
DS3270	Comment on SCT Plan/ Workshops (System Briefing & Comment Discussion)	24	02-Oct-24	30-Oct-24	07-Nov-24	04-Dec-24			DS3260: FS				



■ Remaining Work ◆ Milestone
■ Actual Work
■ Critical Activity

Date	Revision	Checked	Approved
31-Aug-24	Rev. 0	MY	

Activity ID	Activity Name	Original Duration	Early Start	Early Finish	Late Start	Late Finish	Actual Start	Actual Finish	Predecessor Details	2024			
										Aug 32	Sep 33	Oct 34	Nov 35
DS3280	Resubmission of SCT Plan for Detection System	12	31-Oct-24	13-Nov-24	05-Dec-24	18-Dec-24			DS3270: FS				
DS3290	Approval of SCT Plan for Detection System	24	14-Nov-24	11-Dec-24	19-Dec-24	17-Jan-25			DS3280: FS, SC2110: FF				
Manual Fallback Control System		64	02-Sep-24	14-Oct-24	04-Feb-25	14-Mar-25	06-Jul-24						
DS3300	Submission of Manual Fallback Control System SCT Plan	24					06-Jul-24	02-Aug-24	DS4790: FS				
DS3310	Comment on SCT Plan/ Workshops (System Briefing & Comment Discussion)	24					03-Aug-24	22-Aug-24	DS3300: FS				
DS3320	Resubmission of SCT Plan for Manual Fallback Control System	12	02-Sep-24	12-Sep-24	04-Feb-25	14-Feb-25	23-Aug-24		DS3310: FS				
DS3330	Approval of SCT Plan for Manual Fallback Control System	24	13-Sep-24	14-Oct-24	15-Feb-25	14-Mar-25			DS3320: FS, SC2250: FF				
Speed Enforcement System		84	02-Sep-24	11-Dec-24	30-Nov-24	22-Mar-25							
DS3380	Submission of Speed Enforcement System SCT Plan	24	02-Sep-24	30-Sep-24	30-Nov-24	28-Dec-24			EM1130: FS				
DS3390	Comment on SCT Plan/ Workshops (System Briefing & Comment Discussion)	24	02-Oct-24	30-Oct-24	09-Jan-25	08-Feb-25			DS3380: FS				
DS3400	Resubmission of SCT Plan for Speed Enforcement System	12	31-Oct-24	13-Nov-24	10-Feb-25	22-Feb-25			DS3390: FS				
DS3410	Approval of SCT Plan for Speed Enforcement System	24	14-Nov-24	11-Dec-24	24-Feb-25	22-Mar-25			DS3400: FS, SC2370: FF				
Power Distribution System		84	02-Sep-24	11-Dec-24	13-Aug-24	21-Nov-24							
DS3420	Submission of Power Distribution System SCT Plan	24	02-Sep-24	30-Sep-24	13-Aug-24	09-Sep-24			EM1620: FS, DS2592: FS				
DS3430	Comment on SCT Plan/ Workshops (System Briefing & Comment Discussion)	24	02-Oct-24	30-Oct-24	10-Sep-24	09-Oct-24			DS3420: FS				
DS3440	Resubmission of SCT Plan for Power Distribution System	12	31-Oct-24	13-Nov-24	10-Oct-24	24-Oct-24			DS3430: FS				
DS3450	Approval of SCT Plan for Power Distribution System	24	14-Nov-24	11-Dec-24	25-Oct-24	21-Nov-24			DS3440: FS, SC2490: FF				
Government Optical Fibre System		84	02-Sep-24	11-Dec-24	16-Jan-25	28-Apr-25							
DS3460	Submission of Government Optical Fibre System SCT Plan	24	02-Sep-24	30-Sep-24	16-Jan-25	15-Feb-25			EM1630: FS				
DS3470	Comment on SCT Plan/ Workshops (System Briefing & Comment Discussion)	24	02-Oct-24	30-Oct-24	17-Feb-25	15-Mar-25			DS3460: FS				
DS3480	Resubmission of SCT Plan for Government Optical Fibre System	12	31-Oct-24	13-Nov-24	17-Mar-25	29-Mar-25			DS3470: FS				
DS3490	Approval of SCT Plan for Government Optical Fibre System	24	14-Nov-24	11-Dec-24	31-Mar-25	28-Apr-25			DS3480: FS, SC2580: FF				
SAT Plan Submissions		96	02-Sep-24	26-Dec-24	07-Nov-24	12-Jul-25							
Central System		78	02-Sep-24	04-Dec-24	07-Jan-25	11-Apr-25							
DS3500	Submission of Central System SAT Plan	18	02-Sep-24	23-Sep-24	07-Jan-25	27-Jan-25			DS2940: FS				
DS3510	Comment on SAT Plan/ Workshops (System Briefing & Comment Discussion)	24	24-Sep-24	23-Oct-24	28-Jan-25	27-Feb-25			DS3500: FS				
DS3520	Resubmission of SAT Plan for Central System	12	24-Oct-24	06-Nov-24	28-Feb-25	13-Mar-25			DS3510: FS				
DS3530	Approval of SAT Plan for Central System	24	07-Nov-24	04-Dec-24	14-Mar-25	11-Apr-25			DS3520: FS, SC1090: FF				
Traffic Control Devices		48	31-Oct-24	26-Dec-24	30-Dec-24	27-Feb-25							
DS3540	Submission of Traffic Control Devices System SAT Plan	24	31-Oct-24	27-Nov-24	30-Dec-24	27-Jan-25			DS2980: FS				
DS3550	Comment on SAT Plan/ Workshops (System Briefing & Comment Discussion)	24	28-Nov-24	26-Dec-24	28-Jan-25	27-Feb-25			DS3540: FS				
Communication System		80	16-Sep-24	20-Dec-24	07-Nov-24	13-Feb-25							
DS3580	Submission of Communication System SAT Plan	20	16-Sep-24	10-Oct-24	07-Nov-24	29-Nov-24			DS3020: SS 12				
DS3590	Comment on SAT Plan/ Workshops (System Briefing & Comment Discussion)	24	12-Oct-24	08-Nov-24	30-Nov-24	28-Dec-24			DS3580: FS				
DS3600	Resubmission of SAT Plan for Communication System	12	09-Nov-24	22-Nov-24	30-Dec-24	13-Jan-25			DS3590: FS				
DS3610	Approval of SAT Plan for Communication System	24	23-Nov-24	20-Dec-24	14-Jan-25	13-Feb-25			DS3600: FS, SC1350: FF				
CCTV System		84	02-Sep-24	11-Dec-24	24-Dec-24	07-Apr-25							
DS3620	Submission of CCTV System SAT Plan	24	02-Sep-24	30-Sep-24	24-Dec-24	22-Jan-25			DS3060: FS 24				
DS3630	Comment on SAT Plan/ Workshops (System Briefing & Comment Discussion)	24	02-Oct-24	30-Oct-24	23-Jan-25	22-Feb-25			DS3620: FS				
DS3640	Resubmission of SAT Plan for CCTV System	12	31-Oct-24	13-Nov-24	24-Feb-25	08-Mar-25			DS3630: FS				
DS3650	Approval of SAT Plan for CCTV System	24	14-Nov-24	11-Dec-24	10-Mar-25	07-Apr-25			DS3640: FS, SC1480: FF				
PABX System		60	23-Sep-24	03-Dec-24	16-Apr-25	27-Jun-25							
DS3660	Submission of PABX System SAT Plan	24	23-Sep-24	22-Oct-24	16-Apr-25	15-May-25			DS3100: FS 48				
DS3670	Comment on SAT Plan/ Workshops (System Briefing & Comment Discussion)	24	23-Oct-24	19-Nov-24	16-May-25	13-Jun-25			DS3660: FS				
DS3680	Resubmission of SAT Plan for PABX System	12	20-Nov-24	03-Dec-24	14-Jun-25	27-Jun-25			DS3670: FS				
ET System		24	14-Nov-24	11-Dec-24	23-Jan-25	22-Feb-25							



GTECH Services (Hong Kong) Limited

■ Remaining Work
 ■ Actual Work
 ■ Critical Activity
 ◆ Milestone

Date	Revision	Checked	Approved
31-Aug-24	Rev. 0	MY	

Activity ID	Activity Name	Original Duration	Early Start	Early Finish	Late Start	Late Finish	Actual Start	Actual Finish	Predecessor Details	2024			
										Aug 32	Sep 33	Oct 34	Nov 35
DS3700	Submission of ET System SAT Plan	24	14-Nov-24	11-Dec-24	23-Jan-25	22-Feb-25			DS3140: FS 36				
PA System		84	05-Sep-24	14-Dec-24	01-Apr-25	12-Jul-25							
DS3740	Submission of PA System SAT Plan	24	05-Sep-24	04-Oct-24	01-Apr-25	29-Apr-25			DS3180: FS 48				
DS3750	Comment on SAT Plan/ Workshops (System Briefing & Comment Discussion)	24	05-Oct-24	02-Nov-24	30-Apr-25	29-May-25			DS3740: FS				
DS3760	Resubmission of SAT Plan for PA System	12	04-Nov-24	16-Nov-24	30-May-25	13-Jun-25			DS3750: FS				
DS3770	Approval of SAT Plan for PA System	24	18-Nov-24	14-Dec-24	14-Jun-25	12-Jul-25			DS3760: FS, SC1870: FF				
Radio System		24	28-Nov-24	26-Dec-24	23-Jan-25	22-Feb-25							
DS3780	Submission of Radio System SAT Plan	24	28-Nov-24	26-Dec-24	23-Jan-25	22-Feb-25			DS3220: FS 48				
Manual Fallback Control System		84	02-Sep-24	11-Dec-24	12-Nov-24	22-Feb-25							
DS3860	Submission of Manual Fallback Control System SAT Plan	24	02-Sep-24	30-Sep-24	12-Nov-24	09-Dec-24			DS3300: FS				
DS3870	Comment on SAT Plan/ Workshops (System Briefing & Comment Discussion)	24	02-Oct-24	30-Oct-24	10-Dec-24	08-Jan-25			DS3860: FS				
DS3880	Resubmission of SAT Plan for Manual Fallback Control System	12	31-Oct-24	13-Nov-24	09-Jan-25	22-Jan-25			DS3870: FS				
DS3890	Approval of SAT Plan for Manual Fallback Control System	24	14-Nov-24	11-Dec-24	23-Jan-25	22-Feb-25			DS3880: FS, SC2270: FF				
Speed Enforcement System		60	02-Oct-24	11-Dec-24	30-Dec-24	13-Mar-25							
DS3940	Submission of Speed Enforcement System Reliability Test Plan	24	02-Oct-24	30-Oct-24	30-Dec-24	27-Jan-25			DS3380: FS				
DS3950	Comment on Reliability Test Plan/ Workshops (System Briefing & Comment Discussion)	24	31-Oct-24	27-Nov-24	28-Jan-25	27-Feb-25			DS3940: FS				
DS3960	Resubmission of Reliability Test Plan for Speed Enforcement System	12	28-Nov-24	11-Dec-24	28-Feb-25	13-Mar-25			DS3950: FS				
Training Document & O&M Manual Submission for T2/TKOLTT TCSS		65	24-Oct-24	09-Jan-25	05-Aug-25	21-Oct-25							
DS3980	Submit Document for System Description	6	24-Oct-24	30-Oct-24	05-Aug-25	11-Aug-25			DS3580: SS 30				
DS4010	Submit System Administration Manual	11	31-Oct-24	12-Nov-24	12-Aug-25	23-Aug-25			DS3980: FS				
DS4020	Submit Training Manual	48	13-Nov-24	09-Jan-25	25-Aug-25	21-Oct-25			DS4010: FS				
Site Installation and Testing & Commissioning		384	02-Sep-24	11-Aug-25	06-Jun-24	02-Feb-27	01-Apr-24						
Installation & Testing Related to Stage 2 of Works		282	02-Sep-24	11-Aug-25	13-Jul-24	02-Feb-27							
Installation		140	02-Sep-24	20-Feb-25	13-Jul-24	02-Feb-27							
Portion 4 - TKO-LTT (LT Interchange)		70	15-Oct-24	06-Jan-25	13-Jul-24	03-Feb-25							
SW1930	Install Cable Containments	48	15-Oct-24	09-Dec-24	13-Jul-24	06-Sep-24			DS6404: FS, DS6540: FS, SW1030: FS				
SW1940	Install CCTV Camera	36	29-Oct-24	09-Dec-24	18-Dec-24	03-Feb-25			SW1040: SS 12, SW1930: SS 12, DS4090: FS, DS6440: FS				
SW1950	Laying of Signal Cable - the 1st Section	48	09-Nov-24	06-Jan-25	08-Oct-24	03-Dec-24			SW1040: SS 22, SW1060: SS 10, SW1070: SS 10, SW1930: SS 22				
SW1960	Install Equipment in Kiosk C	12	12-Nov-24	25-Nov-24	20-Nov-24	03-Dec-24			SW1050: FS, DS4340: FS, DS4440: FS				
Portion 1 - South Apron Up to SJS		66	09-Oct-24	26-Dec-24	18-Jul-24	04-Oct-24							
SW2000	Install Cable Containments - the 1st Section	48	09-Oct-24	04-Dec-24	18-Jul-24	11-Sep-24			SW1220: FS, SC2480: FF, DS6404: FS, DS6540: FS				
SW2010	Install CCTV Camera	24	28-Nov-24	26-Dec-24	05-Sep-24	04-Oct-24			SW2000: SS 42, SC1470: FF, DS4090: FS, DS6440: FS				
Portion 2 - Tunnel Section, Service Gallery, WVB & EVB		140	02-Sep-24	20-Feb-25	23-Aug-24	02-Feb-27							
SW2080	Install Cable Containments	82	02-Sep-24	09-Dec-24	23-Aug-24	02-Feb-27			SW2300: SS, SW2400: SS, SW2510: SS, SW2600: SS, SW2720: SS				
SW2120	Signal Cable Laying	123	23-Sep-24	20-Feb-25	29-Oct-24	02-Feb-27			SW2500: SS, SW2710: SS, SW2790: SS				
SW2090	Install CCTV Camera	83	02-Oct-24	09-Jan-25	21-Nov-24	02-Feb-27			SW2310: SS, SW2430: SS, SW2550: SS, SW2640: SS, SW2760: SS				
SW2110	Install Radio System in Service Gallery	95	02-Oct-24	23-Jan-25	06-Jan-25	02-Feb-27			SW2390: SS, SW2470: SS, SW2570: SS, SW2660: SS, SW2800: SS				
SW2100	Install ET	62	04-Nov-24	16-Jan-25	24-Feb-25	02-Feb-27			SW2340: SS, SW2480: SS, SW2590: SS, SW2680: SS, SW2820: SS				
Portion 3 - CKL Branch Tunnel in TKO-LTT Site		71	13-Sep-24	07-Dec-24	07-Feb-25	22-Apr-25							



■ Remaining Work ◆ Milestone
■ Actual Work
■ Critical Activity

Date	Revision	Checked	Approved
31-Aug-24	Rev. 0	MY	

Activity ID	Activity Name	Original Duration	Early Start	Early Finish	Late Start	Late Finish	Actual Start	Actual Finish	Predecessor Details	2024			
										Aug 32	Sep 33	Oct 34	Nov 35
SW2230	Install Cable Containments	36	13-Sep-24	28-Oct-24	13-Feb-25	26-Mar-25			SW1860: FS, SC2480: FF, DS6404: FS, DS6540: FS				
SW2220	Install CCTV Camera	29	20-Sep-24	25-Oct-24	07-Feb-25	12-Mar-25			SW1860: SS 12, SC1470: FF, DS4090: FS, DS6440: FS				
SW2250	Signal Cable Laying	36	21-Oct-24	30-Nov-24	11-Mar-25	22-Apr-25			SW2230: SS 18, SW1900: FF, SW2220: SS 6, SW1880: SS 6				
SW2240	Laying of Leaky Cable	36	28-Oct-24	07-Dec-24	21-Feb-25	03-Apr-25			SW2230: SS 6, SW2220: SS 12, SW1880: SS 12, SW1900: FF 6, SW1870: SS 22				
Underpass S21		30	02-Sep-24	08-Oct-24	26-Apr-25	03-Jun-25							
SW2260	Install Cable Containment	14	02-Sep-24	17-Sep-24	26-Apr-25	14-May-25			AC1040: SS, SC2480: FF, DS6404: FS, DS6540: FS				
SW2280	Laying of Leaky Cable	30	02-Sep-24	08-Oct-24	26-Apr-25	03-Jun-25			SW2260: SS				
SW2290	Laying of Power Cable From TCSS Cabinet in T2 Area	14	10-Sep-24	26-Sep-24	17-May-25	03-Jun-25			SW2260: SS 7				
SW2270	Install YAGI Antenna	7	19-Sep-24	26-Sep-24	26-May-25	03-Jun-25			SW2260: FS				
Testing		216	21-Nov-24	11-Aug-25	04-Feb-25	02-Feb-27							
TC1590	Testing of FS-related TCSS Equipment	216	21-Nov-24	11-Aug-25	04-Feb-25	02-Feb-27			TC1400: SS, TC1600: SS, TC1040: SS, TC1170: SS, TC1270: SS, TC1390: SS, TC1010: SS, TC1140: SS, TC1330: SS, TC1370: SS, TC1350: SS				
Portion 4 - TKO-LTT (LT Interchange)		100	06-Sep-24	06-Jan-25	06-Jun-24	03-Dec-24							
SW1020	Inspect Civil Provisions & Submit Inspection Report	12	06-Sep-24	20-Sep-24	06-Jun-24	20-Jun-24			AC1030: SS 5, DS6600: FS, DS6680: FS, DS6760: FS, DS6840: FS				
SW1030	Rectify Civil Provision Defects by Others	18	21-Sep-24	14-Oct-24	21-Jun-24	12-Jul-24			SW1020: FS				
Installation Works		70	15-Oct-24	06-Jan-25	13-Jul-24	03-Dec-24							
SW1040	Install Cable Containments	48	15-Oct-24	09-Dec-24	13-Jul-24	06-Sep-24			DS6400: FS, DS6540: FS, SW1030: FS				
SW1050	Install Equipment Racks	24	15-Oct-24	11-Nov-24	23-Sep-24	22-Oct-24			SW1030: FS				
SW1130	Install VLSL on Gantry	14	15-Oct-24	30-Oct-24	08-Nov-24	23-Nov-24			SC1210: FF, DS2810: FS, EM1650: FS, DS8250: FS, SW1040: SS				
SW1060	Install CCTV Camera	36	29-Oct-24	09-Dec-24	25-Sep-24	07-Nov-24			SW1040: SS 12, SW1930: SS 12, DS4090: FS, DS6440: FS				
SW1070	Install Detection Camera	36	29-Oct-24	09-Dec-24	25-Sep-24	07-Nov-24			SW1040: SS 12, SW1930: SS 12, DS4490: FS, DS6440: FS, DS7500: FS				
SW1080	Laying of Signal Cable - the 1st Section	48	09-Nov-24	06-Jan-25	08-Oct-24	03-Dec-24			SW1040: SS 22, SW1060: SS 10, SW1070: SS 10, SW1930: SS 22, DS8480: FS, DS8580: FS				
SW1100	Install Server Equipment	36	12-Nov-24	23-Dec-24	23-Oct-24	03-Dec-24			SW1050: FS, DS4440: FS, DS4340: FS				
SW1120	Install Equipment in Kiosk C	12	12-Nov-24	25-Nov-24	20-Nov-24	03-Dec-24			SW1050: FS, DS4340: FS, DS4440: FS				
Portion 1 - South Apron Up to SUS		96	02-Sep-24	26-Dec-24	12-Jun-24	04-Oct-24							
SW1210	Inspect Civil Provisions & Submit Inspection Report	12	02-Sep-24	14-Sep-24	12-Jun-24	25-Jun-24			AC1000: SS				
SW1220	Rectify Civil Provision Defects by Others	18	16-Sep-24	08-Oct-24	26-Jun-24	17-Jul-24			SW1210: FS				
Installation Works		66	09-Oct-24	26-Dec-24	18-Jul-24	04-Oct-24							
SW1230	Install Cable Containments - the 1st Section	48	09-Oct-24	04-Dec-24	18-Jul-24	11-Sep-24			SW1220: FS, SC2480: FF, DS6404: FS, DS6540: FS				
SW1250	Install Detection Cameras	24	24-Oct-24	20-Nov-24	05-Sep-24	04-Oct-24			SW1230: SS 12, SW2000: SS 12, DS4490: FS, DS6440: FS, DS7500: FS				
SW1240	Install CCTV Camera	24	28-Nov-24	26-Dec-24	05-Sep-24	04-Oct-24			SW1230: SS 42, SC1470: FF, DS4090: FS, DS6440: FS				
Portion 2 - Tunnel Section, Service Gallery, WVB & EVB		186	02-Sep-24	11-Dec-24	23-Aug-24	02-Feb-27	01-Apr-24						
Tunnel Section		84	02-Sep-24	11-Dec-24	23-Aug-24	02-Feb-27							



■ Remaining Work ◆ ◆ Milestone
■ Actual Work
■ Critical Activity

Date	Revision	Checked	Approved
31-Aug-24	Rev. 0	MY	

Activity ID	Activity Name	Original Duration	Early Start	Early Finish	Late Start	Late Finish	Actual Start	Actual Finish	Predecessor Details	2024			
										Aug 32	Sep 33	Oct 34	Nov 35
Tunnel Section - CH 6+568 to CH 7+100		78	02-Sep-24	04-Dec-24	23-Aug-24	02-Feb-27							
SW2860	Inspect Civil Provisions & Submit Inspection Report	3	02-Sep-24	04-Sep-24	23-Jan-27	26-Jan-27			AC1050: SS				
SW2870	Rectify Civil Provision Defects by Others	6	05-Sep-24	11-Sep-24	27-Jan-27	02-Feb-27			SW2860: FS				
Installation Works		78	02-Sep-24	04-Dec-24	23-Aug-24	22-Mar-25							
SW2300	Install Cable Containment	75	02-Sep-24	30-Nov-24	23-Aug-24	21-Nov-24			SC2480: FF, DS6540: FS, AC1050: SS				
SW2310	Install CCTV Camera	51	02-Oct-24	30-Nov-24	21-Nov-24	21-Jan-25			SW2360: SS, SC1470: FF, DS4090: FS, DS6440: FS				
SW2360	Install VLSL	51	02-Oct-24	30-Nov-24	21-Nov-24	21-Jan-25			SW2300: SS 18, SC1210: FF, DS2810: FS, EM1650: FS, DS8250: FS				
SW2370	Install PA in Service Gallery	51	02-Oct-24	30-Nov-24	06-Jan-25	08-Mar-25			SW2300: SS 24, DS4240: FS, DS6480: FS, DS6120: FS				
SW2380	Install PABX in Service Gallery	51	02-Oct-24	30-Nov-24	06-Jan-25	08-Mar-25			SW2370: SS, DS4140: FS, DS6040: FS, DS6480: FS				
SW2390	Install Radio System in Service Gallery	51	02-Oct-24	30-Nov-24	06-Jan-25	08-Mar-25			SW2380: SS, DS4390: FS, DS6520: FS				
SW2320	Install Detection Camera	48	05-Oct-24	30-Nov-24	21-Nov-24	17-Jan-25			SW2310: SS, SC2120: FF, DS6440: FS, DS7500: FS, EM1530: FS				
SW2330	Install SEC Camera	18	14-Nov-24	04-Dec-24	03-Mar-25	22-Mar-25			SW2320: SS 12, DS6320: FS, EM1130: FS, DS7410: FS				
Tunnel Section - CH 7+100 to CH 7+600		75	02-Sep-24	30-Nov-24	23-Aug-24	02-Feb-27							
SW2880	Inspect Civil Provisions & Submit Inspection Report	3	02-Sep-24	04-Sep-24	23-Jan-27	26-Jan-27			AC1060: SS				
SW2890	Rectify Civil Provision Defects by Others	6	05-Sep-24	11-Sep-24	27-Jan-27	02-Feb-27			SW2880: FS				
Installation Works		75	02-Sep-24	30-Nov-24	23-Aug-24	28-Apr-25							
SW2400	Install Cable Containment	75	02-Sep-24	30-Nov-24	23-Aug-24	21-Nov-24			SC2480: FF, DS6404: FS, DS6540: FS, AC1060: SS				
SW2490	Install GOFS (CH 6+568 to CH 7+100)	58	23-Sep-24	30-Nov-24	19-Feb-25	28-Apr-25			SC2570: FF, DS8560: FS, SW2400: SS 17				
SW2500	Signal Cable Laying and Termination (CH 6+568 to CH 7+100)	58	23-Sep-24	30-Nov-24	29-Oct-24	06-Jan-25			SC2480: FF, DS8560: FS, SW2400: SS 17				
SW2410	Install PA in Service Gallery	51	02-Oct-24	30-Nov-24	06-Jan-25	08-Mar-25			SW2400: SS 24, SC1860: FF, DS4240: FS, DS6480: FS, DS6120: FS				
SW2420	Install VLSL	51	02-Oct-24	30-Nov-24	21-Nov-24	21-Jan-25			SW2400: SS 18, SC1210: FF, DS2810: FS, EM1650: FS, DS8250: FS				
SW2430	Install CCTV Camera	51	02-Oct-24	30-Nov-24	21-Nov-24	21-Jan-25			SW2420: SS, SC1470: FF, DS4090: FS, DS6440: FS				
SW2440	Install PABX in Service Gallery	51	02-Oct-24	30-Nov-24	06-Jan-25	08-Mar-25			SW2410: SS, SC1590: FF, DS4140: FS, DS6040: FS, DS6480: FS				
SW2470	Install Radio System in Service Gallery	51	02-Oct-24	30-Nov-24	06-Jan-25	08-Mar-25			SW2440: SS, SC1990: FF, DS4390: FS, DS6520: FS				
SW2450	Install Detection Camera	48	05-Oct-24	30-Nov-24	21-Nov-24	17-Jan-25			SW2430: SS, SC2120: FF, DS6440: FS, DS7500: FS, EM1530: FS				
Tunnel Section - CH 7+600 to CH 8+100		75	02-Sep-24	30-Nov-24	23-Aug-24	02-Feb-27							
SW2900	Inspect Civil Provisions & Submit Inspection Report	3	02-Sep-24	04-Sep-24	23-Jan-27	26-Jan-27			AC1070: SS				
SW2910	Rectify Civil Provision Defects by Others	6	05-Sep-24	11-Sep-24	27-Jan-27	02-Feb-27			SW2900: FS				
Installation Works		75	02-Sep-24	30-Nov-24	23-Aug-24	08-Mar-25							
SW2510	Install Cable Containment	75	02-Sep-24	30-Nov-24	23-Aug-24	21-Nov-24			SC2480: FF, EM1620: FF, DS6404: FS, DS6540: FS, AC1070: SS				
SW2520	Install VLSL	51	02-Oct-24	30-Nov-24	21-Nov-24	21-Jan-25			SW2510: SS 12, SC1210: FF, DS2810: FS, EM1650: FS, DS8250: FS				



■ Remaining Work ◆ ◆ Milestone
■ Actual Work
■ Critical Activity

Date	Revision	Checked	Approved
31-Aug-24	Rev. 0	MY	

Activity ID	Activity Name	Original Duration	Early Start	Early Finish	Late Start	Late Finish	Actual Start	Actual Finish	Predecessor Details	2024			
										Aug 32	Sep 33	Oct 34	Nov 35
SW2530	Install PA in Service Gallery	51	02-Oct-24	30-Nov-24	06-Jan-25	08-Mar-25			SW2510: SS 24, SC1860: FF, DS4240: FS, DS6480: FS, DS6120: FS				
SW2550	Install CCTV Camera	51	02-Oct-24	30-Nov-24	21-Nov-24	21-Jan-25			SW2520: SS, SC1470: FF, DS4090: FS, DS6440: FS				
SW2560	Install PABX in Service Gallery	51	02-Oct-24	30-Nov-24	06-Jan-25	08-Mar-25			SW2530: SS, SC1590: FF, DS4140: FS, DS6040: FS, DS6480: FS				
SW2570	Install Radio System in Service Gallery	51	02-Oct-24	30-Nov-24	06-Jan-25	08-Mar-25			SW2560: SS, SC1990: FF, DS4390: FS, DS6520: FS				
SW2580	Install Detection Camera	48	05-Oct-24	30-Nov-24	21-Nov-24	17-Jan-25			SW2550: SS, SC2120: FF, DS6440: FS, DS7500: FS, EM1530: FS				
Tunnel Section - CH 8+100 to CH 8+750		84	02-Sep-24	11-Dec-24	04-Oct-24	28-Apr-25							
SW2920	Inspect Civil Provisions & Submit Inspection Report	3	02-Sep-24	04-Sep-24	04-Oct-24	07-Oct-24			AC1080: SS				
SW2930	Rectify Civil Provision Defects by Others	6	05-Sep-24	11-Sep-24	08-Oct-24	15-Oct-24			SW2920: FS				
Installation Works		75	12-Sep-24	11-Dec-24	16-Oct-24	28-Apr-25							
SW2600	Install Cable Containment	24	12-Sep-24	12-Oct-24	16-Oct-24	12-Nov-24			SC2480: FF, SW2930: FS, DS6404: FS, DS6540: FS				
SW2620	Install PA in Service Gallery	24	27-Sep-24	26-Oct-24	16-Jan-25	15-Feb-25			SW2600: SS 12, SC1860: FF, DS4240: FS, DS6480: FS, DS6120: FS				
SW2610	Install VLS	18	02-Oct-24	23-Oct-24	28-Nov-24	18-Dec-24			SW2600: SS 12, SC1210: FF, DS2810: FS, EM1650: FS, DS8250: FS				
SW2630	Install Traffic Control Devices	24	05-Oct-24	02-Nov-24	23-Jan-25	22-Feb-25			SW2600: SS 18, SC1210: FF, DS2810: FS, EM1650: FS, DS8250: FS				
SW2650	Install PABX in Service Gallery	24	14-Oct-24	09-Nov-24	03-Feb-25	01-Mar-25			SW2620: SS 12, SC1590: FF, DS4140: FS, DS6040: FS, DS6480: FS				
SW2700	Install GOFS (CH 7+600 to CH 8+750)	45	14-Oct-24	04-Dec-24	06-Mar-25	28-Apr-25			SW2600: FS, SC2570: FF, DS8560: FS				
SW2710	Signal Cable Laying and Termination (CH 7+600 to CH 8+750)	45	14-Oct-24	04-Dec-24	13-Nov-24	06-Jan-25			SW2600: FS, SC2480: FF				
SW2640	Install CCTV Camera	18	17-Oct-24	06-Nov-24	12-Dec-24	03-Jan-25			SW2610: SS 12, SC1470: FF, DS4090: FS, DS6440: FS				
SW2670	Install Detection Camera	18	31-Oct-24	20-Nov-24	27-Dec-24	17-Jan-25			SW2640: SS 12, SC2120: FF, DS4490: FS, DS6440: FS, DS7500: FS				
SW2680	Install ET	12	04-Nov-24	16-Nov-24	24-Feb-25	08-Mar-25			SW2630: FS, SC1720: FF, DS4190: FS, DS6080: FS, DS6480: FS				
SW2660	Install Radio System in Service Gallery	24	14-Nov-24	11-Dec-24	10-Feb-25	08-Mar-25			SW2650: SS 6, SC1990: FF, DS4390: FS, DS6160: FS, DS6520: FS				
SW2690	Install SEC Camera	18	14-Nov-24	04-Dec-24	03-Mar-25	22-Mar-25			SW2670: SS 12, SC2390: FF, EM1130: FS, DS6320: FS, DS7410: FS				
Tunnel Section - CH 8+750 to CH 9+250		28	07-Nov-24	09-Dec-24	07-Nov-24	09-Dec-24							
SW2940	Inspect Civil Provisions & Submit Inspection Report	1	07-Nov-24	07-Nov-24	07-Nov-24	07-Nov-24			AC1090: SS				
SW2950	Rectify Civil Provision Defects by Others	4	08-Nov-24	12-Nov-24	08-Nov-24	12-Nov-24			SW2940: FS				
Installation Works		23	13-Nov-24	09-Dec-24	13-Nov-24	09-Dec-24							
SW2720	Install Cable Containment	23	13-Nov-24	09-Dec-24	13-Nov-24	09-Dec-24			SC2480: FF, SW2950: FS, DS6404: FS, DS6540: FS				
West Ventilation Building		177	02-Sep-24	30-Nov-24	17-Dec-24	15-Mar-25	01-Apr-24						
Installation Works		177	02-Sep-24	30-Nov-24	17-Dec-24	15-Mar-25	01-Apr-24						
SW1650	Install Cable Containments	24	02-Sep-24	26-Oct-24	17-Dec-24	12-Feb-25	01-Apr-24		SC2480: FF, DS6400: FS, DS6540: FS				
SW1660	Position Equipment Rack	10	19-Sep-24	30-Sep-24	04-Jan-25	15-Jan-25			SW1650: SS 10, DS4610: FS 18				



Activity ID	Activity Name	Original Duration	Early Start	Early Finish	Late Start	Late Finish	Actual Start	Actual Finish	Predecessor Details	2024			
										Aug 32	Sep 33	Oct 34	Nov 35
SW1670	Install Network Equipment	25	02-Oct-24	31-Oct-24	16-Jan-25	17-Feb-25			SW1660: FS, SC1330: FF, DS4340: FS, DS4440: FS				
SW1690	Install PABX Equipment	25	02-Oct-24	31-Oct-24	17-Dec-24	16-Jan-25			SW1650: SS 18, SC1590: FF, DS4140: FS, DS6040: FS 2, DS6480: FS				
SW1680	Install Manual Fallback Control Equipment	24	30-Oct-24	26-Nov-24	06-Feb-25	05-Mar-25			SW1670: SS 12, EM1110: FS, SC2240: FF, DS6240: FS, DS7370: FS, DS8310: FS				
SW1720	Install PA Equipment	26	01-Nov-24	30-Nov-24	17-Jan-25	19-Feb-25			SC1860: FF, DS4240: FS, DS6480: FS, DS6120: FS, SW1690: FS				
SW1710	Install Radio Equipment	12	14-Nov-24	27-Nov-24	03-Mar-25	15-Mar-25			SW1690: FS, SC1990: FF, DS4390: FS, DS6160: FS, DS6520: FS				
East Ventilation Building		84	02-Sep-24	11-Dec-24	20-Nov-24	02-Feb-27							
SW2960	Inspect Civil Provisions & Submit Inspection Report	12	02-Sep-24	14-Sep-24	29-Dec-26	12-Jan-27			AC1010: SS, KD1010: FS				
SW2970	Rectify Civil Provision Defects by Others	18	16-Sep-24	08-Oct-24	13-Jan-27	02-Feb-27			SW2960: FS				
Installation Works		84	02-Sep-24	11-Dec-24	20-Nov-24	05-Mar-25							
SW1750	Install Cable Containments	24	02-Sep-24	30-Sep-24	20-Nov-24	17-Dec-24			SC2480: FF, DS6400: FS, DS6540: FS				
SW1790	Install PABX Equipment	20	28-Sep-24	23-Oct-24	26-Dec-24	18-Jan-25			SW1750: SS 18, SC1590: FF, DS4140: FS, DS6040: FS, DS6480: FS				
SW1760	Position Equipment Rack	12	02-Oct-24	16-Oct-24	18-Dec-24	02-Jan-25			SW1750: FS				
SW1770	Install Network Equipment	36	17-Oct-24	27-Nov-24	03-Jan-25	17-Feb-25			SW1760: FS, SC1330: FF, DS4340: FS, DS4440: FS				
SW1780	Install Manual Fallback Control Equipment	24	31-Oct-24	27-Nov-24	06-Feb-25	05-Mar-25			SW1770: SS 12, EM1110: FS, SC2240: FF, DS6240: FS, DS7370: FS, DS8310: FS				
SW1810	Install Radio Equipment	12	14-Nov-24	27-Nov-24	20-Jan-25	05-Feb-25			SW1790: FS, SC1990: FF, DS4390: FS, DS6160: FS, DS6520: FS				
SW1820	Install PA Equipment	12	28-Nov-24	11-Dec-24	06-Feb-25	19-Feb-25			SW1810: FS, SC1860: FF, DS4240: FS, DS6480: FS, DS6120: FS				
Portion 3 - CKL Branch Tunnel in TKO-LTT Site		95	02-Sep-24	24-Dec-24	11-Jan-25	19-Jun-25							
SW1850	Inspect Civil Provisions & Submit Inspection Report	3	02-Sep-24	04-Sep-24	11-Jan-25	14-Jan-25			AC1020: SS				
SW1860	Rectify Civil Provision Defects by Others	7	05-Sep-24	12-Sep-24	15-Jan-25	22-Jan-25			SW1850: FS				
Installation Works		68	13-Sep-24	04-Dec-24	23-Jan-25	22-Apr-25							
SW1870	Install CCTV Camera	29	13-Sep-24	19-Oct-24	23-Jan-25	28-Feb-25			SW1860: FS, SC1470: FF, DS4090: FS, DS6440: FS				
SW1890	Install Cable Containments	36	13-Sep-24	28-Oct-24	01-Feb-25	14-Mar-25			SW1860: FS, SC2480: FF, DS6404: FS, DS6540: FS				
SW1880	Install Detection Camera	29	14-Oct-24	15-Nov-24	07-Feb-25	12-Mar-25			SW1860: FS, SC2120: FF, DS4490: FS, DS6440: FS, DS7500: FS				
SW1910	Laying of Leaky Cable	36	17-Oct-24	27-Nov-24	22-Feb-25	04-Apr-25			SW1890: SS 6, SW1870: SS 22, SW1880: SS, SW1900: FF 6				
SW1900	Install Traffic Control Devices	24	24-Oct-24	20-Nov-24	28-Feb-25	27-Mar-25			SW1870: SS 9, SW1880: SS 9, SW2220: SS 9, SC1210: FF, DS2810: FS, EM1650: FS, DS8250: FS				
SW1920	Signal Cable Laying	36	24-Oct-24	04-Dec-24	11-Mar-25	22-Apr-25			SW1890: SS 32, SW1900: FF, SW1870: SS 6, SW1880: SS 6				
Site Commissioning Test		5	21-Nov-24	26-Nov-24	09-Apr-25	14-Apr-25							
TC1390	SCT of CCTV System	5	21-Nov-24	26-Nov-24	09-Apr-25	14-Apr-25			SW1870: FS, SW1920: SS 24, SW1910: SS 18, DS3090: FS, SW2220: FS, SW2250: SS 24, SW2240: SS 18, SC1500: FF				
Submit Site Commissioning Test Report		24	27-Nov-24	24-Dec-24	22-May-25	19-Jun-25							



■ Remaining Work ◆ ◆ Milestone
■ Actual Work
■ Critical Activity

Date	Revision	Checked	Approved
31-Aug-24	Rev. 0	MY	

Activity ID	Activity Name	Original Duration	Early Start	Early Finish	Late Start	Late Finish	Actual Start	Actual Finish	Predecessor Details	2024			
										Aug	Sep	Oct	Nov
DS5170	Submit CCTV System SCT Test Report	24	27-Nov-24	24-Dec-24	22-May-25	19-Jun-25			TC1390: FS	32	33	34	35

