

# **Civil Engineering and Development Department**

## **Trunk Road T2 Monthly Environmental Monitoring and Audit Report (under EP-451/2013) July 2025 (Version 1.0)**

Approved By



(Environmental Team Leader:  
Mr. KS Lee)

### REMARKS:

The information supplied and contained within this report is, to the best of our knowledge, correct at the time of printing.

CINOTECH accepts no responsibility for changes made to this report by third parties

### **CINOTECH CONSULTANTS LTD**

Room 1710, Technology Park,  
18 On Lai Street,  
Shatin, NT, Hong Kong  
Tel: (852) 2151 2083 Fax: (852) 3107 1388  
Email: [info@cinotech.com.hk](mailto:info@cinotech.com.hk)

Ref.: CEDKTD2EM00\_0\_0781L.25

13 August 2025

Hyder-Meinhardt Joint Venture  
23/F, Two Harbour Square  
180 Wai Yip Street, Kwun Tong  
Kowloon, Hong Kong

By Post and Email

Attention: Mr. Edwin Ching

Dear Mr. Ching,

**Re: Agreement No. EDO 01/2019  
Independent Environmental Checker for  
Contract No. ED/2018/04 – Trunk Road T2 and Infrastructure Works for  
Developments at the Former South Apron**

**Monthly EM&A Report (July 2025) for EP-451/2013**

Reference is made to the Environmental Team's submission of the Monthly EM&A Report for July 2025 (Version 1.0) certified by the ET Leader and provided to us via e-mail on 13 August 2025. We are pleased to inform you that we have no adverse comment on the captioned submission. We write to verify the captioned submission in accordance with Condition 3.4 of EP-451/2013.

Thank you for your attention. Please do not hesitate to contact the undersigned should you have any queries.

Yours sincerely,  
For and on behalf of  
Ramboll Hong Kong Limited



Y H Hui  
Independent Environmental Checker

c.c. CEDD  
BTP  
Cinotech

Attn.: Mr. Tommy Wong  
Attn.: Mr. Ivan Chau  
Attn.: Mr. K. S. Lee

By Fax: 2739 0076  
By email  
By Fax: 3107 1388

Q:\Projects\CEDKTD2EM00\02 Proj\_Mgt\02 Corr\CEDKTD2EM00\_0\_0781L.25.doc

## Table of contents

|   | Page      |
|---|-----------|
| <b>EXECUTIVE SUMMARY .....</b>                                      | <b>1</b>  |
| Introduction.....   | 1         |
| Summary of Main Works Undertaken and Key Measures Implemented ..... | 1         |
| Summary of Exceedances, Investigation and Follow-up.....            | 2         |
| Complaint Handling, Prosecution and Public Engagement .....         | 3         |
| Reporting Changes.....  | 3         |
| Future Key Issues.....  | 3         |
| Review of Status and Location of Monitoring Stations.....           | 4         |
| <b>1 INTRODUCTION.....</b>  | <b>5</b>  |
| Background.....   | 5         |
| Purpose of the Report.....  | 6         |
| Project Organizations.....  | 6         |
| Construction Activities undertaken during the Reporting Month ..... | 7         |
| Status of Environmental Licensing and Permitting .....              | 8         |
| <b>2. AIR QUALITY.....</b>  | <b>10</b> |
| Monitoring Requirement.....   | 10        |
| Monitoring Locations.....   | 10        |
| Monitoring Parameters and Frequency .....                           | 10        |
| Monitoring Equipment.....   | 11        |
| Monitoring Methodology.....   | 11        |
| Results and Observations .....                                      | 14        |
| Comparison of EM&A Result with EIA Prediction .....                 | 15        |
| <b>3 NOISE .....</b>  | <b>16</b> |
| Monitoring Locations.....   | 16        |
| Monitoring Parameters, Frequency and Duration.....                  | 16        |
| Monitoring Equipment.....   | 17        |
| Monitoring Methodology and QA/QC Procedure .....                    | 17        |
| Maintenance and Calibration .....                                   | 18        |
| Results and Observations .....                                      | 18        |
| Comparison of EM&A Result with EIA Prediction .....                 | 19        |
| <b>4 WATER QUALITY.....</b>   | <b>20</b> |
| Monitoring Requirement.....   | 20        |
| <b>5 MARINE ECOLOGY .....</b>                                       | <b>20</b> |
| <b>6 FISHERIES .....</b>  | <b>21</b> |
| <b>7 LANDSCAPE AND VISUAL .....</b>                                 | <b>21</b> |
| <b>8 CULTURAL HERITAGE.....</b>                                     | <b>24</b> |
| <b>9 WASTE MANAGEMENT .....</b>                                     | <b>24</b> |

|  |           |
|--|-----------|
| <b>10 ENVIRONMENTAL AUDIT .....</b>  | <b>25</b> |
| Site Audits.....   | 25        |
| Implementation Status of Environmental Mitigation Measures .....                       | 25        |
| Implementation Status of Event and Action Plans .....                                  | 26        |
| Status of Required Submission under Environmental Permit.....                          | 26        |
| <b>11 ENVIRONMENTAL NON-CONFORMANCE .....</b>  | <b>27</b> |
| Summary of Complaint, Warning, Notification of any Summons and Successful Prosecution. | 27        |
| Summary of Exceedance.....   | 27        |
| <b>12 FUTURE KEY ISSUES.....</b>   | <b>27</b> |
| Monitoring Schedule.....   | 28        |
| <b>13 CONCLUSIONS AND RECOMMENDATIONS.....</b>   | <b>28</b> |
| Conclusions.....   | 28        |
| Recommendations.....   | 28        |

## LIST OF TABLES

|            |   |
|------------|---|
| Table I    | Summary of Key Construction Work in the Reporting Month   |
| Table II   | Summary of Key Mitigation Measures Implemented in the Reporting Month                           |
| Table III  | Summary of Complaint/Summons/Prosecution in the Reporting Month                                 |
| Table IV   | Summary Table for Site Activities in the next Reporting Period                                  |
| Table V    | Summary Table for Review of Status and Location of Monitoring Stations                          |
| Table 1.1  | Key Project Contacts  |
| Table 1.2  | Summary of Key Construction Work in the Reporting Month   |
| Table 1.3  | Summary of Environmental License and Permit   |
| Table 2.1  | Air Quality Monitoring Locations  |
| Table 2.2  | Frequency and Parameters of Air Quality Monitoring  |
| Table 2.3  | Air Quality Monitoring Equipment  |
| Table 2.4  | Major Dust Source during Air Quality Monitoring   |
| Table 2.5  | Comparison of 1-hr TSP Monitoring Data with Predictions in EIA Report                           |
| Table 2.6  | Comparison of 24-hr TSP Monitoring Data with Predictions in EIA Report                          |
| Table 3.1  | Noise Monitoring Stations   |
| Table 3.2  | Frequency and Parameters of Noise Monitoring  |
| Table 3.3  | Noise Monitoring Equipment  |
| Table 3.4  | Major Noise Source during Noise Monitoring  |
| Table 3.5  | Baseline Noise Level and Noise Limit Level for Monitoring Stations                              |
| Table 3.6  | Comparison of Noise Monitoring Data with Predictions in EIA Report                              |
| Table 7.1  | Construction Phase Landscape and Visual Mitigation Measures                                     |
| Table 7.2  | Construction Phase Audit Checklist for Landscape and Visual Mitigation Measures                 |
| Table 10.1 | Observations and Recommendations of Site Audit  |
| Table 10.2 | Status of Required Submission under Environmental Permit  |
| Table 12.1 | Summary Table for Site Activities and the Key Environmental Issues in the next Reporting Period |



## **LIST OF FIGURES**

- Figure 1.1      Layout Plan of the Project Site  
Figure 1.2      Project Organisation for Environmental Monitoring and Audit  
Figure 2        Locations of Air Quality and Construction Noise Monitoring Stations

## **LIST OF APPENDICES**

- Appendix A    Action and Limit Levels  
Appendix B    Environmental Monitoring Schedules  
Appendix C    Copies of Calibration Certificates for Air Quality Monitoring  
Appendix D    Weather Information  
Appendix E    1-hour TSP Monitoring Results  
Appendix F    24-hour TSP Monitoring Results and Graphical Presentations  
Appendix G    Copies of Calibration Certificates for Noise Monitoring  
Appendix H    Noise Monitoring Results and Graphical Presentations  
Appendix I    Site Audit Summary  
Appendix J    Event and Action Plans  
Appendix K    Environmental Mitigation Implementation Schedule (EMIS)  
Appendix L    Summaries of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution  
Appendix M    Summary of Exceedance  
Appendix N    Tentative Construction Programme  
Appendix O    Waste Generated in the Reporting Month

## EXECUTIVE SUMMARY

### Introduction

1. This is the 65<sup>th</sup> Environmental Monitoring and Audit (EM&A) Report prepared by the Environmental Team (ET), Cinotech Consultants Ltd., for “Trunk Road T2”. This report summarized the monitoring results and audits findings of the EM&A programme under the issued Environmental Permit (EP) No. EP-451/2013 and in accordance with the EM&A Manual (AEIAR-174/2013) during the reporting month of July 2025.

### Summary of Main Works Undertaken and Key Measures Implemented

2. The main works of each works contracts undertaken during the reporting period are as follows:

**Table I Summary of Key Construction Work in the Reporting Month**

| Contract No. | Project Title   | Site Activities  |
|--------------|---|--|
| ED/2018/04   | Trunk Road T2 and Infrastructure Works for Developments at South Apron              | <ul style="list-style-type: none"> <li>• WVB – E&amp;M works</li> <li>• WVB – External works</li> <li>• DPR – Parapet Installation</li> <li>• DPR – Sign Gantry erection</li> <li>• SUS – E&amp;M works</li> <li>• LSCC – RC Structure</li> <li>• LSCC – Backfilling</li> <li>• WB – TBM Tunnelling</li> <li>• TSS – WB internal structure from CP22 to CP26</li> <li>• TSS – EB internal structure up to CP22</li> <li>• CP – TSS WB Tympanum construction</li> </ul> |
| ED/2020/03   | Trunk Road T2 - Traffic Control And Surveillance System (TCSS) and Associated Works | <ul style="list-style-type: none"> <li>• Installation of TCSS equipment at CKR Gantry G42, WVB, SUS, Tunnel (CP7 - CP21)</li> <li>• SCT for Cable</li> <li>• Erection of Fencing Wall and Metal Gate for Works Area</li> </ul>   |

3. Implementation of the key mitigation measures during the reporting period are as follows:

**Table II Summary of Key Mitigation Measures Implemented in the Reporting Month**

| Contract No. and Project Title   | Key Mitigation Measures Implemented  |
|--|--|
| ED/2018/04 - Trunk Road T2 and Infrastructure Works for Developments at South Apron              | <p><i>Air Quality</i></p> <ul style="list-style-type: none"> <li>Water spraying regularly on construction site area to avoid dust generation.</li> <li>Excavated dusty materials were covered by impervious sheets.</li> </ul> <p><i>Noise</i></p> <ul style="list-style-type: none"> <li>Air compressor was operated with door closed and have valid noise labels.</li> <li>Use of Quality Powered Mechanical Equipment (QPME)</li> <li>Erecting noise barriers on site to minimize noise impact generated from breaking activities.</li> </ul> <p><i>Water Quality</i></p> <ul style="list-style-type: none"> <li>WetSep was constructed to treat the surface runoff prior to discharge.</li> </ul> <p><i>Landscape and Visual</i></p> <ul style="list-style-type: none"> <li>Tree protection zone was fenced off to protect the existing tree.</li> </ul> |
| ED/2020/03 - Trunk Road T2 - Traffic Control And Surveillance System (TCSS) and Associated Works | N/A  |

Notes:

N/A: Not applicable

### Summary of Exceedances, Investigation and Follow-up

4. Exceedance of Action/Limit levels during the reporting month (July 2025) and the investigation results and/or follow-up actions:

#### *Air Quality Monitoring*

- No Action Level exceedance for 24-hour TSP was recorded.
- No Limit Level exceedance for 24-hour TSP was recorded.
- No Action Level and Limit Level exceedance for 1-hour TSP was recorded.

#### *Construction Noise Monitoring*

- No Limit Level exceedance for day time construction noise was recorded in this reporting month.
- No Action Level exceedance was recorded in this reporting month.

*Landscape and Visual Monitoring and Audit*

- No non-compliance of the landscape and visual impact was recorded in the reporting month. The implementation of landscape and visual and mitigation measures was checked by a Registered Landscape Architect (RLA) during the environmental site inspections.

**Complaint Handling, Prosecution and Public Engagement****Table III Summary of Complaint/Summons/Prosecution in the Reporting Month**

| Event   | Event Details |  | Follow-up/ Remedial Actions   | Status/<br>Remarks |
|---|---------------|--|---|--------------------|
|   | Number        | Brief Description  |   |                    |
| Complaints Received                               | 1             | A complaint regarding muddy water discharged into the “Kai Tak River” through an outfall near Children’s Hospital. | <ul style="list-style-type: none"> <li>• There is no direct evidence that the suspected muddy water was discharged from T2 construction site.</li> <li>• The following recommendations are made to contractor to further enhance the mitigation measures:               <ol style="list-style-type: none"> <li>1) Wheel washing bay would keep cleaning regularly to maintain the wheel washing performance;</li> <li>2) Wastewater from STP &amp; LSCC would be collected and pumped to WetSep of STP;</li> <li>3) The walkway and stockpile would keep covering after ducting work every day;</li> <li>4) Conduct regular maintenance for wastewater treatment facilities to maintain the quality of effluent;</li> <li>5) Conduct regular water quality monitoring.</li> </ol> </li> </ul> | Closed             |
| Notification of Summons and Prosecutions Received | 0             | -  | -   | -                  |
| Public Engagement Activities                      | 0             | -  | -   | -                  |

**Reporting Changes**

5. No reporting change in this reporting month.

**Future Key Issues**

6. The key works or activities will be anticipated in the next reporting period are as follows:

**Table IV Summary Table for Site Activities in the next Reporting Period**

| Contract No. and Project Title   | Site Activities (August 2025)  | Key Environmental Issues    |
|--|--|-----------------------------|
| ED/2018/04 - Trunk Road T2 and Infrastructure Works for Developments at South Apron              | <ul style="list-style-type: none"> <li>• WVB – E&amp;M works</li> <li>• WVB – External works</li> <li>• DPR – Parapet installation</li> <li>• DPR – Sign gantry erection</li> <li>• SUS – E&amp;M works</li> <li>• LSCC – RC Structure</li> <li>• LSCC – Backfilling</li> <li>• WB – TBM Tunnelling</li> <li>• TSS – WB internal structure from CP22 to CP26</li> <li>• TSS – EB internal structure up to CP22</li> <li>• CP – TSS WB Tympanum construction</li> </ul> | (A) / (B) / (C) / (D) / (E) |
| ED/2020/03 - Trunk Road T2 - Traffic Control And Surveillance System (TCSS) and Associated Works | <ul style="list-style-type: none"> <li>• Installation of TCSS equipment at CKR Gantry G42, WVB, SUS, Tunnel (CP7 - CP21)</li> </ul>  | (E)                         |

(A) Dust generation from haul road, stockpile of dusty materials, exposed site area and excavation works;

(B) Noisy construction activity such as breaking and drilling activities

(C) Runoff from exposed slope or site area;

(D) Wastewater and runoff discharge from site; and

(E) Accumulation of construction and general waste.

**Review of Status and Location of Monitoring Stations**

7. According to the EM&A Manual (AEIAR-174/2013), the number and location of the monitoring stations and parameters should be reviewed in every six months, or on as -needed basis, in order to cater for any changes in the surrounding environmental and the nature of works in progress. The latest review was conducted in July 2025 and the review of status and location of monitoring stations are summarized as follow:

**Table V Summary Table for Review of Status and Location of Monitoring Stations**

| Monitoring Station ID | Review Status   | Follow-up Action/ Recommendation |
|-----------------------|---|----------------------------------|
| KTD 2d                | ET has reviewed the status and location of KER1, KTD 1, KTD2d, CKL1 and CKL2. To conclude, the environmental monitoring conducted at KER1, KTD 1, KTD2d, CKL 1 and CKL 2 are appropriate, and the monitoring results reflect how the sensitive receiver(s) is/are impacted by the construction activities of the Project. | N/A                              |
| KER1                  |   |                                  |
| KTD 1                 |   |                                  |
| CKL 1                 |   |                                  |
| CKL 2                 |   |                                  |

N/A: Not Applicable

## 1 INTRODUCTION

### Background

- 1.1 In 2009, Civil Engineering and Development Department (CEDD) commissioned a Kai Tak Development (KTD) – Trunk Road T2 and Infrastructure at South Apron Investigation. The assignment covers the provision of the Trunk Road T2 and its connections with the Central Kowloon Route (CKR) at the north apron area and the Tseung Kwan O – Lam Tin Tunnel (TKOLTT) to the south in the Cha Kwo Ling area.
- 1.2 The Trunk Road T2 Project is one of the designated Projects under Schedule 2 of the EIAO proposed in the KTD. CEDD submitted the Project Profile (No. PP-379/2009) on 24 March 2009 for application for an EIA study brief for the Trunk Road T2 Project under the EIAO. Accordingly, an EIA Study Brief (ESB-203/2009) for the Trunk Road T2 Project was issued on 30 April 2009. The Environmental Impact Assessment (EIA) Report for the Trunk Road T2 Project was approved under the Environmental Impact Assessment Ordinance (EIAO) on 19 September 2013. The corresponding Environmental Permit (EP) was issued on 19 September 2013 (EP no.: EP-451/2013).
- 1.3 The Contract No. ED/2018/04 is the main contract of Trunk Road T2 (“T2 Main Works”) which comprises mainly the design and construction of a dual two-lane trunk road of approximately 3.4km long with about 3.1km of the trunk road in form of tunnel; ventilation and administration buildings, environmental protection and mitigation works and etc. Moreover, the Contract No. ED/2020/03 is the other contract under Trunk Road T2 Project which comprises mainly design and construction of the TCSS for this Project. The EM&A programme at Kai Tak area under the Contract ED/2018/04 and ED/2020/03 are governed by the EP-451/2013 and EM&A Manual (AEIAR-174/2013). The work areas of the Trunk Road T2 Project are shown in **Figure 1** and the works to be executed under each Contract and corresponding EP are summarized as follows:

| Environmental Permit        | Works Description  |
|-----------------------------|--|
| EP-451/2013 – Trunk Road T2 | <u>ED/2018/04</u> <ul style="list-style-type: none"> <li>Construction of highway and sub-sea tunnel connecting between Central Kowloon Route and Cha Kwo Ling Tunnel</li> <li>Western &amp; Eastern Ventilation Buildings</li> </ul> <u>ED/2020/03</u> <ul style="list-style-type: none"> <li>Design and construction of TCSS for Trunk Road T2</li> </ul> |

### Monitoring Works in Kai Tak under EP-451/2013

- 1.4 Under Contract No. KL/2014/03 – Kai Tak Development – Stage 3 Infrastructure Works for Development at the Southern Part of the Former Runway (“T2 Advance Works”), the baseline monitoring works in Kai Tak under the EM&A Manual (AEIAR-174/2013) were conducted by the Environmental Team (ET) for the Contract No. KL/2014/03 at the approved relocated monitoring locations (EPD reference: EP2/K19/A/21 pt.5), namely KTD1a, KTD2a & KER1a. During the impact monitoring period, monitoring locations KTD 2a and KER 1a were relocated to new locations, i.e. KTD 2b and KER 1b (EPD reference: ( ) in EP2/K19/A/21 pt. 6 and ( ) in EP2/K19/A/21 pt. 5) respectively. Location KTD2b was then further relocated to location KTD2c, the proposal of such relocation was submitted to EPD on 24 March 2020 and was approved by EPD on 6 April 2020 (EPD reference: ( ) in EP2/K19/A/21 pt.7). The aforementioned relocation was effective from 9 April 2020. Since the major part of work under

Contract No. KL/2014/03 has been completed and monitoring works conducted by the ET of Contract No. KL/2014/03 was determined to be ceased, the impact monitoring within the Kai Tak area was then handed over to the ET of Contract No. ED/2018/04 on 1 August 2020. The monitoring location has been reviewed and updated to obtain the data with higher representative based on several conditions, such as distance between monitoring location and the sensitive receiver, non-project related interference, obstruction to the construction works on site and the power supply problem. The monitoring location KTD1a and KER1b has been updated to the monitoring location KTD1 and KER1 on 3 August 2020, where are the original location as proposed in the EM&A manual (AEIAR-174/2013). And the monitoring location KTD2c was remained unchanged after the aforementioned review. Location KTD2c was then further relocated to location KTD2d, the proposal of such relocation was submitted on 9 March 2021 and was approved by EPD on 27 March 2021 (EPD reference: ( ) in EP2/K19/A/21 pt.8). The aforementioned relocation was effective from 24 May 2021. The impact monitoring for the three stations KTD1, KTD2d and KER1 are currently conducted by the ET of T2 Main Works

#### Monitoring Works in Cha Kwo Ling under EP-451/2013

- 1.5 The environmental impact of the remaining works in Cha Kwo Ling, under EP-451/2013, shall be monitored at the two proposed stations, namely CKL1, CKL2, in accordance to the EM&A Manual (AEIAR-174/2013). The impact monitoring for the two proposed stations shall be conducted by the ET of T2 Main Works.
- 1.6 Cinotech Consultants Ltd. Was designated as the Environmental Team (ET) to undertake the EM&A works for “Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron” (hereinafter called the “Project”) and “Trunk Road T2 –Traffic Control & Surveillance System (TCSS) and Associated Works”.

#### **Purpose of the Report**

- 1.7 This is the 65<sup>th</sup> Monthly EM&A Report which summarises the impact monitoring results and audit findings for the EM&A programme during the reporting period in July 2025.

#### **Project Organizations**

- 1.8 Different Parties with different levels of involvement in the Project organization include:
  - Permit Holder – Civil Engineering and Development Department (CEDD)
  - Supervisor Representative – Hyder-Meinhardt Joint Venture (HMJV)
  - Environmental Team (ET) – Cinotech Consultants Limited (Cinotech)
  - Independent Environmental Checker (IEC) – Ramboll Hong Kong Limited (Ramboll)
  - Contractor – Bouygues Travaux Publics (BTP) (For ED/2018/04) & GTECH Services (Hong Kong) Limited (For ED/2020/03)

1.9 The key contacts of the Project are shown in **Table 1.1**.

**Table 1.1 Key Project Contacts**

| Party    | Role                              | Contact Person          | Phone No. |
|----------|-----------------------------------|-------------------------|-----------|
| CEDD     | Permit Holder                     | Mr. Wong Chi Wai, Tommy | 3842 7111 |
| HMJV     | Supervisor Representative         | Ms. Hazel Tang          | 2149 8524 |
| Cinotech | Environmental Team                | Mr. KS Lee (ETL)        | 2151 2091 |
|          |                                   | Ms. Karina Chan         | 2157 3880 |
| Ramboll  | Independent Environmental Checker | Mr. YH Hui              | 3465 2850 |
| BTP      | Contractor (ED/2018/04)           | Mr. Roy Leung           | 6628 2685 |
| GTECH    | Contractor (ED/2020/03)           | Mr. Deacon Choi         | 6038 3568 |

1.10 The Organizational Structure for Environmental Management is shown in **Figure 1.2**.

### Construction Activities undertaken during the Reporting Month

1.11 The major site activities undertaken in the reporting month included:

**Table 1.2 Summary of Key Construction Work in the Reporting Month**

| Contract No. | Project Title   | Site Activities  |
|--------------|---|--|
| ED/2018/04   | Trunk Road T2 and Infrastructure Works for Developments at South Apron              | <ul style="list-style-type: none"> <li>• WVB – E&amp;M works</li> <li>• WVB – External works</li> <li>• DPR – Parapet Installation</li> <li>• DPR – Sign Gantry erection</li> <li>• SUS – E&amp;M works</li> <li>• LSCC – RC Structure</li> <li>• LSCC – Backfilling</li> <li>• WB – TBM Tunnelling</li> <li>• TSS – WB internal structure from CP22 to CP26</li> <li>• TSS – EB internal structure up to CP22</li> <li>• CP – TSS WB Tympanum construction</li> </ul> |
| ED/2020/03   | Trunk Road T2 – Traffic Control And Surveillance System (TCSS) and Associated Works | <ul style="list-style-type: none"> <li>• Installation of TCSS equipment at CKR Gantry G42, WVB, SUS, Tunnel (CP7 - CP21)</li> <li>• SCT for Cable</li> <li>• Erection of Fencing Wall and Metal Gate for Works Area</li> </ul>   |



- 1.12 The EM&A programme requires construction noise, air quality monitoring and environmental site audit, etc. The EM&A requirements for each parameter are described in the following sections, including:
- All monitoring parameters;
  - Action and Limit levels for all environmental parameters;
  - Event Action Plans;
  - Environmental mitigation measures, as recommended in the Project EIA Report.
- 1.13 The advice on the implementation status of environmental protection and pollution control/mitigation measures is summarized in **Section 10** of this report.
- 1.14 This report presents the monitoring results, observations, locations, equipment, period, methodology and QA/QC procedures of the monitoring parameters of the required environmental monitoring works and audit works for the Project in July 2025.

### Status of Environmental Licensing and Permitting

- 1.15 All permits/licenses obtained for the Project are summarized in **Table 1.3**.

**Table 1.3 Summary of Environmental License and Permit**

| Contract No.  | Permit / License No.  | Valid Period |             | Status                  |
|---|---|--------------|-------------|-------------------------|
|   |   | From         | To          |                         |
| Environmental Permit (EP)   |   |              |             |                         |
| N/A   | EP-451/2013   | 19 Sep 2013  | N/A         | Valid                   |
| Notification pursuant to Air Pollution (Construction Dust) Regulation |   |              |             |                         |
| ED/2018/04  | Ref. No.: 451120  | 20 Nov 2019  | N/A         | Valid                   |
| ED/2020/03  | Ref. No.: 483143  | 15 Aug 2022  | N/A         | Valid                   |
| Billing Account for Construction Waste Disposal                       |   |              |             |                         |
| ED/2018/04  | A/C No.: 7036016  | 09 Dec 2019  | N/A         | Valid                   |
| ED/2020/03  | A/C No.: 7043158  | 31 Jan 2022  | N/A         | Valid                   |
| Billing Account for Vessel Disposal                                   |   |              |             |                         |
| ED/2018/04  | A/C No.: 7037747 (Application No.: CEDD01260)                 | 26 Apr 2025  | 25 Jul 2025 | Valid until 25 Jul 2025 |
|   | A/C No.: 7037747 (Application No.: CEDD01280)                 | 26 Jul 2025  | 25 Oct 2025 | Valid                   |
| Construction Noise Permit   |   |              |             |                         |
| ED/2018/04  | CNP No. (For Depressed Road & Supporting Area): GW-RE0248-25  | 31 Mar 2025  | 29 Sep 2025 | Valid                   |
|   | CNP No. (For Launching Shaft and Barging Point): GW-RE0715-25 | 30 Jun 2025  | 29 Dec 2025 | Valid                   |
| Wastewater Discharge License  |   |              |             |                         |
| ED/2018/04  | WT00036183-2020 (For Depressed Road Area)                     | 27 Jul 2020  | 31 Jul 2025 | Valid until 31 Jul 2025 |
|   | WT00039117-2021 (For Site Office and Support Area)            | 28 Sep 2021  | 30 Sep 2026 | Valid                   |

| Contract No.                           | Permit / License No.  | Valid Period |             | Status                  |
|--|---|--------------|-------------|-------------------------|
|  |   | From         | To          |                         |
|  | WT00036228-2020 (For Launching Shaft)                           | 10 Nov 2021  | 31 Jul 2025 | Valid until 31 Jul 2025 |
|  | WT0001175-2023 (For Portion Q)                                  | 26 Sep 2023  | 30 Sep 2028 | Valid                   |
|  | WT00046131-2025 (For Launching Shaft)                           | 14 Apr 2025  | 31 Jul 2030 | Valid                   |
|  | WT10001495-2023 (For Depressed Road & TBM Cutter Disc Workshop) | 27 May 2025  | 31 Mar 2029 | Valid                   |
| <b>Chemical Waste Producer License</b> |   |              |             |                         |
| ED/2018/04                             | WPN: 5213-286-B2557-03  | 09 Mar 2020  | N/A         | Valid                   |
| <b>Marine Dumping Permit</b>           |   |              |             |                         |
| ED/2018/04                             | EP/MD/26-010  | 01 Jul 2025  | 30 Sep 2025 | Valid                   |

## 2. AIR QUALITY

### Monitoring Requirement

- 2.1 According to the EM&A Manual (AEIAR-174/2013), 24-hour Total Suspended Particulates (TSP) monitoring was conducted to monitor the air quality for this Project. For regular impact monitoring, a sampling frequency of at least once in every six days at all of the monitoring stations for 24-hour TSP monitoring. In case of complaints, 1-hour TSP monitoring should be conducted at least three times in every six days when the highest dust impacts are likely to occur. **Appendix A** shows the established Action/Limit Levels for the environmental monitoring works.

### Monitoring Locations

- 2.2 Five designated monitoring stations were selected for air quality monitoring programme. **Table 2.1** describes the air quality monitoring locations, which are also depicted in **Figure 2**.
- 2.3 The monitoring location at Kai Tak area has been reviewed and updated to obtain the data with higher representative based on several conditions, such as distance between monitoring location and the sensitive receiver, non-project related interference, obstruction to the construction works on site and the power supply problem. The monitoring location KTD1a and KER1b has been updated to KTD1 and KER1 respectively, where are the original location as proposed in the EM&A manual (AEIAR-174/2013). And the monitoring location KTD2c was remained unchanged after the aforementioned review. Monitoring location KTD2c was then further relocated to KTD2d after the review of status and location of monitoring station conducted in between February and March 2021.

**Table 2.1 Air Quality Monitoring Locations**

| Monitoring Stations | Location  |
|---------------------|---|
| KTD1                | Centre of Excellence in Paediatrics (Children's Hospital) |
| KTD2d               | Next to the SOR Office of Trunk Road T2 in Kai Tak Area   |
| KER1                | Future Residential Development at Kerry Godown            |
| CKL1                | Flat 121 Cha Kwo Ling Village                             |
| CKL2                | Flat 103 Cha Kwo Ling Village                             |

### Monitoring Parameters and Frequency

- 2.4 **Table 2.2** summarizes the monitoring parameters, monitoring period and frequencies of impact air quality monitoring. The monitoring schedule is shown in **Appendix B**.

**Table 2.2 Frequency and Parameters of Air Quality Monitoring**

| Monitoring Stations            | Parameter   | Period      | Frequency  |
|--------------------------------|-------------|-------------|--|
| KTD1, KTD2d, KER1, CKL1 & CKL2 | 1-hour TSP  | 0700 – 1900 | 3 times per 6 days (as required in case of complaints) |
| KTD1, KTD2d, KER1, CKL1 & CKL2 | 24-hour TSP | 24 hours    | Once every 6 days                                      |

**Monitoring Equipment**

- 2.5 High Volume Samplers (HVS) in compliance with the specification stipulated in the EM&A Manual (AEIAR-174/2013), Section 2.2.1.4, were used to carry out 24-hour TSP monitoring. Direct reading dust meter were also used to measure 1-hour average TSP levels. The 1-hour sampling was determined by HVS to check the validity and accuracy of the results measured by direct reading method.
- 2.6 Wind data monitoring equipment was set at rooftop (about 41/F) of Yau Lai Estate Bik Lai House, Lam Tin for logging wind speed and wind direction such that the wind sensors were clear of obstructions or turbulence caused by building. The wind data monitoring equipment was re-calibrated at least once every six months and the wind directions were divided into 16 sectors of 22.5 degrees each. Wind data is attached in **Appendix D**.
- 2.7 **Table 2.3** summarizes the equipment used for air quality monitoring. Copies of calibration certificates are attached in **Appendix C**.

**Table 2.3 Air Quality Monitoring Equipment**

| Equipment       | Model  | Quantity |
|-----------------|--|----------|
| HVS Sampler     | TISCH Model: TE-5170 (Serial no. 0723, 1956, 10595, 1316, 5280)  | 5        |
| Calibrator      | TISCH Model: TE-5025A (Serial no. 3864)                          | 1        |
| Wind Anemometer | Davis Weather Monitor II, Model no. 7440 (Serial no. MC01010A44) | 1        |

**Monitoring Methodology*****1-hour TSP Monitoring*****Measuring Procedures**

- 2.8 The measuring procedures of the 1-hour dust meter are in accordance with the Manufacturer's Instruction Manual as follows:

(Sibata Model No.: LD-3B/LD-5R)

- The 1-hour dust meter is placed at least 1.3 meters above ground.
- Set POWER to "ON" and make sure that the battery level was not flash or in low level.
- Allow the instrument to stand for about 3 minutes and then the cap of the air sampling inlet has been released.
- Push the knob at MEASURE position.

- Set time/mode setting to [BG] by pushing the time setting switch. Then, start the background measurement by pushing the start/stop switch once. It will take 6 sec. to complete the background measurement.
- Push the time setting switch to change the time setting display to [MANUAL] at the bottom left of the liquid crystal display. Finally, push the start/stop switch to stop the measuring after 1 hour sampling.
- Information such as sampling date, time, count value and site condition were recorded during the monitoring period.

#### Maintenance/Calibration

2.9 The following maintenance/calibration is required for the 1-hour dust meter:

- Check and calibrate the meter by HVS to check the validity and accuracy of the results measured by direct reading method at 2-month intervals throughout all stages of the air quality monitoring.

#### ***24-hour TSP Monitoring***

##### Instrumentation

2.10 High volume samplers (HVS) (TISCH Model: TE-5170) complete with appropriate sampling inlets was employed for 24-hour TSP monitoring. The sampler was composed of a motor, a filter holder, a flow controller and a sampling inlet and its performance specification complied with that required by USEPA Standard Title 40, Code of Federation Regulations Chapter 1 (Part 50). Moreover, the HVS also met all the requirements in Section 2.2 of the Annex II Specification.

2.11 The positioning of the HVS samplers are as follows:

- A horizontal platform with appropriate support to secure the samplers against gusty wind shall be provided;
- No two samplers shall be placed less than 2 meters apart;
- The distance between the sampler and an obstacle, such as buildings, must be at least twice the height that the obstacle protrudes above the sampler;
- A minimum of 2 metres of separation from walls, parapets and penthouses is required for rooftop samplers;
- A minimum of 2 metres of separation from any supporting structure, measured horizontally is required;
- No furnace or incinerator flue is nearby;
- Airflow around the sampler is unrestricted;
- The sampler is more than 20 metres from the dripline;
- Any wire fence and gate, to protect the sampler, shall not cause any obstruction during monitoring;
- Permission must be obtained to set up the samplers and to obtain access to the monitoring stations; and
- A secured supply of electricity is needed to operate the samplers.

Operating/analytical procedures for the operation of HVS

2.12 Operating/analytical procedures for the air quality monitoring are highlighted as follows:

- Prior to the commencement of the dust sampling, the flow rate of the high-volume sampler was properly set (between 0.6 m<sup>3</sup>/min. and 1.7 m<sup>3</sup>/min.) in accordance with the EM&A manual (AEIAR-174/2013). The flow rate shall be indicated on the flow rate chart.
- For TSP sampling, fiberglass filters with a collection efficiency of > 99% for particles of 0.3µm diameter were used.
- The power supply was checked to ensure the sampler worked properly. On sampling, the sampler was operated for 5 minutes to establish thermal equilibrium before placing any filter media at the designated air monitoring station.
- The filter holding frame was then removed by loosening the four nuts and a weighted and conditioned filter was carefully centered with the stamped number upwards, on a supporting screen.
- The filter was aligned on the screen so that the gasket formed an airtight seal on the outer edges of the filter. Then the filter holding frame was tightened to the filter holder with swing bolts. The applied pressure should be sufficient to avoid air leakage at the edges.
- The shelter lid was closed and secured with the aluminium strip.
- The timer was then programmed. Information was recorded on the record sheet, which included the starting time, the weather condition and the filter number (the initial weight of the filter paper can be found out by using the filter number).
- After sampling, the filter was removed and sent to the HOKLAS laboratory (High Precision Chemical Testing Ltd.) for weighing. The elapsed time was also recorded.
- Before weighing, all filters were equilibrated in a conditioning environment for 24 hours. The conditioning environment temperature should be between 25°C and 30°C and not vary by more than ±3°C; the relative humidity (RH) should be < 50% and not vary by more than ±5%. A convenient working RH is 40%.

Maintenance/Calibration

2.13 The following maintenance/calibration is required for the HVS:

- The high-volume motors and their accessories were properly maintained. Appropriate maintenance such as routine motor brushes replacement and electrical wiring checking were made to ensure that the equipment and necessary power supply are in good working condition.
- High volume samplers were calibrated at bi-monthly intervals using TE-5025A Calibration Kit throughout all stages of the air quality monitoring.

**Results and Observations**

- 2.14 Impact air quality monitoring was conducted at five monitoring stations as scheduled. The monitoring schedule is shown in **Appendix B**.
- 2.15 No Action and no Limit Level exceedance was recorded for 24-hour TSP monitoring in the reporting month. No exceedance of 24-hour TSP were considered as **project related** and no exceedance of 24-hour TSP were considered as **non-project related**. Details of the exceedance are presented in **Appendix M**.
- 2.16 The air temperature, relative humidity, and the precipitation data were obtained from daily extracts of Hong Kong Observatory Climate Information Service. This weather information for the reporting month is summarized in **Appendix D**.
- 2.17 The monitoring data and graphical presentations of 24-hour TSP monitoring results are shown in **Appendix F**.
- 2.18 According to field observations observed in the reporting period, the major dust source identified at the designated air quality monitoring stations are as follows:

**Table 2.4 Major Dust Source during Air Quality Monitoring**

| Monitoring Stations   | Major Dust Source   |
|---|---|
| KTD 1 - Centre of Excellence in Paediatrics (Children's Hospital) | <ul style="list-style-type: none"> <li>Project related construction activities (i.e., Loading and unloading of C&amp;D wastes, drilling, crushing of material);</li> <li>Vehicle movement in the site;</li> <li>Construction activities at the nearby construction sites of New Acute Hospital; and,</li> <li>Road traffic along Shing Fung Road, Shing Cheong Road, Cheung Yip Street, Kai Hing Road and Kwun Tong Bypass.</li> </ul>                |
| KER 1 – Future Residential Development at Kerry Godown            |   |
| KTD 2d – Next to the SOR Office of Trunk Road T2 in Kai Tak Area  | <ul style="list-style-type: none"> <li>Project related construction activities (i.e., Loading and unloading of C&amp;D material, crushing of material);</li> <li>Vehicle movement in the site; and,</li> <li>Non-project related construction activities (i.e excavating work, Loading and unloading of C&amp;D wastes at the nearby construction site of Additional District Cooling System at Kai Tak Development, Paul Y. Engineering.)</li> </ul> |
| CKL1 - Flat 121 Cha Kwo Ling Village                              | <ul style="list-style-type: none"> <li>Road Traffic along Cha Kwo Ling Road</li> </ul>  |
| CKL2 - Flat 103 Cha Kwo Ling Village                              |   |

**Comparison of EM&A Result with EIA Prediction**

2.19 The air monitoring data was compared with the predictions in Table 4.14 of EIA Report, AEIAR-174/2013 (as approved in 2013) as summarised in **Table 2.6** for 24-hour TSP.

**Table 2.6 Comparison of 24-hr TSP Monitoring Data with Predictions in EIA Report**

| Monitoring Stations   | ASR ID             | Predicted Maximum 24-hr TSP Concentration in EIA Report (AEIAR-174/2013), $\mu\text{g}/\text{m}^3$ | Maximum 24-hr TSP Concentration in the Reporting Month (July 2025), $\mu\text{g}/\text{m}^3$ |
|---|--------------------|--|--|
| KTD 1 - Centre of Excellence in Paediatrics (Children's Hospital) | KTD3               | 126  | 34.1   |
| KTD 2d – Next to the SOR Office of Trunk Road T2 in Kai Tak Area  | N/A <sup>(2)</sup> | N/A <sup>(2)</sup>   | 50.2   |
| KER 1 – Future Residential Development at Kerry Godown            | KTD6               | 169  | 38.4   |
| CKL1 - Flat 121 Cha Kwo Ling Village                              | N/A <sup>(2)</sup> | N/A <sup>(2)</sup>   | 43.5   |
| CKL2 - Flat 103 Cha Kwo Ling Village                              | N/A <sup>(2)</sup> | N/A <sup>(2)</sup>   | 121.7  |

Remarks:

(1) No 24-hr TSP concentration was predicted in EIA Report (AEIAR-174/2013)

2.20 In the reporting month, the 24-hour TSP concentration at KER1 and KTD1 were lower than the prediction in the EIA Report, AEIAR-174/2013 (as approved in 2013). No Action and Limit level exceedance for 24-hour TSP was recorded in the reporting period.



### 3 NOISE

#### Monitoring Requirement

- 3.1 According to the EM&A Manual (AEIAR-174/2013), construction noise monitoring was conducted to monitor the construction noise arising from the construction activities. The regular monitoring frequency for each monitoring station shall be on a weekly basis and conduct one set of measurements between 0700 and 1900 hours on normal weekdays. **Appendix A** shows the established Action and Limit Levels for the environmental monitoring works.

#### Monitoring Locations

- 3.2 Noise monitoring was conducted at five designated monitoring stations, namely KTD1, KTD2d, KER1, CKL1 and CKL2 in the reporting period. **Table 3.1** and **Figure 2** show the locations of these stations.
- 3.3 The monitoring location at Kai Tak area has been reviewed and updated to obtain the data with higher representative based on several conditions, such as distance between monitoring location and the sensitive receiver, non-project related interference, obstruction to the construction works on site and the power supply problem. The monitoring location KTD1a and KER1b has been updated to KTD1 and KER1 respectively, where are the original location as proposed in the EM&A manual (AEIAR-174/2013). And the monitoring location KTD2c was remained unchanged after the aforementioned review. Monitoring location KTD2c was then further relocated to KTD2d after the review of status and location of monitoring station conducted in between February and March 2021.

**Table 3.1 Noise Monitoring Stations**

| Monitoring Stations | Location  |
|---------------------|---|
| KTD1                | Centre of Excellence in Paediatrics (Children's Hospital) |
| KTD2d               | Next to the SOR Office of Trunk Road T2 in Kai Tak Area   |
| KER1                | Future Residential Development at Kerry Godown            |
| CKL1                | Flat 121 Cha Kwo Ling Village                             |
| CKL2                | Flat 103 Cha Kwo Ling Village                             |

#### Monitoring Parameters, Frequency and Duration

- 3.4 **Table 3.2** summarizes the monitoring parameters, frequency and total duration of monitoring. The noise monitoring schedule is shown in **Appendix B**.

**Table 3.2 Frequency and Parameters of Noise Monitoring**

| Monitoring Stations | Time Period                            | Duration   | Frequency        | Parameter                          | Measurement            |
|---------------------|--|------------|------------------|------------------------------------|------------------------|
| KTD1                | 0700-1900 hrs<br>on normal<br>weekdays | 30 minutes | Once per<br>week | L <sub>10</sub> (30 min.)<br>dB(A) | Façade Measurement     |
| KTD2d               |  |            |                  |                                    | Free Field Measurement |
| KER1                |  |            |                  | L <sub>90</sub> (30 min.)<br>dB(A) | Free Field Measurement |
| CKL1                |  |            |                  | L <sub>eq</sub> (30 min.)<br>dB(A) | Free Field Measurement |
| CKL2                |  |            |                  |                                    | Free Field Measurement |

### Monitoring Equipment

- 3.5 Integrating Sound Level Meter was used for impact noise monitoring. The meters were Type 1 sound level meter capable of giving a continuous readout of the noise level readings including equivalent continuous sound pressure level ( $L_{eq}$ ) and percentile sound pressure level ( $L_x$ ) that also complied with International Electrotechnical Commission Publications 651:1979 (Type 1) and 804:1985 (Type 1) specifications. **Table 3.3** summarizes the noise monitoring equipment being used within the reporting period. Copies of calibration certificates are attached in **Appendix G**.

**Table 3.3 Noise Monitoring Equipment**

| Equipment                     | Model   | Quantity |
|-------------------------------|---|----------|
| Integrating Sound Level Meter | BSWA 308 (Serial no. 570187, 580156, 620091)<br>SVAN 957 (Serial no. 23851) | 4        |
| Calibrator                    | AWA6021A (Serial no.1023253, 1023064)                                       | 2        |

### Monitoring Methodology and QA/QC Procedure

- 3.6 The monitoring procedures are as follows:
- The monitoring station was normally be at a point 1m from the exterior of the sensitive receivers building façade and be at a position 1.2m above the ground.
  - For free field measurement, the meter was positioned away from any nearby reflective surfaces. All records for free field noise levels were adjusted with a correction of +3 dB(A).
  - The battery condition was checked to ensure the correct functioning of the meter.
  - Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:
    - Frequency weighting: A
    - Time weighting: Fast
    - Time measurement: 30 minutes
  - Prior to and after each noise measurement, the meter was calibrated using a Calibrator for 94.0 dB at 1000 Hz. If the difference in the calibration level before and after measurement

was more than 1.0 dB, the measurement would be considered invalid and repeat of noise measurement would be required after re-calibration or repair of the equipment.

- The wind speed was frequently checked with the portable wind meter.
- At the end of the monitoring period, the  $L_{eq}$ ,  $L_{90}$  and  $L_{10}$  were recorded. In addition, site conditions and noise sources were recorded on a standard record sheet.
- Noise monitoring would be cancelled in the presence of fog, rain, and wind with a steady speed exceeding 5 m/s, or wind with gusts exceeding 10 m/s. Supplementary monitoring would be provided to ensure sufficient data would be obtained.

### Maintenance and Calibration

- 3.7 The microphone head of the sound level meter and calibrator were cleaned with a soft cloth at quarterly intervals.
- 3.8 The sound level meter and calibrator were checked and calibrated at yearly intervals.
- 3.9 Immediately prior to and following each noise measurement the accuracy of the sound level meter was checked using an acoustic calibrator generating a known sound pressure level at a known frequency. Measurements were accepted as valid only if the calibration levels from before and after the noise measurement agree to within 1.0 dB.

### Results and Observations

- 3.10 Impact noise monitoring was conducted at five monitoring stations as scheduled. The monitoring schedule is shown in **Appendix B**. No Action and Level exceedance was recorded for day time construction noise monitoring in the reporting month.
- 3.11 Noise monitoring results and graphical presentations are shown in **Appendix H**.
- 3.12 According to field observations observed in the reporting period, the major noise sources identified at the noise monitoring stations are shown in **Table 3.4**.

**Table 3.4 Other Noise Source Identified during Noise Monitoring**

| Monitoring Stations | Major Noise Source  |
|---------------------|---|
| KTD 1               | <ul style="list-style-type: none"> <li>• Project related construction activities (Loading and unloading of C&amp;D waste, travel of vehicles, use of PME and other plants, and other construction activities);</li> <li>• Vehicle movement in the site;</li> <li>• Road traffic along Shing Cheong Road; and,</li> <li>• Non-project related construction activities at the nearby construction site of New Acute Hospital.</li> </ul>  |
| KTD 2d              | <ul style="list-style-type: none"> <li>• Project related construction activities (Loading and unloading of C&amp;D waste, travel of vehicles, use of PME and other plants, and other construction activities);</li> <li>• Vehicle movement in the site; and,</li> <li>• Non-project related construction activities. (i.e excavating work, Loading and unloading of C&amp;D wastes at the nearby construction site of Additional District Cooling System at Kai Tak Development, Paul Y. Engineering.)</li> </ul> |

| Monitoring Stations | Major Noise Source  |
|---------------------|---|
| KER 1               | <ul style="list-style-type: none"> <li>Road traffic along Kai Hing Road.</li> <li>Project related construction activities (Travel of vehicles, use of PME and other plants, and other construction activities)</li> </ul> |
| CKL1                | <ul style="list-style-type: none"> <li>Road traffic along Cha Kwo Ling Road.</li> </ul>   |
| CKL2                | <ul style="list-style-type: none"> <li>Road traffic along Cha Kwo Ling Road</li> </ul>  |

3.13 The baseline noise level and the Noise Limit Level at each designated noise monitoring station are presented in **Table 3.5**.

**Table 3.5 Baseline Noise Level and Noise Limit Level for Monitoring Stations**

| Monitoring Stations | Baseline Noise Level, dB (A)<br>(at 0700 – 1900 hrs on normal weekdays) | Noise Limit Level, dB (A)<br>(at 0700 – 1900 hrs on normal weekdays) |
|---------------------|---|--|
| KTD1                | 78  | 75   |
| KTD2d               | 64  |  |
| KER1                | 65  |  |
| CKL1                | 72.4  |  |
| CKL2                | 71.4  |  |

### Comparison of EM&A Result with EIA Prediction

3.14 The noise monitoring data was compared with the predictions in Table 5.13 of EIA Report (AEIAR-174/2013) as summarised in **Table 3.6**.

**Table 3.6 Maximum Predicted Mitigated Construction Noise Levels in EIA Report**

| Monitoring Stations  | NSR ID             | Maximum Predicted Mitigated Construction Noise Levels in EIA Report (AEIAR-174/2013), dB(A) | Maximum Construction Noise Levels in the Reporting Month (July 2025), Leq (30min) dB(A) |
|--|--------------------|---|---|
| KTD1 - Centre of Excellence in Paediatrics (Children's Hospital) | KTD1               | 74  | 73.9  |
| KTD2d – Next to the SOR Office of Trunk Road T2 in Kai Tak Area  | N/A <sup>(1)</sup> | N/A <sup>(1)</sup>  | 68  |
| KER1 – Future Residential Development at Kerry Godown            | KER1               | 75  | 74  |
| CKL1 - Flat 121 Cha Kwo Ling Village                             | CKL4               | 71  | 74  |
| CKL2 - Flat 103 Cha Kwo Ling Village                             | CKL5               | 69  | 74  |

Remarks:

(1): No Maximum Predicted Mitigated Construction Noise Levels was predicted in EIA Report (AEIAR-174/2013)

- 3.15 The result at CKL1, CKL2 were higher than the maximum predicted mitigated construction noise level in the EIA Report, AEIAR-174/2013 (as approved in 2013), this may be due to fluctuations of traffic flow along Cha Kwo Ling Road. Besides, the result at KTD1 and KER1 were lower than the maximum predicted mitigated construction noise level in the EIA Report. No Action and Limit Level exceedance were recorded in the reporting period.

## 4 WATER QUALITY

### Monitoring Requirement

- 4.1 According to Section 4.3.1.1 of EM&A Manual (AEIAR-174/2013), no water quality monitoring is required during the construction phase.
- 4.2 According to Section 4.3.1.5 of EM&A Manual (AEIAR-174/2013), compliance site audits are to be undertaken by the Engineer and ET and escorted by the Contractor to ensure that a valid discharge license has been issued by the EPD prior to the discharge of the effluent from the construction activities of the Project site. Monitoring of the quality of the treated effluent from the works areas should be carried out in accordance with the Water Pollution Control Ordinance (WPCO) license. The audit results reflect whether the effluent quality is in compliance with the discharge license requirements, the summaries of site audits are attached in **Appendix I**.
- 4.3 In the event of non-compliance, the responsibilities of the relevant parties are detailed in the Event / Action plan attached in **Appendix J**.

## 5 MARINE ECOLOGY

- 5.1 According to Section 5.3.1.1 of EM&A Manual (AEIAR-174/2013), ET will be required to undertake audit of good site practice for habitat protection as detailed below. The summaries of site audits are attached in **Appendix I**.
- Avoid damage and disturbance to the remaining and surrounding natural habitat;
  - Ensure placement of equipment is within designated areas within the existing disturbed land;
  - Ensure construction activities are restricted to within the proposed works boundary;
  - Ensure spoil heaps are covered at all times;
  - Ensure that disturbed areas are reinstated immediately after completion of the works; and
  - Ensure enhancement planting works undertaken.

## 6 FISHERIES

- 6.1 According to Section 6.3.1.2 of EM&A Manual (AEIAR-174/2013), no specific fisheries monitoring and audit programme is required during the construction phase.
- 6.2 The implementation of the water quality mitigation measures stated in the Water Quality Impact Assessment (Refer to Section 6 of the EIA Report (AEIAR-174/2013)) will be audited as part of the EM&A procedures during the construction period and the details are presented in **Section 4.2** of this Report. The summaries of site audits are attached in **Appendix I**.

## 7 LANDSCAPE AND VISUAL

- 7.1 According to the EM&A Manual (AEIAR-174/2013), a series of mitigation measures were recommended to ameliorate the landscape and visual impacts of the Project. The mitigation measures for construction stage are summarized in **Table 7.1** below and provided in **Appendix K**:

**Table 7.1 Construction Phase Landscape and Visual Mitigation Measures**

| ID No. | Landscape and Visual Mitigation Measure   |
|--------|---|
| CM1    | All works shall be carefully designed to minimize impacts on existing landscape resources and visually sensitive receivers. Existing trees within works area shall be retained and protected.   |
| CM2    | Existing trees of good quality and condition that are unavoidably affected by the works should be transplanted.   |
| CM3    | Not used.   |
| CM4    | Not used.   |
| CM5    | Large temporary stockpiles of excavated material shall be covered with unobtrusive sheeting to prevent dust and dirt spreading to adjacent landscape areas and vegetation, and to create a neat and tidy visual appearance.                         |
| CM6    | Construction plant and building material shall be orderly and carefully stored in order to create a neat and tidy visual appearance   |
| CM7    | Erection of decorative screen hoarding should be designed to be compatible with the existing urban context.   |
| CM8    | All lighting in construction site shall be carefully controlled to minimize light pollution and night-time glare to nearby residences and GIC user. The contractor shall consider other security measures, which shall minimize the visual impacts. |

- 7.2 A specialist Landscape Sub-Contractor should be employed by the Contractor for the implementation of landscape construction works and subsequent maintenance operations during the establishment period. It is proposed that the planting works will be on-site and the planting should be completed during the construction contract. The monitoring of the planting establishment should be undertaken for a 12-month period which could extend throughout the Contractor's one-year maintenance period, which will be within the first operational year of the Project.
- 7.3 All measures undertaken by both the Contractor and the specialist Landscape Sub-Contractor during the construction phase and first year of the operational phase shall be audited by a Registered Landscape Architect (RLA), as a member of the Environmental Team (ET), on a regular basis to ensure compliance with the intended aims of the measures. To fulfil the aforementioned requirements, on-site landscape and visual mitigation measures were audited by RLA in the reporting month.
- 7.4 According to Section 7.3.1.2 of the EM&A Manual (AEIAR-174/2013), site audits shall be undertaken at least once every two weeks throughout the construction period to monitor and audit the timely implementation of landscape and visual mitigation measures within the site boundaries of this Project.
- 7.5 The broad scope of the audit is detailed below but should also be undertaken with reference to the more specific checklist provided in **Table 7.2**. The summaries of site audits are attached in **Appendix I**:
- The extent of the agreed works areas should be regularly checked during the construction phase. Any trespass by the Contractor outside the limit of the works, including any damage to existing trees and soft landscape areas shall be prohibited;
  - the progress of the engineering works should be regularly reviewed on site to identify the earliest practical opportunities for the landscape works to be undertaken;
  - all existing trees and vegetation within the study area which are not directly affected by the works are retained and protected;
  - the methods of protecting existing vegetation proposed by the Contractor are acceptable and enforced;
  - preparation, lifting transport and re-planting operations for any transplanted trees;
  - all landscaping works are carried out in accordance with the specifications;
  - the planting of new trees, shrubs, groundcover, climbers, ferns, grasses and other plants, together with the replanting of any transplanted trees are carried out properly and within the right season; and
  - all necessary horticultural operations and replacement planting are undertaken throughout the Establishment Period to ensure the healthy establishment and growth of both transplanted trees and all newly established plants.

**Table 7.2 Construction Phase Audit Checklist for Landscape and Visual Mitigation Measures**

| Area of Works  | Items to be Monitored  |
|--|--|
| Advance planting   | Monitoring of implementation and maintenance of planting, and against possible incursion, physical damage, fire, pollution, surface erosion, etc.  |
| Protection of all trees and existing soft landscape areas to be retained | Identification and demarcation of trees / vegetation to be retained, erection of physical protection (e.g. fencing), monitoring against possible incursion, physical damage, fire, pollution, surface erosion, etc.                                    |
| Clearance of existing vegetation   | Identification and demarcation of trees / vegetation to be cleared, checking of extent of works to minimise damage, monitoring of adjacent areas against possible incursion, physical damage, fire, pollution, surface erosion, etc.                   |
| Pruning of trees   | Identification and demarcation of trees / vegetation to be pruned, monitoring of extent of pruning to minimise damage, timing of operations, implementation of all stages of preparatory and pruning works, and maintenance of pruned vegetation, etc. |
| Plant supply   | Monitoring of operations relating to the supply of specialist plant material (including the collecting, germination and growth of plants from seed) to ensure that plants will be available in time to be used within the construction works.          |
| Soiling, planting, etc.  | Monitoring of implementation and maintenance of soiling and planting works and against possible incursion, physical damage, fire, pollution, surface erosion, etc.   |
| Site fencing and hoarding  | Implementation and maintenance, to ensure compliance with agreed designs and check that it matches the surrounding environment and does not cause visual intrusion.  |
| Architectural treatment of engineering works.                            | Implementation and maintenance of mitigation measures, to ensure compliance with agreed designs as applicable.   |
| Establishment Works  | Monitoring of implementation of maintenance operations during Establishment Period.  |

- 7.6 In the event of non-compliance, the responsibilities of the relevant parties are detailed in the Event / Action plan attached in **Appendix J**.
- 7.7 In the reporting month, no non-compliance of the landscape and visual mitigation measures was recorded by RLA.



## 8 CULTURAL HERITAGE

- 8.1 According to Section 8.3.1.1 of EM&A Manual (AEIAR-174/2013), as a precautionary measure, it is recommended that if any antiquity or supposed antiquity is discovered during the course of the excavation works undertaken by the Contractor, the discovery shall be reported to the AMO immediately and all necessary measures taken to preserve it.
- 8.2 According to Section 8.3.1.2 of EM&A Manual (AEIAR-174/2013), no EM&A is required during the construction and operational phase.

## 9 WASTE MANAGEMENT

- 9.1 According to Section 9.3.1.1 of EM&A Manual (AEIAR-174/2013), the effective management of waste arisings during the construction phase will be monitored through the site audit programme. Regular audits and site inspections should be carried out by the Engineer, ET and Contractor to ensure that the recommended good site practices and other mitigation measures are implemented by the Contractor. The summaries of site audits are attached in **Appendix I**.
- 9.2 According to Sections 9.3.1.3 and 9.3.1.4 of EM&A Manual (AEIAR-174/2013), documents including licenses, permits, disposal and recycling records should be reviewed and audited during site audits for the compliance with the legislation and contract requirements to ensure proper records are being maintained and procedures undertaken in accordance with the Waste Management Plan.
- 9.3 With reference to the relevant handing records of this Project, the quantities of different types of waste generated in the reporting month are summarized and presented in the **Appendix O**.

**10 ENVIRONMENTAL AUDIT****Site Audits**

10.1 Site audits were carried out on a weekly basis to monitor the timely implementation of proper environmental management practices and mitigation measures in the Project site. The summaries of site audits are attached in **Appendix I**.

10.2 Site audits for each contract were conducted as follows.

- ED/2018/04 – Site audit was conducted on 03, 10, 17, 24 & 31 July 2025 in the reporting month. Site inspection of the IEC was conducted on 31 July 2025. No non-compliances were observed during site audits.
- ED/2020/03 – Site audit was conducted on 03, 11, 17, 24 & 31 July 2025 in the reporting month. Site inspection of the IEC was conducted on 11 July 2025. No non-compliance was observed during the site audits.

**Implementation Status of Environmental Mitigation Measures**

10.3 According to Environmental Permits, the approved EIA Reports (Register No.: AEIAR-174/2013 and AEIAR-173/2013), and the EM&A Manuals of the Project (AEIAR-174/2013 and AEIAR-173/2013), the mitigation measures detailed in the documents are recommended to be implemented during the construction phase. An Environmental Mitigation Implementation Schedule (EMIS) is provided in **Appendix K**.

10.4 The ET weekly site inspections were carried out during the reporting month and the observations and recommendations are summarized in **Table 10.1**. Refer to **Appendix I** for the site inspection summary reports in the reporting month.

**Table 10.1 Observations and Recommendations of Site Audit**

| Parameters                        | Date         | Observations and Recommendations  | Follow-up                                      |
|-----------------------------------|--------------|---|--|
| <i>Air Quality</i>                | 26 June 2025 | NRMM Label should be update on PME.   | NRMM Label was updated on PME.                 |
| <i>Noise</i>                      | N/A          | There was no observation in the reporting period.   | N/A  |
| <i>Water Quality</i>              | N/A          | There was no observation in the reporting period.   | N/A  |
| <i>Ecology</i>                    | N/A          | There was no observation in the reporting period.   | N/A  |
| <i>Landscape and Visual</i>       | N/A          | There was no observation in the reporting period.   | N/A  |
| <i>Waste/ Chemical Management</i> | 31 July 2025 | Drip tray should be provided to the chemical container to avoid potential chemical leakage. | To be followed up in the next reporting month. |

| Parameters               | Date | Observations and Recommendations                  | Follow-up |
|--------------------------|------|---|-----------|
| <i>Permits /Licences</i> | N/A  | There was no observation in the reporting period. | N/A       |

### Implementation Status of Event and Action Plans

10.5 The Event and Action Plans for air quality, construction noise, and landscape and visual are presented in **Appendix J**.

#### *Air Quality Monitoring*

- No Action and no Limit Level exceedance for 24-hour TSP monitoring was recorded.

#### *Construction Noise Monitoring*

- No Action and Limit Level exceedance was recorded in the reporting month.

#### *Landscape and Visual*

- No landscape and visual non-conformity were recorded.

### Status of Required Submission under Environmental Permit

10.6 According the Section 11.3.2.1 (c) of the EM&A Manual (AEIAR-174/2013), status of required submission under EP-451/2013 during the reporting period are summarized in **Table 10.2**.

**Table 10.2 Status of Required Submission under Environmental Permit**

| EP Condition       | Submission  | Submission Date  |
|--------------------|---|------------------|
| EP-451/2013        |   |                  |
| Condition 2.3      | Management Organization of Main Construction Companies for ED/2018/04 | 20 January 2020  |
| Condition 2.3      | Management Organization of Main Construction Companies for ED/2020/03 | 21 March 2023    |
| Condition 2.4      | Design Drawing of the Project   | 20 January 2020  |
| Condition 2.5      | Landscape Mitigation Plan (Rev. F)                                    | 25 November 2022 |
| Condition 2.10 (a) | Supplementary Contamination Assessment Plan                           | 18 December 2015 |
| Condition 2.10 (b) | Supplementary Contamination Assessment Report                         | 6 December 2016  |
| Condition 3.3      | Updated Baseline Monitoring Report                                    | 3 November 2020  |
| Condition 3.4      | Monthly EM&A Report (June 2025) for ED/2018/04 and ED/2020/03         | 11 July 2025     |

**11 ENVIRONMENTAL NON-CONFORMANCE****Summary of Complaint, Warning, Notification of any Summons and Successful Prosecution**

- 11.1 The summaries of environmental complaint, warning, summon and notification of successful prosecution for the Project is presented in **Appendix L**.

**Summary of Exceedance**

- 11.2 The summary of exceedance record in the reporting month is shown in **Appendix M**.
- 11.3 No non-conformity was recorded for landscape and visual inspections conducted in the reporting month.

**12 FUTURE KEY ISSUES**

- 12.1 Tentative construction programmes for the next three months are provided in **Appendix N**.
- 12.2 Major site activities undertaken for the coming months and the key environmental issues are summarized as follows:

**Table 12.1 Summary Table for Site Activities and the Key Environmental Issues in the next Reporting Period**

| Contract No. and Project Title   | Site Activities (August 2025)  | Key Environmental Issues  |
|--|--|---|
| ED/2018/04 - Trunk Road T2 and Infrastructure Works for Developments at South Apron              | <ul style="list-style-type: none"> <li>• WVB – E&amp;M works</li> <li>• WVB – External works</li> <li>• DPR – Parapet installation</li> <li>• DPR – Sign gantry erection</li> <li>• SUS – E&amp;M works</li> <li>• LSCC – RC Structure</li> <li>• LSCC – Backfilling</li> <li>• WB – TBM Tunnelling</li> <li>• TSS – WB internal structure from CP22 to CP26</li> <li>• TSS – EB internal structure up to CP22</li> <li>• CP – TSS WB Tympanum construction</li> </ul> | <ul style="list-style-type: none"> <li>• Dust generation from haul road, stockpile of dusty materials, exposed site area and excavation works;</li> <li>• Noisy construction activity such as breaking and drilling activities</li> <li>• Runoff from exposed slope or site area;</li> <li>• Wastewater and runoff discharge from site; and</li> <li>• Accumulation of construction and general waste.</li> </ul> |
| ED/2020/03 - Trunk Road T2 - Traffic Control And Surveillance System (TCSS) and Associated Works | <ul style="list-style-type: none"> <li>• Installation of TCSS equipment at CKR Gantry G42, WVB, SUS, Tunnel (CP7 - CP21)</li> </ul>  | <ul style="list-style-type: none"> <li>• Accumulation of construction and general waste.</li> </ul>   |

**Monitoring Schedule**

- 12.3 The tentative environmental monitoring schedule for the next three months are shown in **Appendix B**.

**13 CONCLUSIONS AND RECOMMENDATIONS****Conclusions**

- 13.1 This is the 65<sup>th</sup> Monthly EM&A Report which presents the EM&A works undertaken during the reporting month in accordance with the EM&A Manual (AEIAR-174/2013) and the requirement under EP.

Air Quality Monitoring

- 13.2 No Action and no Limit Level exceedance was recorded for 1-hour TSP monitoring in the reporting month.
- 13.3 No Action and no Limit Level exceedance was recorded for 24-hour TSP monitoring in the reporting month.

Construction Noise Monitoring

- 13.4 No Limit Level exceedance was recorded for day-time construction noise monitoring in the reporting month.
- 13.5 No Action Level exceedance was recorded in the reporting month.

Site Audit

- 13.6 Five (5) ET joint weekly environmental site inspections were conducted for the Contact No. ED/2018/04 in the reporting month.
- 13.7 Five (5) ET joint environmental site inspections were conducted for the Contact No. ED/2020/03 in the reporting month.

Complaint, Notification of Summons and Successful Prosecution

- 13.8 One (1) environmental complaint was received in the reporting month. No notifications of summons and successful prosecutions were received in the reporting month.

**Recommendations**

- 13.9 According to the environmental audit performed in the reporting month, the following recommendations was made:

ED/2018/04*Waste Management*

- Drip tray should be provided to the chemical container to avoid potential chemical leakage.

---


---

## FIGURES


---

---



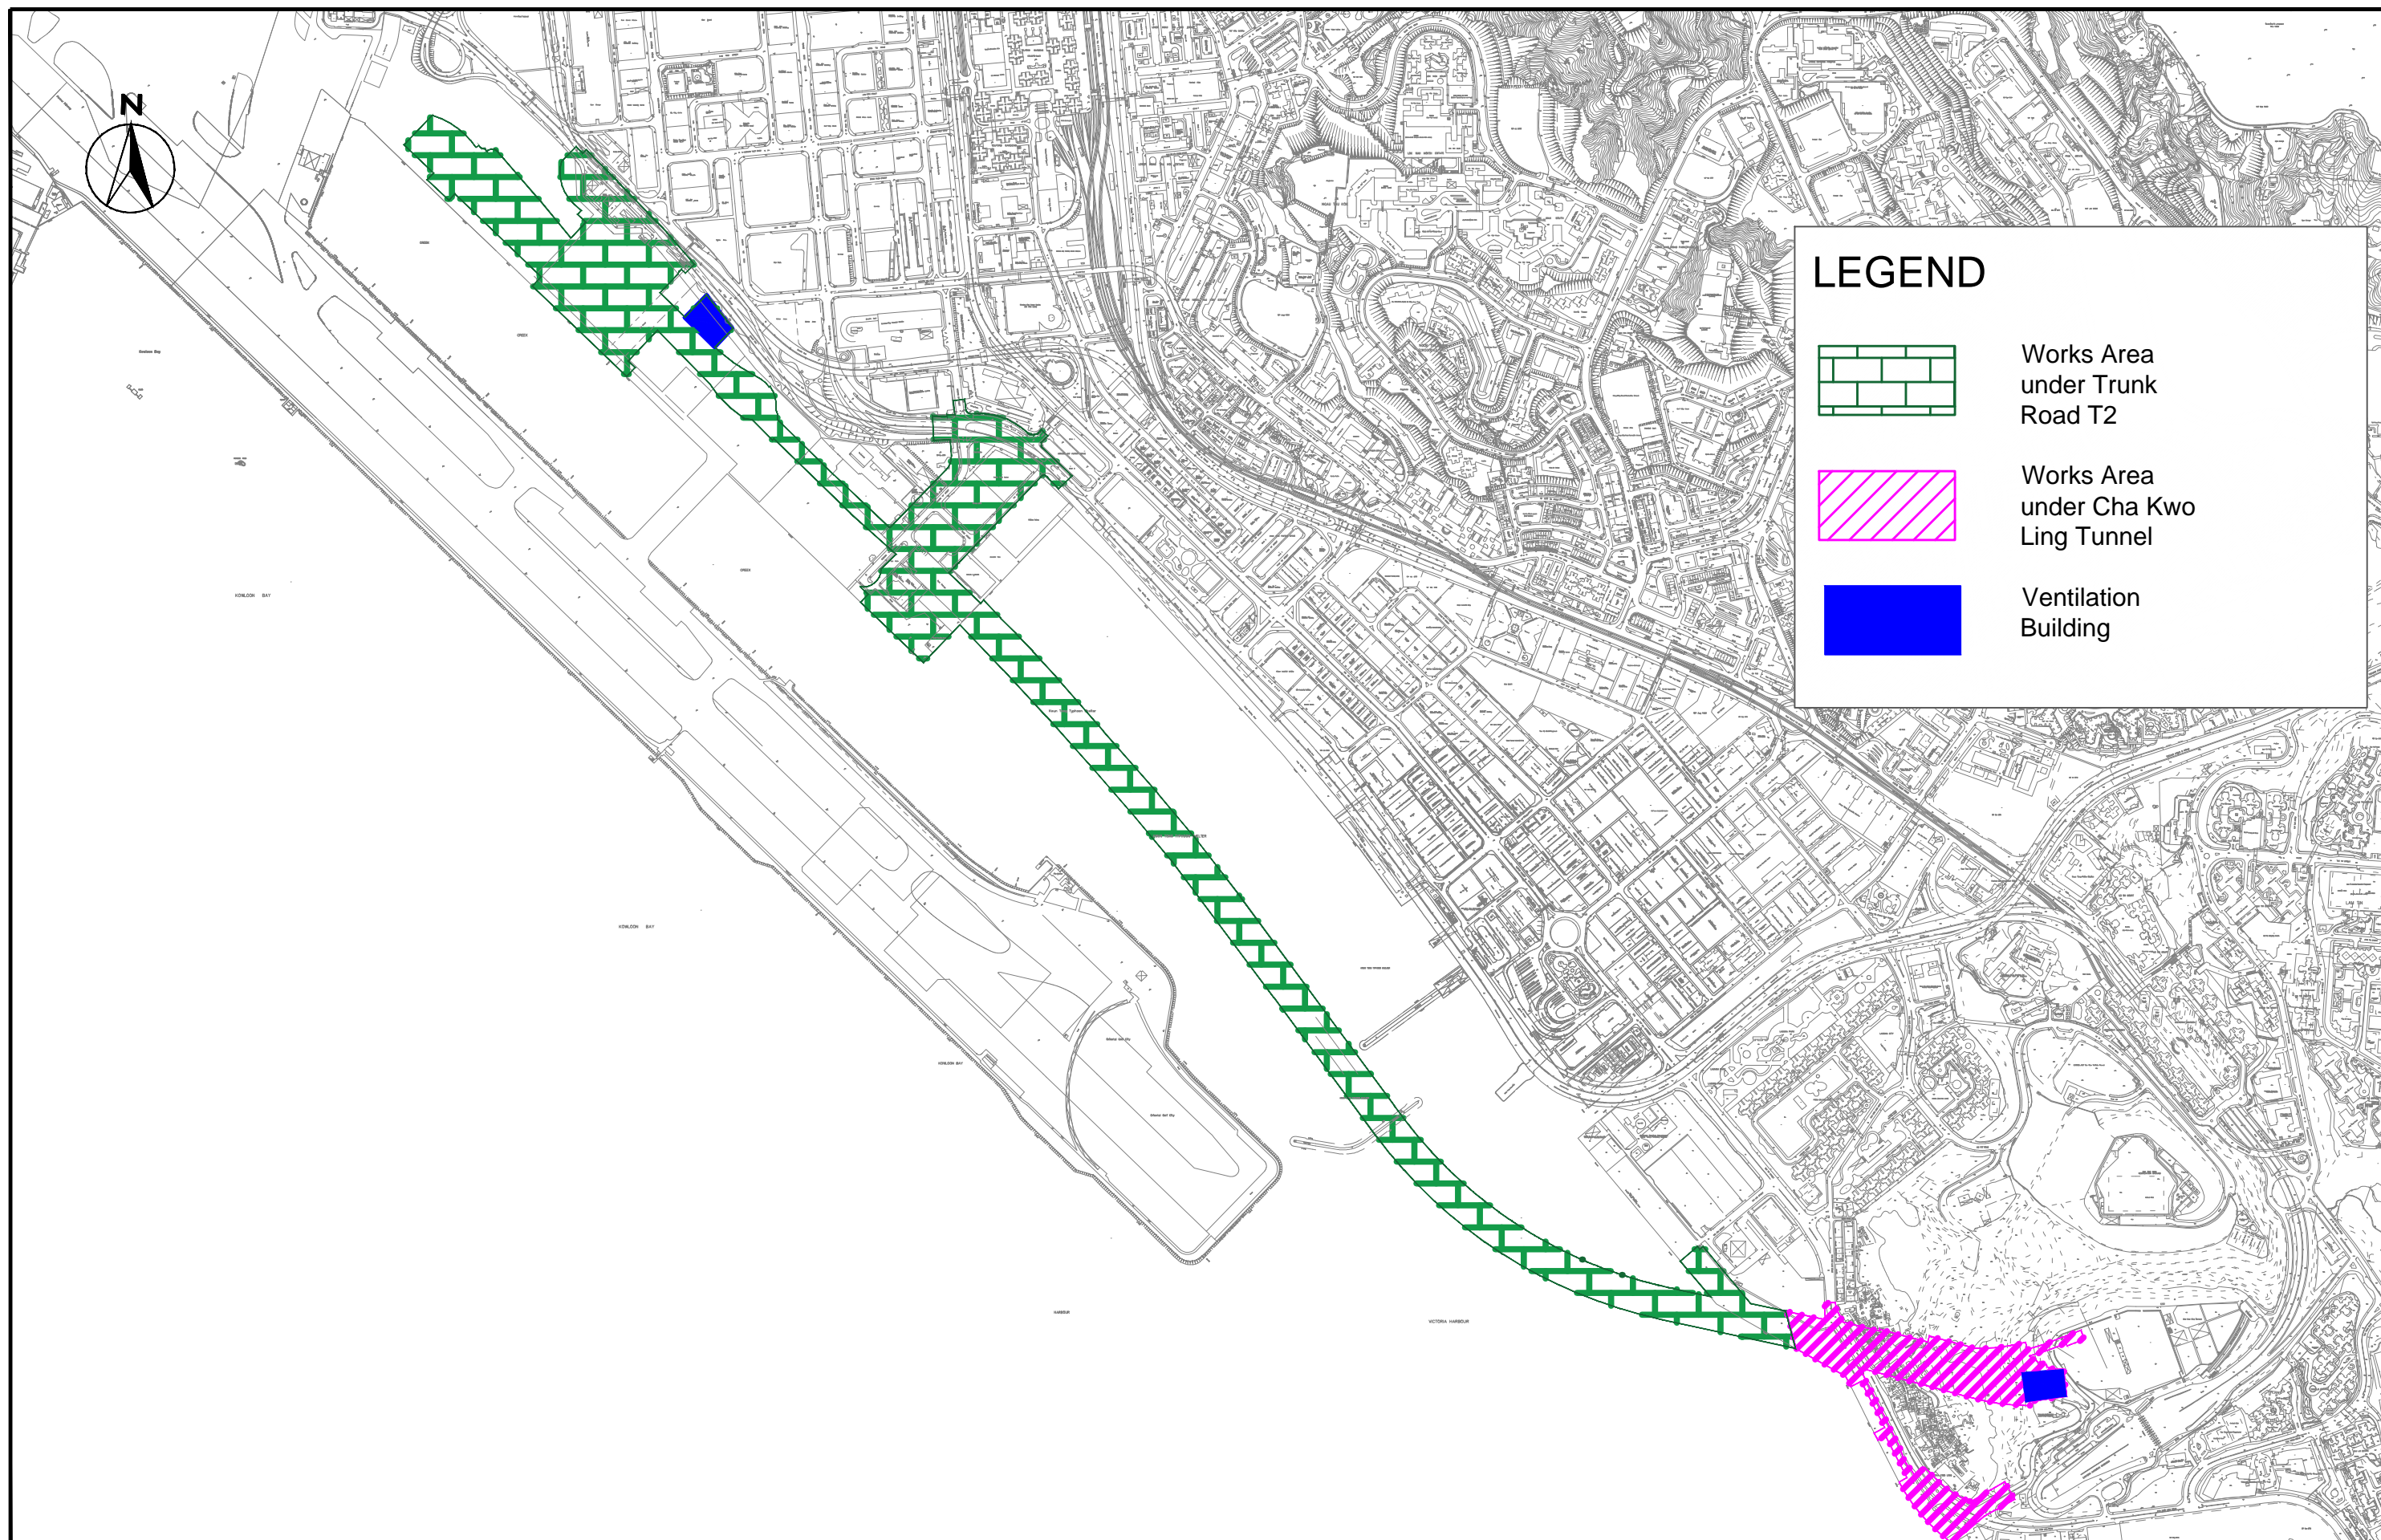




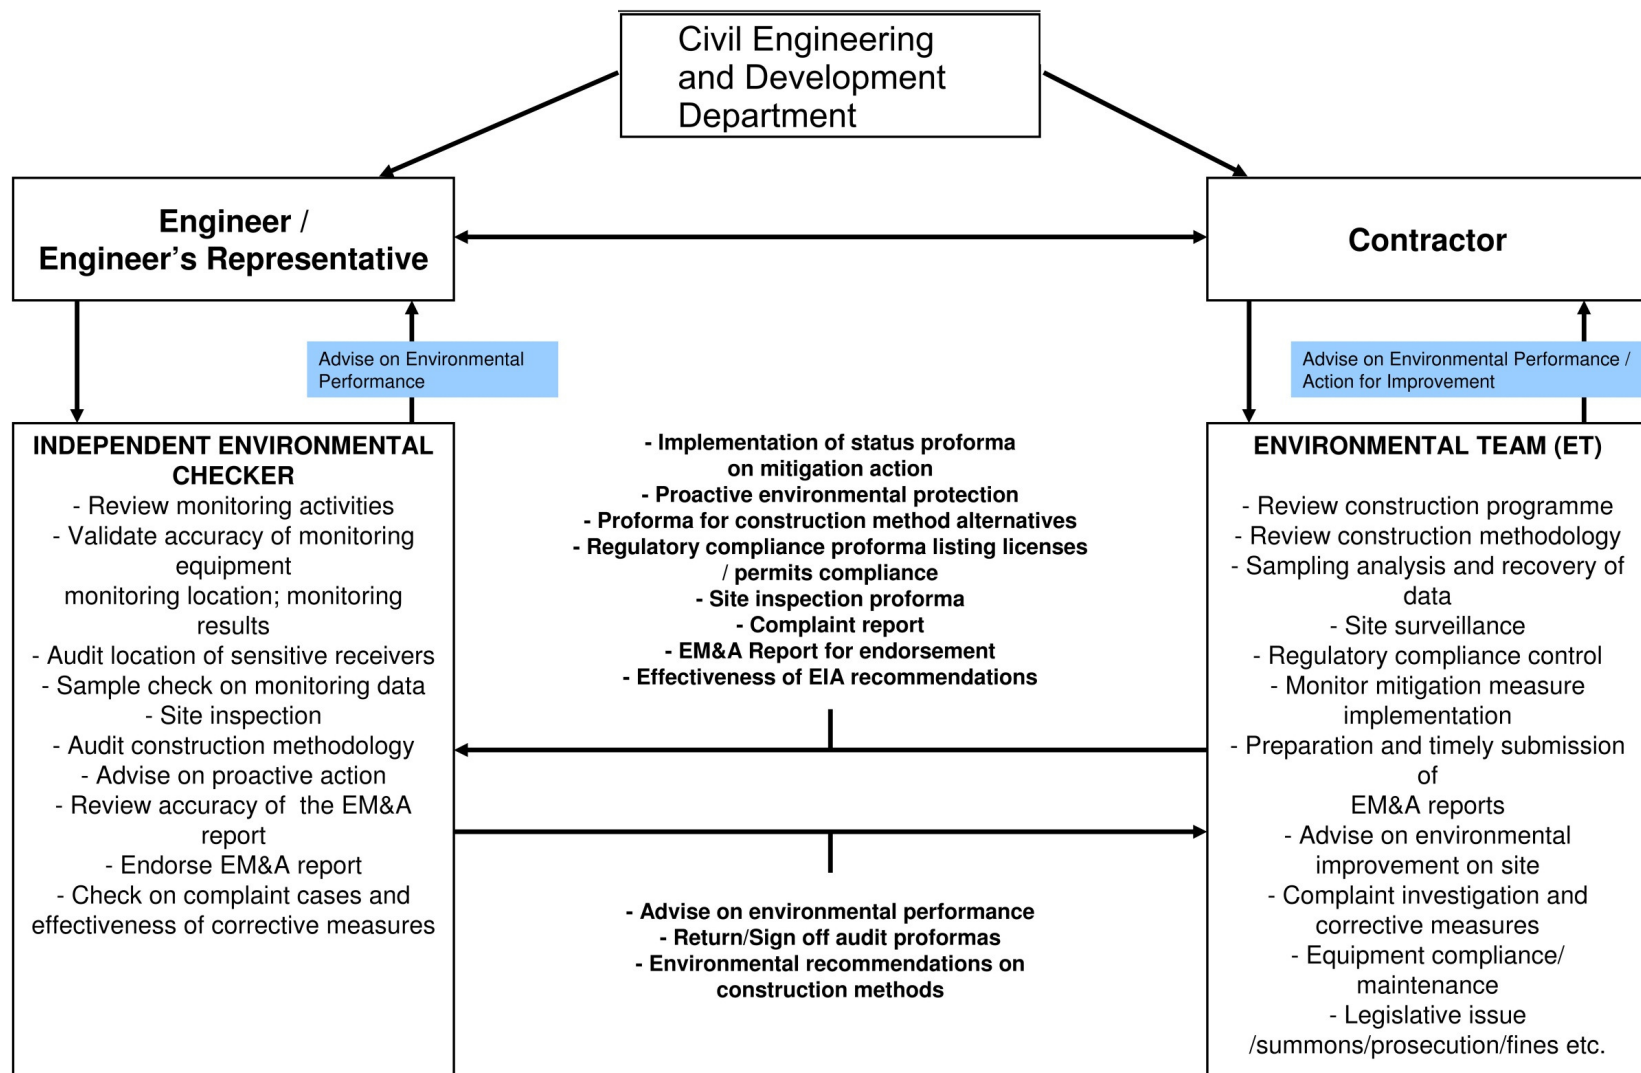

|   |             |      |                      |    |             |       |      |             |
|---|-------------|------|----------------------|----|-------------|-------|------|-------------|
| Drawing title                                   |             |      | Original Size        | A3 | Scale       | N.T.S | Date | 18/JAN/2013 |
| PROJECT ORGANISATION AND LINES OF COMMUNICATION |             |      | File name            |    | Drawing No. |       |      |             |
| Rev.  | Description | Date | © Copyright reserved |    | FIGURE 1.2  |       |      | Rev.        |
|   |             |      |                      |    |             |       |      | -           |




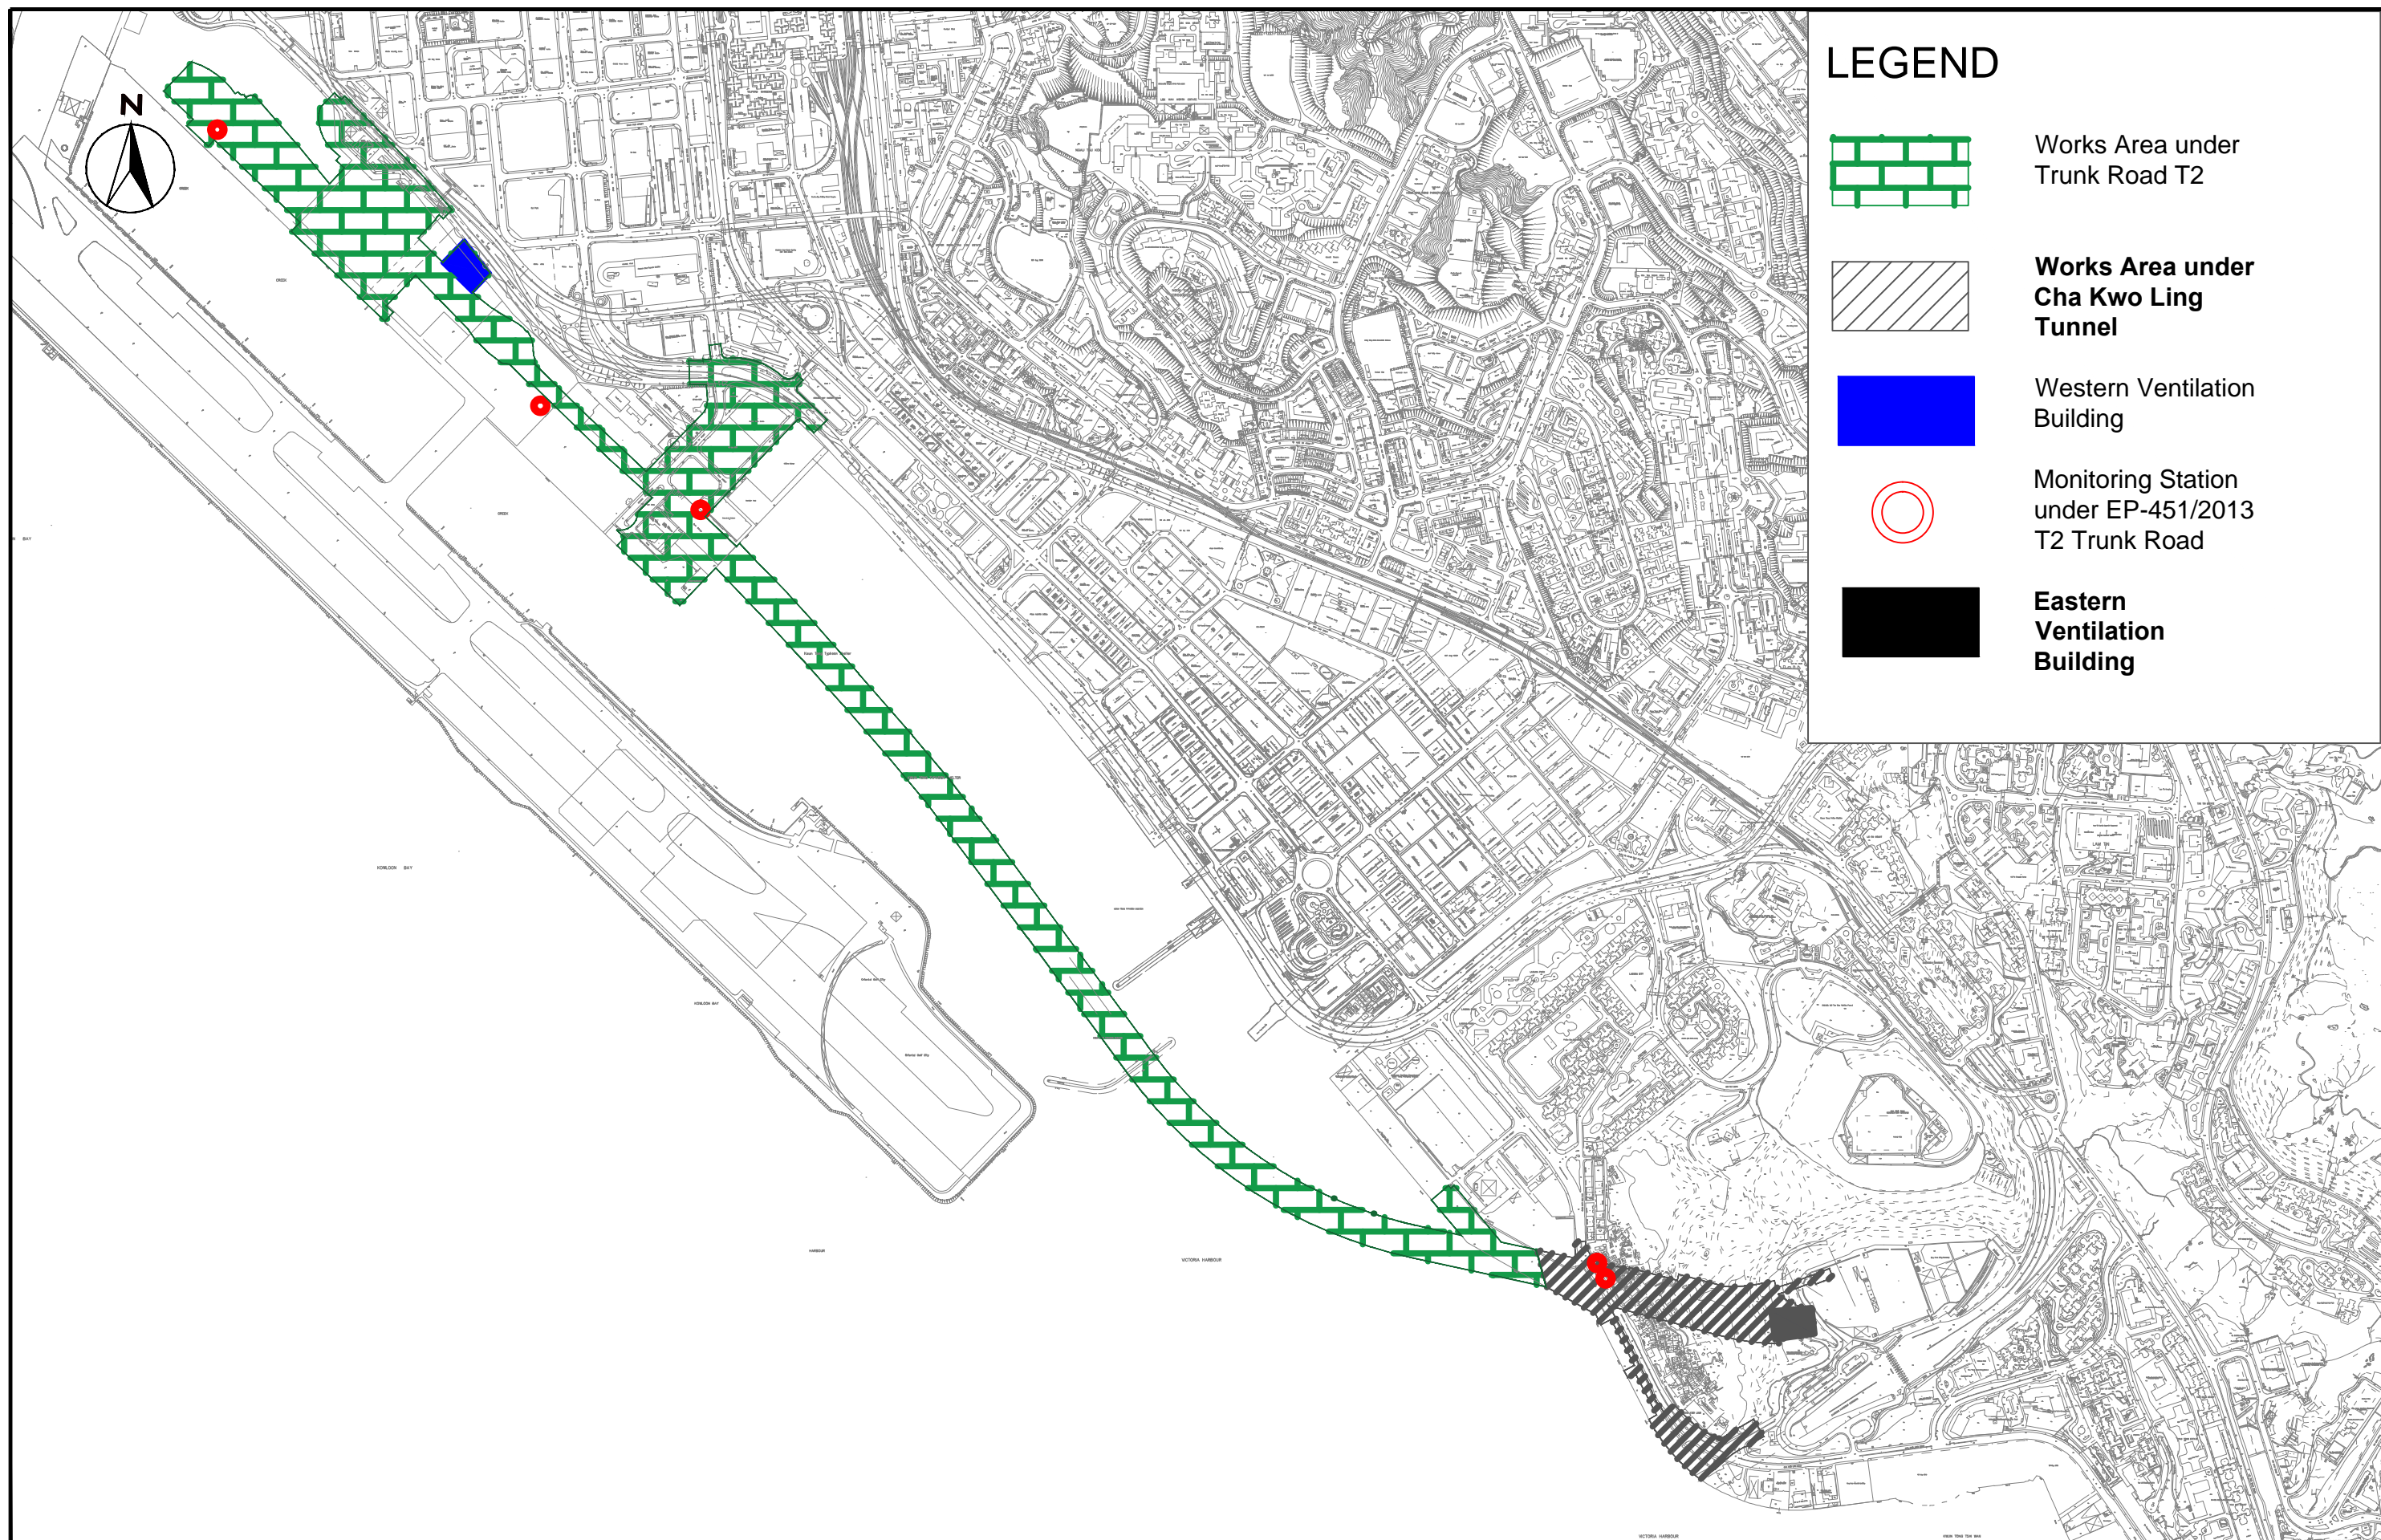







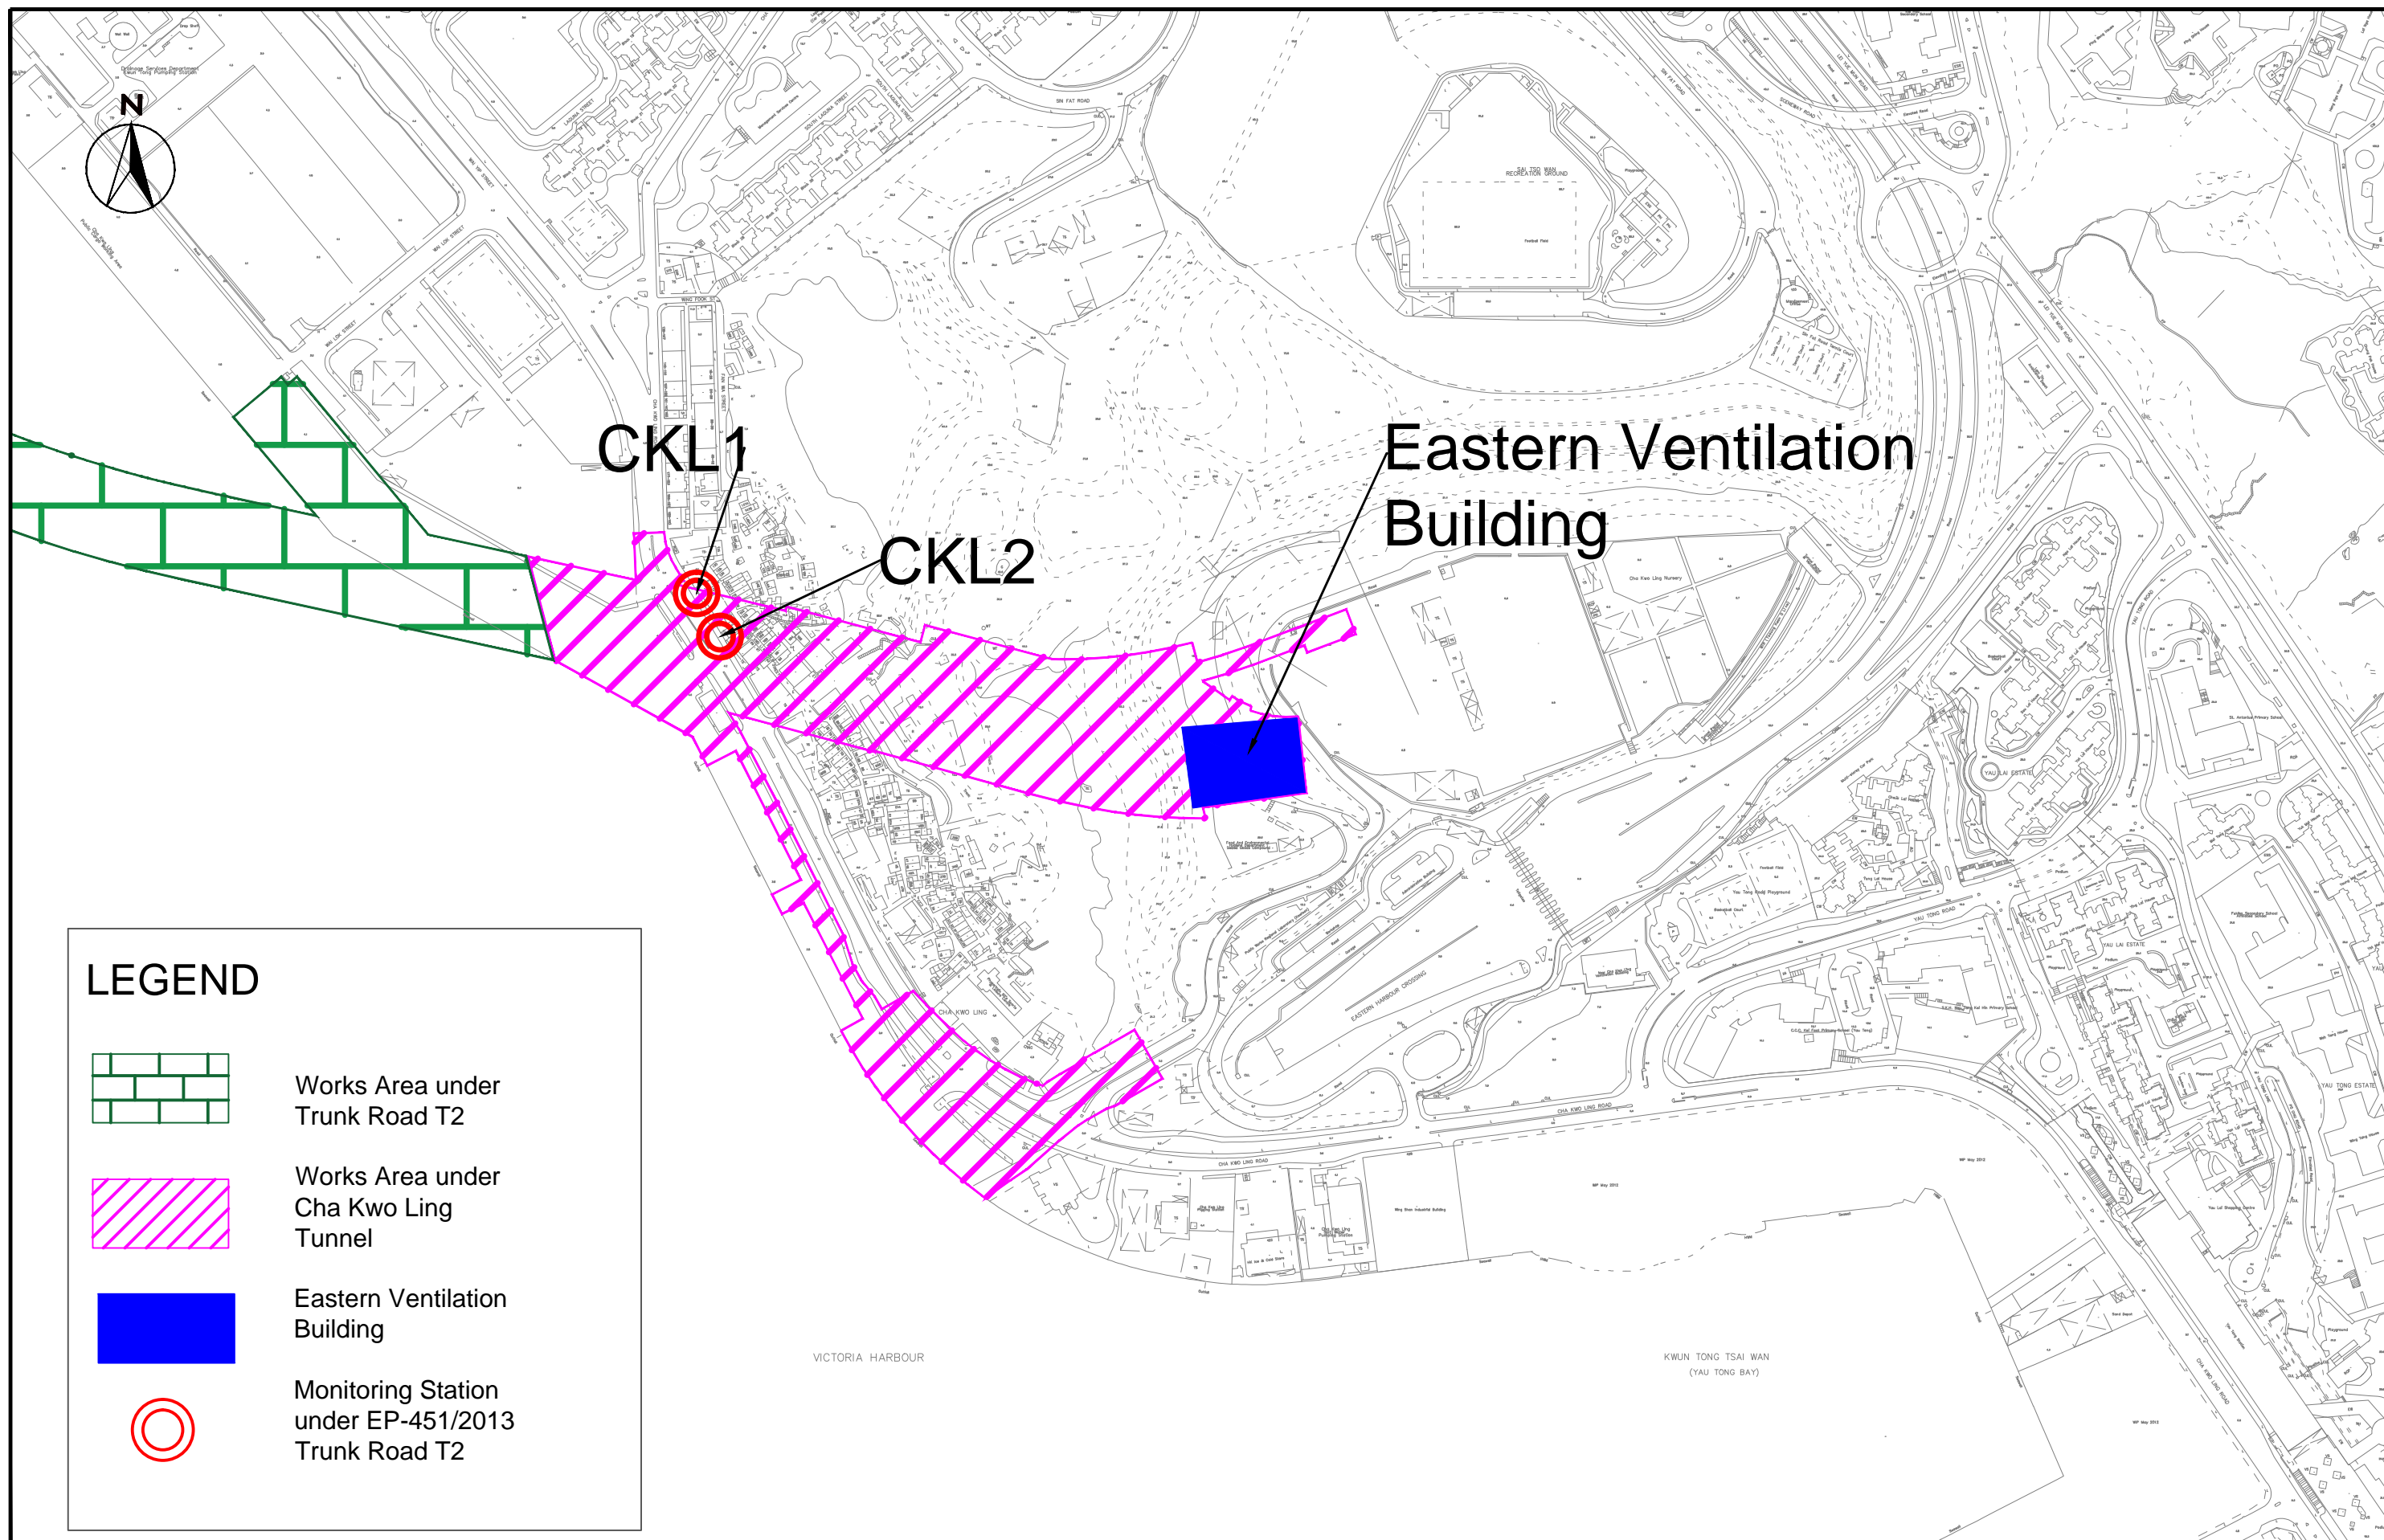

---

---

**APPENDIX A**  
**ACTION AND LIMIT LEVELS**

---

---

## Appendix A - Action and Limit Levels

**Table A-1 Action and Limit Levels for 1-hour TSP (in case of complaints)**

| Location | Action Level, $\mu\text{g}/\text{m}^3$ | Limit Level, $\mu\text{g}/\text{m}^3$ |
|----------|--|---------------------------------------|
| KTD1     | 285                                    | 500                                   |
| KTD2d    | 279                                    |                                       |
| KER1     | 295                                    |                                       |
| CKL1     | 323                                    |                                       |
| CKL2     | 327                                    |                                       |

**Table A-2 Action and Limit Levels for 24-hour TSP**

| Location | Action Level, $\mu\text{g}/\text{m}^3$ | Limit Level, $\mu\text{g}/\text{m}^3$ |
|----------|--|---------------------------------------|
| KTD1     | 177                                    | 260                                   |
| KTD2d    | 157                                    |                                       |
| KER1     | 172                                    |                                       |
| CKL1     | 191                                    |                                       |
| CKL2     | 183                                    |                                       |

**Table A-3 Action and Limit Levels for Noise during Construction Period**

| Time Period                      | Action Level                              | Limit Level             |
|----------------------------------|---|-------------------------|
| 0700-1900 hrs on normal weekdays | When one documented complaint is received | 75 dB(A) <sup>(1)</sup> |

Note:

(1) If works are to be carried out during restricted hours, the conditions stipulated in the Construction Noise Permit (CNP) issued by the Noise Control Authority have to be followed.

---

**APPENDIX B  
ENVIRONMENTAL MONITORING  
SCHEDULES**

---

**Contract No. ED/2018/04**  
**Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron**  
**Impact Air and Noise Monitoring Schedule (July 2025)**

| Sunday | Monday    | Tuesday   | Wednesday | Thursday  | Friday | Saturday  |
|--------|-----------|-----------|-----------|-----------|--------|-----------|
|        |           | 1-Jul     | 2-Jul     | 3-Jul     | 4-Jul  | 5-Jul     |
|        |           |           | 24-hr TSP |           | Noise  |           |
| 6-Jul  | 7-Jul     | 8-Jul     | 9-Jul     | 10-Jul    | 11-Jul | 12-Jul    |
|        |           | 24-hr TSP | Noise     |           |        |           |
| 13-Jul | 14-Jul    | 15-Jul    | 16-Jul    | 17-Jul    | 18-Jul | 19-Jul    |
|        | 24-hr TSP | Noise     |           |           |        | 24-hr TSP |
| 20-Jul | 21-Jul    | 22-Jul    | 23-Jul    | 24-Jul    | 25-Jul | 26-Jul    |
|        | Noise     |           |           | 24-hr TSP |        |           |
| 27-Jul | 28-Jul    | 29-Jul    | 30-Jul    | 31-Jul    |        |           |
|        |           |           | 24-hr TSP | Noise     |        |           |

\*Noise: Noise Monitoring works in both Kai Tak and Cha Kwo Ling (KTD1, KTD2d, KER1, CKL1 and CKL2)

\*\*24-hr TSP: 24-hr TSP Monitoring works in both Kai Tak and Cha Kwo Ling (KTD1, KTD2d, KER1, CKL1 and CKL2)

**Air Quality Monitoring Station**

*24-hr TSP*

KTD1 - Centre of Excellence in Paediatrics (Children's Hospital)  
KTD2d - Next to the SOR Office of Trunk Road T2 in Kai Tak Area  
KER1 - Future Residential Development at Kerry Godown  
CKL1 - Flat 121 Cha Kwo Ling Village  
CKL2 - Flat 103 Cha Kwo Ling Village

**Noise Monitoring Station**

KTD1 - Centre of Excellence in Paediatrics (Children's Hospital)  
KER1 - Future Residential Development at Kerry Godown  
KTD2d - Next to the SOR Office of Trunk Road T2 in Kai Tak Area  
CKL1 - Flat 121 Cha Kwo Ling Village  
CKL2 - Flat 103 Cha Kwo Ling Village

**Contract No. ED/2018/04**  
**Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron**  
**Tentative Impact Air and Noise Monitoring Schedule (August 2025)**

| Sunday | Monday    | Tuesday   | Wednesday | Thursday  | Friday | Saturday  |
|--------|-----------|-----------|-----------|-----------|--------|-----------|
|        |           |           |           |           | 1-Aug  | 2-Aug     |
|        |           |           |           |           |        |           |
| 3-Aug  | 4-Aug     | 5-Aug     | 6-Aug     | 7-Aug     | 8-Aug  | 9-Aug     |
|        |           | 24-hr TSP | Noise     |           |        |           |
| 10-Aug | 11-Aug    | 12-Aug    | 13-Aug    | 14-Aug    | 15-Aug | 16-Aug    |
|        | 24-hr TSP | Noise     |           |           |        | 24-hr TSP |
| 17-Aug | 18-Aug    | 19-Aug    | 20-Aug    | 21-Aug    | 22-Aug | 23-Aug    |
|        | Noise     |           |           | 24-hr TSP |        |           |
| 24-Aug | 25-Aug    | 26-Aug    | 27-Aug    | 28-Aug    | 29-Aug | 30-Aug    |
|        |           |           | 24-hr TSP | Noise     |        |           |
| 31-Aug |           |           |           |           |        |           |
|        |           |           |           |           |        |           |

The schedule may be changed due to unforeseen circumstances (adverse weather, safety concerns, etc.)

\*Noise: Noise Monitoring works in both Kai Tak and Cha Kwo Ling (KTD1, KTD2d, KER1, CKL1 and CKL2)

\*\*24-hr TSP: 24-hr TSP Monitoring works in both Kai Tak and Cha Kwo Ling (KTD1, KTD2d, KER1, CKL1 and CKL2)

**Air Quality Monitoring Station**

*24-hr TSP*

KTD1 - Centre of Excellence in Paediatrics (Children's Hospital)

KTD2d - Next to the SOR Office of Trunk Road T2 in Kai Tak Area

KER1 - Future Residential Development at Kerry Godown

CKL1 - Flat 121 Cha Kwo Ling Village

CKL2 - Flat 103 Cha Kwo Ling Village

**Noise Monitoring Station**

KTD1 - Centre of Excellence in Paediatrics (Children's Hospital)

KER1 - Future Residential Development at Kerry Godown

KTD2d - Next to the SOR Office of Trunk Road T2 in Kai Tak Area

CKL1 - Flat 121 Cha Kwo Ling Village

CKL2 - Flat 103 Cha Kwo Ling Village



**Contract No. ED/2018/04**  
**Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron**  
**Tentative Impact Air and Noise Monitoring Schedule (September 2025)**

| Sunday | Monday    | Tuesday   | Wednesday | Thursday  | Friday | Saturday  |
|--------|-----------|-----------|-----------|-----------|--------|-----------|
|        | 1-Sep     | 2-Sep     | 3-Sep     | 4-Sep     | 5-Sep  | 6-Sep     |
|        |           | 24-hr TSP | Noise     |           |        |           |
| 7-Sep  | 8-Sep     | 9-Sep     | 10-Sep    | 11-Sep    | 12-Sep | 13-Sep    |
|        | 24-hr TSP | Noise     |           |           |        | 24-hr TSP |
| 14-Sep | 15-Sep    | 16-Sep    | 17-Sep    | 18-Sep    | 19-Sep | 20-Sep    |
|        | Noise     |           |           | 24-hr TSP |        |           |
| 21-Sep | 22-Sep    | 23-Sep    | 24-Sep    | 25-Sep    | 26-Sep | 27-Sep    |
|        |           |           | 24-hr TSP | Noise     |        |           |
| 28-Sep | 29-Sep    | 30-Sep    |           |           |        |           |
|        | 24-hr TSP | Noise     |           |           |        |           |

The schedule may be changed due to unforeseen circumstances (adverse weather, safety concerns, etc.)

\*Noise: Noise Monitoring works in both Kai Tak and Cha Kwo Ling (KTD1, KTD2d, KER1, CKL1 and CKL2)

\*\*24-hr TSP: 24-hr TSP Monitoring works in both Kai Tak and Cha Kwo Ling (KTD1, KTD2d, KER1, CKL1 and CKL2)

**Air Quality Monitoring Station**

*24-hr TSP*

KTD1 - Centre of Excellence in Paediatrics (Children's Hospital)  
KTD2d - Next to the SOR Office of Trunk Road T2 in Kai Tak Area  
KER1 - Future Residential Development at Kerry Godown  
CKL1 - Flat 121 Cha Kwo Ling Village  
CKL2 - Flat 103 Cha Kwo Ling Village

**Noise Monitoring Station**

KTD1 - Centre of Excellence in Paediatrics (Children's Hospital)  
KER1 - Future Residential Development at Kerry Godown  
KTD2d - Next to the SOR Office of Trunk Road T2 in Kai Tak Area  
CKL1 - Flat 121 Cha Kwo Ling Village  
CKL2 - Flat 103 Cha Kwo Ling Village

**Contract No. ED/2018/04**  
**Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron**  
**Tentative Impact Air and Noise Monitoring Schedule (October 2025)**

| Sunday | Monday    | Tuesday   | Wednesday | Thursday  | Friday | Saturday  |
|--------|-----------|-----------|-----------|-----------|--------|-----------|
|        |           |           | 1-Oct     | 2-Oct     | 3-Oct  | 4-Oct     |
|        |           |           |           |           |        | 24-hr TSP |
| 5-Oct  | 6-Oct     | 7-Oct     | 8-Oct     | 9-Oct     | 10-Oct | 11-Oct    |
|        | Noise     |           |           | 24-hr TSP | Noise  |           |
| 12-Oct | 13-Oct    | 14-Oct    | 15-Oct    | 16-Oct    | 17-Oct | 18-Oct    |
|        |           |           | 24-hr TSP | Noise     |        |           |
| 19-Oct | 20-Oct    | 21-Oct    | 22-Oct    | 23-Oct    | 24-Oct | 25-Oct    |
|        |           | 24-hr TSP | Noise     |           |        |           |
| 26-Oct | 27-Oct    | 28-Oct    | 29-Oct    | 30-Oct    | 31-Oct |           |
|        | 24-hr TSP | Noise     |           |           |        |           |

The schedule may be changed due to unforeseen circumstances (adverse weather, safety concerns, etc.)

\*Noise: Noise Monitoring works in both Kai Tak and Cha Kwo Ling (KTD1, KTD2d, KER1, CKL1 and CKL2)

\*\*24-hr TSP: 24-hr TSP Monitoring works in both Kai Tak and Cha Kwo Ling (KTD1, KTD2d, KER1, CKL1 and CKL2)

**Air Quality Monitoring Station**

*24-hr TSP*

KTD1 - Centre of Excellence in Paediatrics (Children's Hospital)  
KTD2d - Next to the SOR Office of Trunk Road T2 in Kai Tak Area  
KER1 - Future Residential Development at Kerry Godown  
CKL1 - Flat 121 Cha Kwo Ling Village  
CKL2 - Flat 103 Cha Kwo Ling Village

**Noise Monitoring Station**

KTD1 - Centre of Excellence in Paediatrics (Children's Hospital)  
KER1 - Future Residential Development at Kerry Godown  
KTD2d - Next to the SOR Office of Trunk Road T2 in Kai Tak Area  
CKL1 - Flat 121 Cha Kwo Ling Village  
CKL2 - Flat 103 Cha Kwo Ling Village

---

---

**APPENDIX C  
COPIES OF CALIBRATION  
CERTIFICATES FOR AIR QUALITY  
MONITORING**

---

---

## Certificate of Calibration - Wind Monitoring Station

Description: Yau Lai Estate, Bik Lai House  
 Manufacturer: Davis Instruments  
 Model No.: Davis7440  
 Serial No.: MC01010A44  
 Equipment No.: SA-03-04  
 Date of Calibration: 17-Feb-2025  
 Next Due Date: 17-Aug-2025

### 1. Performance check of Wind Speed

| Wind Speed, m/s         |                       | Difference D (m/s) |
|-------------------------|-----------------------|--------------------|
| Wind Speed Reading (V1) | Anemometer Value (V2) | $D = V1 - V2$      |
| 0.0                     | 0.0                   | 0.0                |
| 1.5                     | 1.4                   | 0.1                |
| 2.5                     | 2.4                   | 0.1                |
| 4.0                     | 3.8                   | 0.2                |


### 2. Performance check of Wind Direction

| Wind Direction (°)          |                           | Difference D (°) |
|-----------------------------|---------------------------|------------------|
| Wind Direction Reading (W1) | Marine Compass Value (W2) | $D = W1 - W2$    |
| 0                           | 0                         | 0.0              |
| 90                          | 90                        | 0.0              |
| 180                         | 180                       | 0.0              |
| 270                         | 270                       | 0.0              |


### Test Specification:

1. Performance Wind Speed Test - The wind meter was on-site calibrated against the anemometer
2. Performance Wind Direction Test - The wind meter was on-site calibrated against the marine compass at four direction

Calibrated by:

  
 Wong Shing Kwai

Approved by:

  
 Henry Leung



# Certificate of Calibration

**Calibration Certification Information**

|                                      |                               |                        |
|--------------------------------------|-------------------------------|------------------------|
| <b>Cal. Date:</b> January 7, 2025    | <b>Rootsmeter S/N:</b> 438320 | <b>Ta:</b> 293 °K      |
| <b>Operator:</b> Jim Tisch           |                               | <b>Pa:</b> 759.0 mm Hg |
| <b>Calibration Model #:</b> TE-5025A | <b>Calibrator S/N:</b> 3864   |                        |

| Run | Vol. Init (m3) | Vol. Final (m3) | ΔVol. (m3) | ΔTime (min) | ΔP (mm Hg) | ΔH (in H2O) |
|-----|----------------|-----------------|------------|-------------|------------|-------------|
| 1   | 1              | 2               | 1          | 1.4590      | 3.2        | 2.00        |
| 2   | 3              | 4               | 1          | 1.0360      | 6.4        | 4.00        |
| 3   | 5              | 6               | 1          | 0.9160      | 8.0        | 5.00        |
| 4   | 7              | 8               | 1          | 0.8800      | 8.8        | 5.50        |
| 5   | 9              | 10              | 1          | 0.7270      | 12.7       | 8.00        |

**Data Tabulation**

| Vstd (m3)   | Qstd (x-axis) | $\sqrt{\Delta H \left( \frac{Pa}{Pstd} \right) \left( \frac{Tstd}{Ta} \right)}$ (y-axis) | Va        | Qa (x-axis) | $\sqrt{\Delta H \left( \frac{Ta}{Pa} \right)}$ (y-axis) |
|-------------|---------------|--|-----------|-------------|---|
| 1.0114      | 0.6932        | 1.4252   | 0.9958    | 0.6825      | 0.8787  |
| 1.0071      | 0.9721        | 2.0156   | 0.9916    | 0.9571      | 1.2427  |
| 1.0050      | 1.0971        | 2.2535   | 0.9895    | 1.0802      | 1.3893  |
| 1.0039      | 1.1408        | 2.3635   | 0.9884    | 1.1232      | 1.4572  |
| 0.9987      | 1.3737        | 2.8505   | 0.9833    | 1.3525      | 1.7574  |
| <b>QSTD</b> | <b>m=</b>     | <b>2.08969</b>   | <b>QA</b> | <b>m=</b>   | <b>1.30853</b>  |
|             | <b>b=</b>     | <b>-0.02374</b>  |           | <b>b=</b>   | <b>-0.01464</b>   |
|             | <b>r=</b>     | <b>0.99985</b>   |           | <b>r=</b>   | <b>0.99985</b>  |

**Calculations**

|  |   |
|--|---|
| <b>Vstd=</b> $\Delta Vol((Pa-\Delta P)/Pstd)(Tstd/Ta)$   | <b>Va=</b> $\Delta Vol((Pa-\Delta P)/Pa)$   |
| <b>Qstd=</b> $Vstd/\Delta Time$  | <b>Qa=</b> $Va/\Delta Time$   |
| <b>For subsequent flow rate calculations:</b>  |   |
| <b>Qstd=</b> $1/m \left( \left( \sqrt{\Delta H \left( \frac{Pa}{Pstd} \right) \left( \frac{Tstd}{Ta} \right)} \right) - b \right)$ | <b>Qa=</b> $1/m \left( \left( \sqrt{\Delta H \left( \frac{Ta}{Pa} \right)} \right) - b \right)$ |

**Standard Conditions**

Tstd: 298.15 °K  
Pstd: 760 mm Hg

**Key**

ΔH: calibrator manometer reading (in H2O)  
ΔP: rootsmeter manometer reading (mm Hg)  
Ta: actual absolute temperature (°K)  
Pa: actual barometric pressure (mm Hg)  
b: intercept  
m: slope

**RECALIBRATION**

US EPA recommends annual recalibration per 1998 40 Code of Federal Regulations Part 50 to 51, Appendix B to Part 50, Reference Method for the Determination of Suspended Particulate Matter in the Atmosphere, 9.2.17, page 30

# High-Volume TSP Sampler

## 5-POINT CALIBRATION DATA SHEET



File No. MA20003/18/032

Project No. CKL 1 - Flat 121 Cha Kwo Ling Village

Date: 6-May-25

Next Due Date: 6-Jul-25

Operator: SK

Equipment No.: A-01-18

Model No.: TE 5170

Serial No. 0723

### Ambient Condition

|                     |              |                     |              |
|---------------------|--------------|---------------------|--------------|
| Temperature, Ta (K) | <u>300.7</u> | Pressure, Pa (mmHg) | <u>759.1</u> |
|---------------------|--------------|---------------------|--------------|

### Orifice Transfer Standard Information

|                        |                 |  |                |               |                 |
|------------------------|-----------------|--|----------------|---------------|-----------------|
| Serial No.             | <u>3864</u>     | Slope, mc  | <u>0.05914</u> | Intercept, bc | <u>-0.02377</u> |
| Last Calibration Date: | <u>7-Jan-25</u> | $mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ |                |               |                 |
| Next Calibration Date: | <u>7-Jan-26</u> | $Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$  |                |               |                 |

### Calibration of TSP Sampler

| Calibration Point | Orifice                            |  |                        | HVS                            |   |
|-------------------|------------------------------------|--|------------------------|--------------------------------|---|
|                   | $\Delta H$ (orifice), in. of water | $[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ | Qstd (CFM)<br>X - axis | $\Delta W$ (HVS), in. of water | $[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Y-axis |
| 1                 | <u>13.3</u>                        | 3.63   | 61.75                  | <u>9.0</u>                     | 2.98  |
| 2                 | <u>10.5</u>                        | 3.22   | 54.91                  | <u>7.2</u>                     | 2.67  |
| 3                 | <u>8.4</u>                         | 2.88   | 49.16                  | <u>5.2</u>                     | 2.27  |
| 4                 | <u>6.0</u>                         | 2.44   | 41.61                  | <u>3.6</u>                     | 1.89  |
| 5                 | <u>3.0</u>                         | 1.72   | 29.54                  | <u>1.5</u>                     | 1.22  |

### By Linear Regression of Y on X

Slope, mw = 0.0554

Intercept, bw : -0.4205

Correlation coefficient\* = 0.9990

\*If Correlation Coefficient < 0.990, check and recalibrate.

### Set Point Calculation

From the TSP Field Calibration Curve, take Qstd = 43 CFM

From the Regression Equation, the "Y" value according to

$$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; W =  $(mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$  3.89

Remarks:

Conducted by: Wong Shing Kwai

Signature: 

Date: 6-May-25

Checked by: Henry Leung

Signature: 

Date: 6-May-25

# High-Volume TSP Sampler

## 5-POINT CALIBRATION DATA SHEET



File No. MA20003/18/033

Project No. CKL 1 - Flat 121 Cha Kwo Ling Village

Date: 4-Jul-25 Next Due Date: 4-Sep-25 Operator: SK

Equipment No.: A-01-18 Model No.: TE 5170 Serial No. 0723

| Ambient Condition   |              |                     |              |
|---------------------|--------------|---------------------|--------------|
| Temperature, Ta (K) | <u>303.8</u> | Pressure, Pa (mmHg) | <u>754.1</u> |

| Orifice Transfer Standard Information |                 |  |                |               |                 |
|---------------------------------------|-----------------|--|----------------|---------------|-----------------|
| Serial No.                            | <u>3864</u>     | Slope, mc  | <u>0.05914</u> | Intercept, bc | <u>-0.02377</u> |
| Last Calibration Date:                | <u>7-Jan-25</u> | $mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ |                |               |                 |
| Next Calibration Date:                | <u>7-Jan-26</u> | $Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$  |                |               |                 |

| Calibration of TSP Sampler |                                    |  |                        |                                |   |
|----------------------------|------------------------------------|--|------------------------|--------------------------------|---|
| Calibration Point          | Orifice                            |  |                        | HVS                            |   |
|                            | $\Delta H$ (orifice), in. of water | $[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ | Qstd (CFM)<br>X - axis | $\Delta W$ (HVS), in. of water | $[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Y-axis |
| 1                          | <u>13.2</u>                        | <u>3.58</u>  | <u>61.01</u>           | <u>8.8</u>                     | <u>2.93</u>   |
| 2                          | <u>10.4</u>                        | <u>3.18</u>  | <u>54.20</u>           | <u>7.3</u>                     | <u>2.67</u>   |
| 3                          | <u>8.3</u>                         | <u>2.84</u>  | <u>48.46</u>           | <u>5.1</u>                     | <u>2.23</u>   |
| 4                          | <u>6.2</u>                         | <u>2.46</u>  | <u>41.94</u>           | <u>3.4</u>                     | <u>1.82</u>   |
| 5                          | <u>3.3</u>                         | <u>1.79</u>  | <u>30.71</u>           | <u>1.4</u>                     | <u>1.17</u>   |

### By Linear Regression of Y on X

Slope, mw = 0.0598 Intercept, bw = -0.6672

Correlation coefficient\* = 0.9970

\*If Correlation Coefficient < 0.990, check and recalibrate.

### Set Point Calculation


From the TSP Field Calibration Curve, take Qstd = 43 CFM


From the Regression Equation, the "Y" value according to

$$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; W =  $(mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$  3.73

Remarks: \_\_\_\_\_

Conducted by: Wong Shing Kwai Signature:  Date: 4-Jul-25

Checked by: Henry Leung Signature:  Date: 4-Jul-25

# High-Volume TSP Sampler

## 5-POINT CALIBRATION DATA SHEET



File No. MA20003/55/032

Project No. CKL 2 - Flat 103 Cha Kwo Ling Village

Date: 6-May-25 Next Due Date: 6-Jul-25 Operator: SK

Equipment No.: A-01-55 Model No.: TE 5170 Serial No. 1956

| Ambient Condition   |              |                     |              |
|---------------------|--------------|---------------------|--------------|
| Temperature, Ta (K) | <u>300.7</u> | Pressure, Pa (mmHg) | <u>759.1</u> |

| Orifice Transfer Standard Information |                 |  |                |               |                 |
|---------------------------------------|-----------------|--|----------------|---------------|-----------------|
| Serial No.                            | <u>3864</u>     | Slope, mc  | <u>0.05914</u> | Intercept, bc | <u>-0.02377</u> |
| Last Calibration Date:                | <u>7-Jan-25</u> | $mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ |                |               |                 |
| Next Calibration Date:                | <u>7-Jan-26</u> | $Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$  |                |               |                 |

| Calibration of TSP Sampler |                                    |  |                        |                                |  |
|----------------------------|------------------------------------|--|------------------------|--------------------------------|--|
| Calibration Point          | Orifice                            |  |                        | HVS                            |  |
|                            | $\Delta H$ (orifice), in. of water | $[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ | Qstd (CFM)<br>X - axis | $\Delta W$ (HVS), in. of water | $[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$<br>Y-axis |
| 1                          | <u>13.6</u>                        | <u>3.67</u>  | <u>62.44</u>           | <u>9.0</u>                     | <u>2.98</u>  |
| 2                          | <u>11.1</u>                        | <u>3.31</u>  | <u>56.45</u>           | <u>7.0</u>                     | <u>2.63</u>  |
| 3                          | <u>9.2</u>                         | <u>3.02</u>  | <u>51.43</u>           | <u>5.8</u>                     | <u>2.40</u>  |
| 4                          | <u>5.2</u>                         | <u>2.27</u>  | <u>38.76</u>           | <u>2.8</u>                     | <u>1.66</u>  |
| 5                          | <u>3.8</u>                         | <u>1.94</u>  | <u>33.20</u>           | <u>2.0</u>                     | <u>1.41</u>  |

### By Linear Regression of Y on X

Slope, mw = 0.0543 Intercept, bw : -0.4130

Correlation coefficient\* = 0.9995

\*If Correlation Coefficient < 0.990, check and recalibrate.

| Set Point Calculation   |  |
|---|--|
| From the TSP Field Calibration Curve, take Qstd = 43 CFM  |  |
| From the Regression Equation, the "Y" value according to  |  |
| $mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$                              |  |
| Therefore, Set Point; $W = (mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$ <u>3.73</u> |  |

Remarks: \_\_\_\_\_

Conducted by: Wong Shing Kwai Signature: [Signature] Date: 6-May-25

Checked by: Henry Leung Signature: [Signature] Date: 6-May-25



# High-Volume TSP Sampler

## 5-POINT CALIBRATION DATA SHEET



File No. MA20003/55/033

Project No. CKL 2 - Flat 103 Cha Kwo Ling Village

Date: 4-Jul-25 Next Due Date: 4-Sep-25 Operator: SK

Equipment No.: A-01-55 Model No.: TE 5170 Serial No. 1956

| Ambient Condition   |              |                     |              |
|---------------------|--------------|---------------------|--------------|
| Temperature, Ta (K) | <b>303.8</b> | Pressure, Pa (mmHg) | <b>754.1</b> |

| Orifice Transfer Standard Information |          |  |         |               |          |
|---------------------------------------|----------|--|---------|---------------|----------|
| Serial No.                            | 3864     | Slope, mc  | 0.05914 | Intercept, bc | -0.02377 |
| Last Calibration Date:                | 7-Jan-25 | $mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ |         |               |          |
| Next Calibration Date:                | 7-Jan-26 | $Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$  |         |               |          |

| Calibration of TSP Sampler |                                    |  |                        |                                |  |
|----------------------------|------------------------------------|--|------------------------|--------------------------------|--|
| Calibration Point          | Orifice                            |  |                        | HVS                            |  |
|                            | $\Delta H$ (orifice), in. of water | $[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ | Qstd (CFM)<br>X - axis | $\Delta W$ (HVS), in. of water | $[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$<br>Y-axis |
| 1                          | <b>13.4</b>                        | 3.61   | 61.47                  | <b>9.1</b>                     | 2.98   |
| 2                          | <b>11.2</b>                        | 3.30   | 56.23                  | <b>7.2</b>                     | 2.65   |
| 3                          | <b>9.3</b>                         | 3.01   | 51.27                  | <b>5.5</b>                     | 2.31   |
| 4                          | <b>5.1</b>                         | 2.23   | 38.07                  | <b>2.6</b>                     | 1.59   |
| 5                          | <b>3.7</b>                         | 1.90   | 32.49                  | <b>2.0</b>                     | 1.40   |

### By Linear Regression of Y on X

Slope, mw = 0.0551 Intercept, bw = -0.4575

Correlation coefficient\* = 0.9969

\*If Correlation Coefficient < 0.990, check and recalibrate.

| Set Point Calculation   |  |
|---|--|
| From the TSP Field Calibration Curve, take Qstd = 43 CFM  |  |
| From the Regression Equation, the "Y" value according to  |  |
| $mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$                              |  |
| Therefore, Set Point; $W = (mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$ <u>3.76</u> |  |

Remarks: \_\_\_\_\_

Conducted by: Wong Shing Kwai Signature: [Signature] Date: 4-Jul-25

Checked by: Henry Leung Signature: [Signature] Date: 4-Jul-25

# High-Volume TSP Sampler

## 5-POINT CALIBRATION DATA SHEET



File No. MA20003/04/0030

Project No. KER 1 - Future Residential Development at Kerry Godown

Date: 14-May-25 Next Due Date: 14-Jul-25 Operator: SK

Equipment No.: A-01-04 Model No.: TE 5170 Serial No. 10595

| Ambient Condition   |              |                     |              |
|---------------------|--------------|---------------------|--------------|
| Temperature, Ta (K) | <u>300.2</u> | Pressure, Pa (mmHg) | <u>759.6</u> |

| Orifice Transfer Standard Information |                 |  |                |               |                 |
|---------------------------------------|-----------------|--|----------------|---------------|-----------------|
| Serial No.                            | <u>3864</u>     | Slope, mc  | <u>0.05914</u> | Intercept, bc | <u>-0.02377</u> |
| Last Calibration Date:                | <u>7-Jan-25</u> | $mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ |                |               |                 |
| Next Calibration Date:                | <u>7-Jan-26</u> | $Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$  |                |               |                 |

| Calibration of TSP Sampler |                                    |  |                        |                                |  |
|----------------------------|------------------------------------|--|------------------------|--------------------------------|--|
| Calibration Point          | Orifice                            |  |                        | HVS                            |  |
|                            | $\Delta H$ (orifice), in. of water | $[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ | Qstd (CFM)<br>X - axis | $\Delta W$ (HVS), in. of water | $[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$<br>Y-axis |
| 1                          | <u>12.8</u>                        | 3.56   | 60.66                  | <u>8.2</u>                     | 2.85   |
| 2                          | <u>10.6</u>                        | 3.24   | 55.24                  | <u>7.0</u>                     | 2.64   |
| 3                          | <u>8.6</u>                         | 2.92   | 49.79                  | <u>5.1</u>                     | 2.25   |
| 4                          | <u>5.0</u>                         | 2.23   | 38.06                  | <u>2.9</u>                     | 1.70   |
| 5                          | <u>3.8</u>                         | 1.94   | 33.23                  | <u>2.0</u>                     | 1.41   |

By Linear Regression of Y on X

Slope, mw = 0.0529 Intercept, bw : -0.3400

Correlation coefficient\* = 0.9981

\*If Correlation Coefficient < 0.990, check and recalibrate.

### Set Point Calculation

From the TSP Field Calibration Curve, take Qstd = 43 CFM

From the Regression Equation, the "Y" value according to

$$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; W =  $(mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$  3.78

Remarks: \_\_\_\_\_

Conducted by: Wong Shing Kwai Signature: [Signature] Date: 14-May-25

Checked by: Henry Leung Signature: [Signature] Date: 14-May-25

# High-Volume TSP Sampler

## 5-POINT CALIBRATION DATA SHEET



File No. MA20003/04/0031

Project No. KER 1 - Future Residential Development at Kerry Godown  
 Date: 11-Jul-25 Next Due Date: 11-Sep-25 Operator: SK  
 Equipment No.: A-01-04 Model No.: TE 5170 Serial No. 10595

| Ambient Condition   |              |                     |              |
|---------------------|--------------|---------------------|--------------|
| Temperature, Ta (K) | <u>300.9</u> | Pressure, Pa (mmHg) | <u>749.2</u> |

| Orifice Transfer Standard Information |                 |  |                |               |                 |
|---------------------------------------|-----------------|--|----------------|---------------|-----------------|
| Serial No.                            | <u>3864</u>     | Slope, mc  | <u>0.05914</u> | Intercept, bc | <u>-0.02377</u> |
| Last Calibration Date:                | <u>7-Jan-25</u> | $mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ |                |               |                 |
| Next Calibration Date:                | <u>7-Jan-26</u> | $Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$  |                |               |                 |

| Calibration of TSP Sampler |                                    |  |                        |                                |  |
|----------------------------|------------------------------------|--|------------------------|--------------------------------|--|
| Calibration Point          | Orifice                            |  |                        | HVS                            |  |
|                            | $\Delta H$ (orifice), in. of water | $[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ | Qstd (CFM)<br>X - axis | $\Delta W$ (HVS), in. of water | $[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$<br>Y-axis |
| 1                          | <u>12.6</u>                        | 3.51   | 59.71                  | <u>8.3</u>                     | 2.85   |
| 2                          | <u>10.5</u>                        | 3.20   | 54.54                  | <u>7.1</u>                     | 2.63   |
| 3                          | <u>8.5</u>                         | 2.88   | 49.11                  | <u>5.2</u>                     | 2.25   |
| 4                          | <u>5.3</u>                         | 2.27   | 38.87                  | <u>2.8</u>                     | 1.65   |
| 5                          | <u>3.6</u>                         | 1.87   | 32.10                  | <u>2.1</u>                     | 1.43   |

By Linear Regression of Y on X

Slope, mw = 0.0538 Intercept, bw = -0.3556

Correlation coefficient\* = 0.9951

\*If Correlation Coefficient < 0.990, check and recalibrate.

### Set Point Calculation

From the TSP Field Calibration Curve, take Qstd = 43 CFM

From the Regression Equation, the "Y" value according to

$$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; W =  $(mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$  3.92

Remarks: \_\_\_\_\_  
 \_\_\_\_\_

Conducted by: Wong Shing Kwai Signature: [Signature] Date: 11-Jul-25

Checked by: Henry Leung Signature: [Signature] Date: 11-Jul-25

# High-Volume TSP Sampler

## 5-POINT CALIBRATION DATA SHEET



File No. MA20003/44/0029

Project No. KTD1 - Centre of Excellence in Paediatrics (Children's Hospital)  
 Date: 14-May-25 Next Due Date: 14-Jul-25 Operator: SK  
 Equipment No.: A-01-44 Model No.: TE-5170 Serial No. 1316

| Ambient Condition   |              |                     |              |
|---------------------|--------------|---------------------|--------------|
| Temperature, Ta (K) | <u>300.2</u> | Pressure, Pa (mmHg) | <u>759.6</u> |

| Orifice Transfer Standard Information |                 |  |                |               |                 |
|---------------------------------------|-----------------|--|----------------|---------------|-----------------|
| Serial No.                            | <u>3864</u>     | Slope, mc  | <u>0.05914</u> | Intercept, bc | <u>-0.02377</u> |
| Last Calibration Date:                | <u>7-Jan-25</u> | $mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ |                |               |                 |
| Next Calibration Date:                | <u>7-Jan-26</u> | $Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$  |                |               |                 |

| Calibration of TSP Sampler |                                    |  |                        |                                |  |
|----------------------------|------------------------------------|--|------------------------|--------------------------------|--|
| Calibration Point          | Orifice                            |  |                        | HVS                            |  |
|                            | $\Delta H$ (orifice), in. of water | $[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ | Qstd (CFM)<br>X - axis | $\Delta W$ (HVS), in. of water | $[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$<br>Y-axis |
| 1                          | <u>13.6</u>                        | <u>3.67</u>  | <u>62.51</u>           | <u>9.0</u>                     | <u>2.99</u>  |
| 2                          | <u>11.5</u>                        | <u>3.38</u>  | <u>57.52</u>           | <u>7.4</u>                     | <u>2.71</u>  |
| 3                          | <u>9.4</u>                         | <u>3.05</u>  | <u>52.04</u>           | <u>5.6</u>                     | <u>2.36</u>  |
| 4                          | <u>6.0</u>                         | <u>2.44</u>  | <u>41.66</u>           | <u>3.5</u>                     | <u>1.86</u>  |
| 5                          | <u>3.7</u>                         | <u>1.92</u>  | <u>32.80</u>           | <u>2.0</u>                     | <u>1.41</u>  |

By Linear Regression of Y on X

Slope, mw = 0.0528 Intercept, bw : -0.3396

Correlation coefficient\* = 0.9988

\*If Correlation Coefficient < 0.990, check and recalibrate.

### Set Point Calculation

From the TSP Field Calibration Curve, take Qstd = 43 CFM

From the Regression Equation, the "Y" value according to

$$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; W =  $(mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$  3.76

Remarks: \_\_\_\_\_

Conducted by: Wong Shing Kwai Signature: [Signature] Date: 14-May-25

Checked by: Henry Leung Signature: [Signature] Date: 14-May-25

# High-Volume TSP Sampler

## 5-POINT CALIBRATION DATA SHEET



File No. MA20003/44/0030

Project No. KTD1 - Centre of Excellence in Paediatrics (Children's Hospital)  
 Date: 11-Jul-25 Next Due Date: 11-Sep-25 Operator: SK  
 Equipment No.: A-01-44 Model No.: TE-5170 Serial No. 1316

| Ambient Condition   |              |                     |              |
|---------------------|--------------|---------------------|--------------|
| Temperature, Ta (K) | <u>300.9</u> | Pressure, Pa (mmHg) | <u>749.2</u> |

| Orifice Transfer Standard Information |                 |  |                |               |                 |
|---------------------------------------|-----------------|--|----------------|---------------|-----------------|
| Serial No.                            | <u>3864</u>     | Slope, mc  | <u>0.05914</u> | Intercept, bc | <u>-0.02377</u> |
| Last Calibration Date:                | <u>7-Jan-25</u> | $mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ |                |               |                 |
| Next Calibration Date:                | <u>7-Jan-26</u> | $Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$  |                |               |                 |

| Calibration of TSP Sampler |                                    |  |                        |                                |  |
|----------------------------|------------------------------------|--|------------------------|--------------------------------|--|
| Calibration Point          | Orifice                            |  |                        | HVS                            |  |
|                            | $\Delta H$ (orifice), in. of water | $[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ | Qstd (CFM)<br>X - axis | $\Delta W$ (HVS), in. of water | $[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$<br>Y-axis |
| 1                          | <u>13.4</u>                        | 3.62   | 61.56                  | <u>9.1</u>                     | 2.98   |
| 2                          | <u>11.4</u>                        | 3.34   | 56.81                  | <u>7.3</u>                     | 2.67   |
| 3                          | <u>9.5</u>                         | 3.05   | 51.90                  | <u>5.6</u>                     | 2.34   |
| 4                          | <u>6.2</u>                         | 2.46   | 42.00                  | <u>3.7</u>                     | 1.90   |
| 5                          | <u>3.6</u>                         | 1.87   | 32.10                  | <u>2.1</u>                     | 1.43   |

By Linear Regression of Y on X

Slope, mw = 0.0516 Intercept, bw = -0.2586

Correlation coefficient\* = 0.9961

\*If Correlation Coefficient < 0.990, check and recalibrate.

### Set Point Calculation

From the TSP Field Calibration Curve, take Qstd = 43 CFM

From the Regression Equation, the "Y" value according to

$$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; W =  $(mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$  3.94

Remarks: \_\_\_\_\_  
 \_\_\_\_\_

Conducted by: Wong Shing Kwai Signature: [Signature] Date: 11-Jul-25

Checked by: Henry Leung Signature: [Signature] Date: 11-Jul-25

# High-Volume TSP Sampler

## 5-POINT CALIBRATION DATA SHEET



File No. MA20003/41/0029

Project No. KTD 2D - Next to the SOR Office of Trunk Road T2 in Kai Tak Area

Date: 14-May-25 Next Due Date: 14-Jul-25 Operator: SK

Equipment No.: A-01-41 Model No.: TE 5170 Serial No. 5280

| Ambient Condition   |              |                     |              |
|---------------------|--------------|---------------------|--------------|
| Temperature, Ta (K) | <u>300.2</u> | Pressure, Pa (mmHg) | <u>759.6</u> |

| Orifice Transfer Standard Information |                 |  |                |               |                 |
|---------------------------------------|-----------------|--|----------------|---------------|-----------------|
| Serial No.                            | <u>3864</u>     | Slope, mc  | <u>0.05914</u> | Intercept, bc | <u>-0.02377</u> |
| Last Calibration Date:                | <u>7-Jan-25</u> | $mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ |                |               |                 |
| Next Calibration Date:                | <u>7-Jan-26</u> | $Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$  |                |               |                 |

| Calibration of TSP Sampler |                                    |  |                        |                                |  |
|----------------------------|------------------------------------|--|------------------------|--------------------------------|--|
| Calibration Point          | Orifice                            |  |                        | HVS                            |  |
|                            | $\Delta H$ (orifice), in. of water | $[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ | Qstd (CFM)<br>X - axis | $\Delta W$ (HVS), in. of water | $[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$<br>Y-axis |
| 1                          | <u>13.7</u>                        | <u>3.69</u>  | <u>62.74</u>           | <u>9.3</u>                     | <u>3.04</u>  |
| 2                          | <u>11.5</u>                        | <u>3.38</u>  | <u>57.52</u>           | <u>8.0</u>                     | <u>2.82</u>  |
| 3                          | <u>9.5</u>                         | <u>3.07</u>  | <u>52.31</u>           | <u>6.2</u>                     | <u>2.48</u>  |
| 4                          | <u>7.0</u>                         | <u>2.64</u>  | <u>44.96</u>           | <u>4.3</u>                     | <u>2.07</u>  |
| 5                          | <u>4.0</u>                         | <u>1.99</u>  | <u>34.09</u>           | <u>2.0</u>                     | <u>1.41</u>  |

### By Linear Regression of Y on X

Slope, mw = 0.0577 Intercept, bw : -0.5406

Correlation coefficient\* = 0.9989

\*If Correlation Coefficient < 0.990, check and recalibrate.

| Set Point Calculation   |  |
|---|--|
| From the TSP Field Calibration Curve, take Qstd = 43 CFM  |  |
| From the Regression Equation, the "Y" value according to  |  |
| $mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$                              |  |
| Therefore, Set Point; $W = (mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$ <u>3.79</u> |  |

Remarks: \_\_\_\_\_

Conducted by: Wong Shing Kwai Signature: [Signature] Date: 14-May-25

Checked by: Henry Leung Signature: [Signature] Date: 14-May-25

# High-Volume TSP Sampler

## 5-POINT CALIBRATION DATA SHEET



File No. MA20003/41/0030

Project No. KTD 2D - Next to the SOR Office of Trunk Road T2 in Kai Tak Area

Date: 11-Jul-25 Next Due Date: 11-Sep-25 Operator: SK

Equipment No.: A-01-41 Model No.: TE 5170 Serial No. 5280

| Ambient Condition   |              |                     |              |
|---------------------|--------------|---------------------|--------------|
| Temperature, Ta (K) | <u>300.9</u> | Pressure, Pa (mmHg) | <u>749.2</u> |

| Orifice Transfer Standard Information |                 |  |                |               |                 |
|---------------------------------------|-----------------|--|----------------|---------------|-----------------|
| Serial No.                            | <u>3864</u>     | Slope, mc  | <u>0.05914</u> | Intercept, bc | <u>-0.02377</u> |
| Last Calibration Date:                | <u>7-Jan-25</u> | $mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ |                |               |                 |
| Next Calibration Date:                | <u>7-Jan-26</u> | $Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$  |                |               |                 |

| Calibration of TSP Sampler |                                    |  |                        |                                |  |
|----------------------------|------------------------------------|--|------------------------|--------------------------------|--|
| Calibration Point          | Orifice                            |  |                        | HVS                            |  |
|                            | $\Delta H$ (orifice), in. of water | $[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ | Qstd (CFM)<br>X - axis | $\Delta W$ (HVS), in. of water | $[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$<br>Y-axis |
| 1                          | <u>13.6</u>                        | <u>3.64</u>  | <u>62.02</u>           | <u>9.4</u>                     | <u>3.03</u>  |
| 2                          | <u>11.4</u>                        | <u>3.34</u>  | <u>56.81</u>           | <u>8.2</u>                     | <u>2.83</u>  |
| 3                          | <u>9.6</u>                         | <u>3.06</u>  | <u>52.17</u>           | <u>6.1</u>                     | <u>2.44</u>  |
| 4                          | <u>7.2</u>                         | <u>2.65</u>  | <u>45.23</u>           | <u>4.2</u>                     | <u>2.02</u>  |
| 5                          | <u>4.2</u>                         | <u>2.02</u>  | <u>34.64</u>           | <u>2.3</u>                     | <u>1.50</u>  |

### By Linear Regression of Y on X

Slope, mw = 0.0578 Intercept, bw = -0.5358

Correlation coefficient\* = 0.9959

\*If Correlation Coefficient < 0.990, check and recalibrate.

| Set Point Calculation   |  |
|---|--|
| From the TSP Field Calibration Curve, take Qstd = 43 CFM  |  |
| From the Regression Equation, the "Y" value according to  |  |
| $mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$                              |  |
| Therefore, Set Point; $W = (mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$ <u>3.89</u> |  |

Remarks: \_\_\_\_\_

Conducted by: Wong Shing Kwai Signature: [Signature] Date: 11-Jul-25

Checked by: Henry Leung Signature: [Signature] Date: 11-Jul-25

---

---

**APPENDIX D**  
**WEATHER INFORMATION**

---

---



**Appendix D - Weather Conditions During Impact Monitoring Period**

| Date      | Mean Air Temperature (°C) <sup>1</sup> | Mean Relative Humidity (%) <sup>2</sup> | Precipitation (mm) <sup>3</sup> |
|-----------|--|---|---------------------------------|
| 1-Jul-25  | 28.2                                   | 87                                      | 5.5                             |
| 2-Jul-25  | 30.0                                   | 80                                      | 0.5                             |
| 3-Jul-25  | 30.3                                   | 76                                      | 0.0                             |
| 4-Jul-25  | 30.8                                   | 71                                      | 0.0                             |
| 5-Jul-25  | 30.6                                   | 71                                      | 3.7                             |
| 6-Jul-25  | 30.3                                   | 71                                      | 0.0                             |
| 7-Jul-25  | 31.2                                   | 77                                      | 0.0                             |
| 8-Jul-25  | 30.9                                   | 76                                      | 0.0                             |
| 9-Jul-25  | 30.7                                   | 77                                      | 15.2                            |
| 10-Jul-25 | 26.3                                   | 93                                      | 126.4                           |
| 11-Jul-25 | 27.9                                   | 84                                      | 0.0                             |
| 12-Jul-25 | 28.7                                   | 87                                      | 38.4                            |
| 13-Jul-25 | 30.1                                   | 81                                      | 1.9                             |
| 14-Jul-25 | 30.2                                   | 79                                      | 9.2                             |
| 15-Jul-25 | 30.3                                   | 79                                      | 3.2                             |
| 16-Jul-25 | 31.1                                   | 75                                      | 0.0                             |
| 17-Jul-25 | 31.3                                   | 76                                      | 0.0                             |
| 18-Jul-25 | 28.6                                   | 85                                      | 19.0                            |
| 19-Jul-25 | 29.5                                   | 78                                      | 10.0                            |
| 20-Jul-25 | 27.0                                   | 91                                      | 87.6                            |
| 21-Jul-25 | 27.1                                   | 92                                      | 42.4                            |
| 22-Jul-25 | 28.0                                   | 88                                      | 95.7                            |
| 23-Jul-25 | 29.0                                   | 81                                      | 2.6                             |
| 24-Jul-25 | 29.4                                   | 77                                      | Trace                           |
| 25-Jul-25 | 29.2                                   | 78                                      | 31.8                            |
| 26-Jul-25 | 30.2                                   | 74                                      | 0.0                             |
| 27-Jul-25 | 30.4                                   | 76                                      | 0.0                             |
| 28-Jul-25 | 30.1                                   | 80                                      | 0.6                             |
| 29-Jul-25 | 27.8                                   | 90                                      | 106.5                           |
| 30-Jul-25 | 29.8                                   | 84                                      | 0.0                             |
| 31-Jul-25 | 29.9                                   | 83                                      | 1.5                             |

**(Reporting Month: July 2025)****Remarks:**

Source - Hong Kong Observatory

<sup>1-3</sup>Retrieved from Manned Weather Station (Hong Kong Observatory) (22°18'07" N, 114°10'27" E)

| July 2025                 |          |           |                |
|---------------------------|----------|-----------|----------------|
| Wind Speed and Directions |          |           |                |
| Date                      | Time     | Direction | Wind Speed m-s |
| 1 Jul 2025                | 12:00 AM | S         | 0.1            |
| 1 Jul 2025                | 1:00 AM  | SW        | 0.2            |
| 1 Jul 2025                | 2:00 AM  | NNW       | 0.1            |
| 1 Jul 2025                | 3:00 AM  | W         | 0.0            |
| 1 Jul 2025                | 4:00 AM  | S         | 0.0            |
| 1 Jul 2025                | 5:00 AM  | WSW       | 0.2            |
| 1 Jul 2025                | 6:00 AM  | SSW       | 0.2            |
| 1 Jul 2025                | 7:00 AM  | SW        | 0.3            |
| 1 Jul 2025                | 8:00 AM  | SSW       | 0.3            |
| 1 Jul 2025                | 9:00 AM  | SW        | 0.5            |
| 1 Jul 2025                | 10:00 AM | W         | 0.4            |
| 1 Jul 2025                | 11:00 AM | W         | 0.4            |
| 1 Jul 2025                | 12:00 PM | WSW       | 0.3            |
| 1 Jul 2025                | 1:00 PM  | SW        | 0.3            |
| 1 Jul 2025                | 2:00 PM  | WSW       | 0.2            |
| 1 Jul 2025                | 3:00 PM  | WSW       | 0.2            |
| 1 Jul 2025                | 4:00 PM  | W         | 0.1            |
| 1 Jul 2025                | 5:00 PM  | SW        | 0.0            |
| 1 Jul 2025                | 6:00 PM  | S         | 0.2            |
| 1 Jul 2025                | 7:00 PM  | SSW       | 0.1            |
| 1 Jul 2025                | 8:00 PM  | SSW       | 0.3            |
| 1 Jul 2025                | 9:00 PM  | SW        | 0.2            |
| 1 Jul 2025                | 10:00 PM | SW        | 0.1            |
| 1 Jul 2025                | 11:00 PM | WSW       | 0.2            |
| 2 Jul 2025                | 12:00 AM | W         | 0.1            |
| 2 Jul 2025                | 1:00 AM  | NW        | 0.0            |
| 2 Jul 2025                | 2:00 AM  | W         | 0.2            |
| 2 Jul 2025                | 3:00 AM  | NW        | 0.0            |
| 2 Jul 2025                | 4:00 AM  | WNW       | 0.1            |
| 2 Jul 2025                | 5:00 AM  | WSW       | 0.1            |
| 2 Jul 2025                | 6:00 AM  | SW        | 0.0            |
| 2 Jul 2025                | 7:00 AM  | SW        | 0.1            |
| 2 Jul 2025                | 8:00 AM  | SSW       | 0.4            |
| 2 Jul 2025                | 9:00 AM  | SSW       | 0.5            |
| 2 Jul 2025                | 10:00 AM | WSW       | 0.9            |
| 2 Jul 2025                | 11:00 AM | SSW       | 1.0            |
| 2 Jul 2025                | 12:00 PM | SW        | 1.0            |
| 2 Jul 2025                | 1:00 PM  | SSW       | 0.8            |
| 2 Jul 2025                | 2:00 PM  | WSW       | 1.0            |
| 2 Jul 2025                | 3:00 PM  | SW        | 0.8            |
| 2 Jul 2025                | 4:00 PM  | SW        | 0.7            |
| 2 Jul 2025                | 5:00 PM  | WSW       | 0.7            |
| 2 Jul 2025                | 6:00 PM  | WSW       | 0.3            |
| 2 Jul 2025                | 7:00 PM  | SW        | 0.2            |
| 2 Jul 2025                | 8:00 PM  | WSW       | 0.3            |
| 2 Jul 2025                | 9:00 PM  | W         | 0.1            |
| 2 Jul 2025                | 10:00 PM | WSW       | 0.2            |
| 2 Jul 2025                | 11:00 PM | SW        | 0.1            |
| 3 Jul 2025                | 12:00 AM | W         | 0.3            |
| 3 Jul 2025                | 1:00 AM  | SSW       | 0.1            |
| 3 Jul 2025                | 2:00 AM  | NE        | 0.0            |
| 3 Jul 2025                | 3:00 AM  | NNE       | 0.1            |
| 3 Jul 2025                | 4:00 AM  | SSE       | 0.1            |
| 3 Jul 2025                | 5:00 AM  | SW        | 0.2            |
| 3 Jul 2025                | 6:00 AM  | WSW       | 0.1            |
| 3 Jul 2025                | 7:00 AM  | SW        | 0.2            |
| 3 Jul 2025                | 8:00 AM  | WSW       | 0.3            |

| July 2025                 |          |           |                |
|---------------------------|----------|-----------|----------------|
| Wind Speed and Directions |          |           |                |
| Date                      | Time     | Direction | Wind Speed m-s |
| 3 Jul 2025                | 9:00 AM  | SW        | 0.3            |
| 3 Jul 2025                | 10:00 AM | SW        | 0.5            |
| 3 Jul 2025                | 11:00 AM | SW        | 0.7            |
| 3 Jul 2025                | 12:00 PM | SW        | 0.7            |
| 3 Jul 2025                | 1:00 PM  | SW        | 0.8            |
| 3 Jul 2025                | 2:00 PM  | WSW       | 0.9            |
| 3 Jul 2025                | 3:00 PM  | SW        | 0.5            |
| 3 Jul 2025                | 4:00 PM  | SSW       | 0.5            |
| 3 Jul 2025                | 5:00 PM  | SW        | 0.7            |
| 3 Jul 2025                | 6:00 PM  | WSW       | 0.5            |
| 3 Jul 2025                | 7:00 PM  | SW        | 0.3            |
| 3 Jul 2025                | 8:00 PM  | WSW       | 0.4            |
| 3 Jul 2025                | 9:00 PM  | W         | 0.3            |
| 3 Jul 2025                | 10:00 PM | WSW       | 0.2            |
| 3 Jul 2025                | 11:00 PM | WNW       | 0.2            |
| 4 Jul 2025                | 12:00 AM | WNW       | 0.2            |
| 4 Jul 2025                | 1:00 AM  | WNW       | 0.2            |
| 4 Jul 2025                | 2:00 AM  | WSW       | 0.1            |
| 4 Jul 2025                | 3:00 AM  | W         | 0.1            |
| 4 Jul 2025                | 4:00 AM  | SW        | 0.0            |
| 4 Jul 2025                | 5:00 AM  | WSW       | 0.0            |
| 4 Jul 2025                | 6:00 AM  | WNW       | 0.1            |
| 4 Jul 2025                | 7:00 AM  | NW        | 0.1            |
| 4 Jul 2025                | 8:00 AM  | WSW       | 0.3            |
| 4 Jul 2025                | 9:00 AM  | SW        | 0.4            |
| 4 Jul 2025                | 10:00 AM | SW        | 0.8            |
| 4 Jul 2025                | 11:00 AM | SW        | 0.9            |
| 4 Jul 2025                | 12:00 PM | SSW       | 0.8            |
| 4 Jul 2025                | 1:00 PM  | SW        | 0.8            |
| 4 Jul 2025                | 2:00 PM  | W         | 0.8            |
| 4 Jul 2025                | 3:00 PM  | WSW       | 0.6            |
| 4 Jul 2025                | 4:00 PM  | SW        | 0.4            |
| 4 Jul 2025                | 5:00 PM  | SW        | 0.5            |
| 4 Jul 2025                | 6:00 PM  | SSW       | 0.5            |
| 4 Jul 2025                | 7:00 PM  | WSW       | 0.4            |
| 4 Jul 2025                | 8:00 PM  | SW        | 0.5            |
| 4 Jul 2025                | 9:00 PM  | WSW       | 0.3            |
| 4 Jul 2025                | 10:00 PM | SSW       | 0.2            |
| 4 Jul 2025                | 11:00 PM | WSW       | 0.1            |
| 5 Jul 2025                | 12:00 AM | SSW       | 0.2            |
| 5 Jul 2025                | 1:00 AM  | SW        | 0.1            |
| 5 Jul 2025                | 2:00 AM  | W         | 0.1            |
| 5 Jul 2025                | 3:00 AM  | WSW       | 0.1            |
| 5 Jul 2025                | 4:00 AM  | WSW       | 0.0            |
| 5 Jul 2025                | 5:00 AM  | SSE       | 0.0            |
| 5 Jul 2025                | 6:00 AM  | WSW       | 0.3            |
| 5 Jul 2025                | 7:00 AM  | SSW       | 0.5            |
| 5 Jul 2025                | 8:00 AM  | SSW       | 0.4            |
| 5 Jul 2025                | 9:00 AM  | SSW       | 0.6            |
| 5 Jul 2025                | 10:00 AM | SW        | 0.6            |
| 5 Jul 2025                | 11:00 AM | SW        | 0.8            |
| 5 Jul 2025                | 12:00 PM | SW        | 0.5            |
| 5 Jul 2025                | 1:00 PM  | WSW       | 0.3            |
| 5 Jul 2025                | 2:00 PM  | SW        | 0.3            |
| 5 Jul 2025                | 3:00 PM  | SSW       | 0.5            |
| 5 Jul 2025                | 4:00 PM  | SSW       | 0.9            |
| 5 Jul 2025                | 5:00 PM  | SW        | 0.9            |

| July 2025                 |          |           |                |
|---------------------------|----------|-----------|----------------|
| Wind Speed and Directions |          |           |                |
| Date                      | Time     | Direction | Wind Speed m-s |
| 5 Jul 2025                | 6:00 PM  | WSW       | 0.4            |
| 5 Jul 2025                | 7:00 PM  | S         | 0.4            |
| 5 Jul 2025                | 8:00 PM  | SW        | 0.2            |
| 5 Jul 2025                | 9:00 PM  | SW        | 0.1            |
| 5 Jul 2025                | 10:00 PM | WSW       | 0.2            |
| 5 Jul 2025                | 11:00 PM | SSW       | 0.2            |
| 6 Jul 2025                | 12:00 AM | WSW       | 0.2            |
| 6 Jul 2025                | 1:00 AM  | W         | 0.2            |
| 6 Jul 2025                | 2:00 AM  | SSE       | 0.1            |
| 6 Jul 2025                | 3:00 AM  | SSW       | 0.2            |
| 6 Jul 2025                | 4:00 AM  | SSW       | 0.1            |
| 6 Jul 2025                | 5:00 AM  | SSW       | 0.3            |
| 6 Jul 2025                | 6:00 AM  | SW        | 0.1            |
| 6 Jul 2025                | 7:00 AM  | SSW       | 0.3            |
| 6 Jul 2025                | 8:00 AM  | WSW       | 0.2            |
| 6 Jul 2025                | 9:00 AM  | SSW       | 0.5            |
| 6 Jul 2025                | 10:00 AM | SSW       | 0.5            |
| 6 Jul 2025                | 11:00 AM | SSW       | 0.6            |
| 6 Jul 2025                | 12:00 PM | S         | 0.6            |
| 6 Jul 2025                | 1:00 PM  | SW        | 0.5            |
| 6 Jul 2025                | 2:00 PM  | SSW       | 0.5            |
| 6 Jul 2025                | 3:00 PM  | SW        | 0.2            |
| 6 Jul 2025                | 4:00 PM  | WSW       | 0.4            |
| 6 Jul 2025                | 5:00 PM  | WSW       | 0.4            |
| 6 Jul 2025                | 6:00 PM  | SSW       | 0.7            |
| 6 Jul 2025                | 7:00 PM  | WSW       | 0.5            |
| 6 Jul 2025                | 8:00 PM  | WSW       | 0.3            |
| 6 Jul 2025                | 9:00 PM  | WSW       | 0.5            |
| 6 Jul 2025                | 10:00 PM | SSW       | 0.4            |
| 6 Jul 2025                | 11:00 PM | SW        | 0.3            |
| 7 Jul 2025                | 12:00 AM | SW        | 0.2            |
| 7 Jul 2025                | 1:00 AM  | WSW       | 0.2            |
| 7 Jul 2025                | 2:00 AM  | S         | 0.4            |
| 7 Jul 2025                | 3:00 AM  | W         | 0.4            |
| 7 Jul 2025                | 4:00 AM  | SSW       | 0.4            |
| 7 Jul 2025                | 5:00 AM  | SW        | 0.3            |
| 7 Jul 2025                | 6:00 AM  | SSW       | 0.3            |
| 7 Jul 2025                | 7:00 AM  | SW        | 0.5            |
| 7 Jul 2025                | 8:00 AM  | SSW       | 0.7            |
| 7 Jul 2025                | 9:00 AM  | SSW       | 0.8            |
| 7 Jul 2025                | 10:00 AM | SSW       | 0.8            |
| 7 Jul 2025                | 11:00 AM | S         | 0.7            |
| 7 Jul 2025                | 12:00 PM | SSW       | 0.8            |
| 7 Jul 2025                | 1:00 PM  | S         | 0.9            |
| 7 Jul 2025                | 2:00 PM  | SSE       | 0.8            |
| 7 Jul 2025                | 3:00 PM  | SSW       | 0.7            |
| 7 Jul 2025                | 4:00 PM  | SW        | 0.6            |
| 7 Jul 2025                | 5:00 PM  | SSW       | 0.7            |
| 7 Jul 2025                | 6:00 PM  | SSW       | 0.5            |
| 7 Jul 2025                | 7:00 PM  | SSW       | 0.4            |
| 7 Jul 2025                | 8:00 PM  | SSW       | 0.5            |
| 7 Jul 2025                | 9:00 PM  | SW        | 0.6            |
| 7 Jul 2025                | 10:00 PM | SW        | 0.7            |
| 7 Jul 2025                | 11:00 PM | S         | 0.6            |
| 8 Jul 2025                | 12:00 AM | SSE       | 0.5            |
| 8 Jul 2025                | 1:00 AM  | SSW       | 0.6            |
| 8 Jul 2025                | 2:00 AM  | SSE       | 0.6            |

| July 2025                 |          |           |                |
|---------------------------|----------|-----------|----------------|
| Wind Speed and Directions |          |           |                |
| Date                      | Time     | Direction | Wind Speed m-s |
| 8 Jul 2025                | 3:00 AM  | SSW       | 0.5            |
| 8 Jul 2025                | 4:00 AM  | SW        | 0.5            |
| 8 Jul 2025                | 5:00 AM  | W         | 0.3            |
| 8 Jul 2025                | 6:00 AM  | SW        | 0.5            |
| 8 Jul 2025                | 7:00 AM  | WSW       | 0.4            |
| 8 Jul 2025                | 8:00 AM  | SW        | 0.6            |
| 8 Jul 2025                | 9:00 AM  | SSW       | 0.7            |
| 8 Jul 2025                | 10:00 AM | S         | 0.8            |
| 8 Jul 2025                | 11:00 AM | S         | 0.6            |
| 8 Jul 2025                | 12:00 PM | SSW       | 0.7            |
| 8 Jul 2025                | 1:00 PM  | SSW       | 1.0            |
| 8 Jul 2025                | 2:00 PM  | S         | 0.8            |
| 8 Jul 2025                | 3:00 PM  | SSW       | 0.6            |
| 8 Jul 2025                | 4:00 PM  | WSW       | 0.4            |
| 8 Jul 2025                | 5:00 PM  | SSW       | 0.5            |
| 8 Jul 2025                | 6:00 PM  | SSW       | 0.5            |
| 8 Jul 2025                | 7:00 PM  | SSW       | 0.5            |
| 8 Jul 2025                | 8:00 PM  | W         | 0.4            |
| 8 Jul 2025                | 9:00 PM  | WSW       | 0.4            |
| 8 Jul 2025                | 10:00 PM | SSW       | 0.6            |
| 8 Jul 2025                | 11:00 PM | SSW       | 0.7            |
| 9 Jul 2025                | 12:00 AM | SSW       | 0.5            |
| 9 Jul 2025                | 1:00 AM  | WSW       | 0.4            |
| 9 Jul 2025                | 2:00 AM  | SSW       | 0.5            |
| 9 Jul 2025                | 3:00 AM  | SSW       | 0.4            |
| 9 Jul 2025                | 4:00 AM  | SSW       | 0.4            |
| 9 Jul 2025                | 5:00 AM  | SW        | 0.4            |
| 9 Jul 2025                | 6:00 AM  | WSW       | 0.3            |
| 9 Jul 2025                | 7:00 AM  | SSW       | 0.4            |
| 9 Jul 2025                | 8:00 AM  | SSW       | 0.5            |
| 9 Jul 2025                | 9:00 AM  | S         | 0.9            |
| 9 Jul 2025                | 10:00 AM | SSW       | 0.6            |
| 9 Jul 2025                | 11:00 AM | SSW       | 0.4            |
| 9 Jul 2025                | 12:00 PM | S         | 0.6            |
| 9 Jul 2025                | 1:00 PM  | WSW       | 0.7            |
| 9 Jul 2025                | 2:00 PM  | SW        | 0.7            |
| 9 Jul 2025                | 3:00 PM  | SW        | 0.7            |
| 9 Jul 2025                | 4:00 PM  | S         | 0.6            |
| 9 Jul 2025                | 5:00 PM  | SW        | 0.4            |
| 9 Jul 2025                | 6:00 PM  | SW        | 0.4            |
| 9 Jul 2025                | 7:00 PM  | SSW       | 0.6            |
| 9 Jul 2025                | 8:00 PM  | SW        | 0.4            |
| 9 Jul 2025                | 9:00 PM  | SW        | 0.5            |
| 9 Jul 2025                | 10:00 PM | SSW       | 0.4            |
| 9 Jul 2025                | 11:00 PM | SW        | 0.9            |
| 10 Jul 2025               | 12:00 AM | S         | 0.3            |
| 10 Jul 2025               | 1:00 AM  | SW        | 0.1            |
| 10 Jul 2025               | 2:00 AM  | WNW       | 0.0            |
| 10 Jul 2025               | 3:00 AM  | SW        | 0.2            |
| 10 Jul 2025               | 4:00 AM  | WSW       | 0.2            |
| 10 Jul 2025               | 5:00 AM  | ESE       | 0.1            |
| 10 Jul 2025               | 6:00 AM  | ESE       | 0.0            |
| 10 Jul 2025               | 7:00 AM  | E         | 0.0            |
| 10 Jul 2025               | 8:00 AM  | SSW       | 0.3            |
| 10 Jul 2025               | 9:00 AM  | SSW       | 0.5            |
| 10 Jul 2025               | 10:00 AM | WSW       | 0.2            |
| 10 Jul 2025               | 11:00 AM | W         | 0.2            |

| July 2025                 |          |           |                |
|---------------------------|----------|-----------|----------------|
| Wind Speed and Directions |          |           |                |
| Date                      | Time     | Direction | Wind Speed m-s |
| 10 Jul 2025               | 12:00 PM | SSW       | 0.4            |
| 10 Jul 2025               | 1:00 PM  | WNW       | 0.2            |
| 10 Jul 2025               | 2:00 PM  | ENE       | 0.1            |
| 10 Jul 2025               | 3:00 PM  | SW        | 0.3            |
| 10 Jul 2025               | 4:00 PM  | NW        | 0.0            |
| 10 Jul 2025               | 5:00 PM  | SSE       | 0.0            |
| 10 Jul 2025               | 6:00 PM  | SSW       | 0.1            |
| 10 Jul 2025               | 7:00 PM  | SSW       | 0.1            |
| 10 Jul 2025               | 8:00 PM  | SSE       | 0.1            |
| 10 Jul 2025               | 9:00 PM  | ENE       | 0.0            |
| 10 Jul 2025               | 10:00 PM | NW        | 0.0            |
| 10 Jul 2025               | 11:00 PM | SSW       | 0.1            |
| 11 Jul 2025               | 12:00 AM | WSW       | 0.1            |
| 11 Jul 2025               | 1:00 AM  | WSW       | 0.0            |
| 11 Jul 2025               | 2:00 AM  | WSW       | 0.0            |
| 11 Jul 2025               | 3:00 AM  | WSW       | 0.0            |
| 11 Jul 2025               | 4:00 AM  | SW        | 0.2            |
| 11 Jul 2025               | 5:00 AM  | NW        | 0.0            |
| 11 Jul 2025               | 6:00 AM  | NNW       | 0.0            |
| 11 Jul 2025               | 7:00 AM  | WNW       | 0.0            |
| 11 Jul 2025               | 8:00 AM  | W         | 0.0            |
| 11 Jul 2025               | 9:00 AM  | SSW       | 0.2            |
| 11 Jul 2025               | 10:00 AM | SSW       | 0.4            |
| 11 Jul 2025               | 11:00 AM | SSW       | 0.2            |
| 11 Jul 2025               | 12:00 PM | SW        | 0.6            |
| 11 Jul 2025               | 1:00 PM  | S         | 0.6            |
| 11 Jul 2025               | 2:00 PM  | S         | 0.6            |
| 11 Jul 2025               | 3:00 PM  | S         | 0.7            |
| 11 Jul 2025               | 4:00 PM  | WSW       | 0.4            |
| 11 Jul 2025               | 5:00 PM  | SW        | 0.3            |
| 11 Jul 2025               | 6:00 PM  | SW        | 0.1            |
| 11 Jul 2025               | 7:00 PM  | SW        | 0.0            |
| 11 Jul 2025               | 8:00 PM  | SW        | 0.0            |
| 11 Jul 2025               | 9:00 PM  | W         | 0.0            |
| 11 Jul 2025               | 10:00 PM | WNW       | 0.0            |
| 11 Jul 2025               | 11:00 PM | WNW       | 0.0            |
| 12 Jul 2025               | 12:00 AM | NNW       | 0.0            |
| 12 Jul 2025               | 1:00 AM  | NW        | 0.0            |
| 12 Jul 2025               | 2:00 AM  | NW        | 0.0            |
| 12 Jul 2025               | 3:00 AM  | SW        | 0.1            |
| 12 Jul 2025               | 4:00 AM  | S         | 0.2            |
| 12 Jul 2025               | 5:00 AM  | S         | 0.1            |
| 12 Jul 2025               | 6:00 AM  | NNW       | 0.0            |
| 12 Jul 2025               | 7:00 AM  | N         | 0.1            |
| 12 Jul 2025               | 8:00 AM  | NNW       | 0.1            |
| 12 Jul 2025               | 9:00 AM  | S         | 0.0            |
| 12 Jul 2025               | 10:00 AM | S         | 0.3            |
| 12 Jul 2025               | 11:00 AM | WSW       | 0.4            |
| 12 Jul 2025               | 12:00 PM | WSW       | 0.3            |
| 12 Jul 2025               | 1:00 PM  | W         | 0.3            |
| 12 Jul 2025               | 2:00 PM  | SW        | 0.2            |
| 12 Jul 2025               | 3:00 PM  | WSW       | 0.1            |
| 12 Jul 2025               | 4:00 PM  | S         | 0.2            |
| 12 Jul 2025               | 5:00 PM  | SW        | 0.1            |
| 12 Jul 2025               | 6:00 PM  | SSW       | 0.1            |
| 12 Jul 2025               | 7:00 PM  | SW        | 0.0            |
| 12 Jul 2025               | 8:00 PM  | WSW       | 0.0            |

| July 2025                 |          |           |                |
|---------------------------|----------|-----------|----------------|
| Wind Speed and Directions |          |           |                |
| Date                      | Time     | Direction | Wind Speed m-s |
| 12 Jul 2025               | 9:00 PM  | W         | 0.0            |
| 12 Jul 2025               | 10:00 PM | W         | 0.0            |
| 12 Jul 2025               | 11:00 PM | W         | 0.0            |
| 13 Jul 2025               | 12:00 AM | W         | 0.0            |
| 13 Jul 2025               | 1:00 AM  | WNW       | 0.0            |
| 13 Jul 2025               | 2:00 AM  | SSE       | 0.0            |
| 13 Jul 2025               | 3:00 AM  | WNW       | 0.0            |
| 13 Jul 2025               | 4:00 AM  | NW        | 0.0            |
| 13 Jul 2025               | 5:00 AM  | WNW       | 0.0            |
| 13 Jul 2025               | 6:00 AM  | NW        | 0.0            |
| 13 Jul 2025               | 7:00 AM  | W         | 0.0            |
| 13 Jul 2025               | 8:00 AM  | W         | 0.0            |
| 13 Jul 2025               | 9:00 AM  | WNW       | 0.2            |
| 13 Jul 2025               | 10:00 AM | WSW       | 0.3            |
| 13 Jul 2025               | 11:00 AM | W         | 0.2            |
| 13 Jul 2025               | 12:00 PM | SE        | 0.4            |
| 13 Jul 2025               | 1:00 PM  | SW        | 0.5            |
| 13 Jul 2025               | 2:00 PM  | SSW       | 0.4            |
| 13 Jul 2025               | 3:00 PM  | WSW       | 0.3            |
| 13 Jul 2025               | 4:00 PM  | SW        | 0.1            |
| 13 Jul 2025               | 5:00 PM  | W         | 0.1            |
| 13 Jul 2025               | 6:00 PM  | WSW       | 0.1            |
| 13 Jul 2025               | 7:00 PM  | SSE       | 0.1            |
| 13 Jul 2025               | 8:00 PM  | NE        | 0.0            |
| 13 Jul 2025               | 9:00 PM  | NW        | 0.0            |
| 13 Jul 2025               | 10:00 PM | W         | 0.2            |
| 13 Jul 2025               | 11:00 PM | NNW       | 0.0            |
| 14 Jul 2025               | 12:00 AM | NW        | 0.0            |
| 14 Jul 2025               | 1:00 AM  | WSW       | 0.1            |
| 14 Jul 2025               | 2:00 AM  | WSW       | 0.1            |
| 14 Jul 2025               | 3:00 AM  | W         | 0.0            |
| 14 Jul 2025               | 4:00 AM  | WSW       | 0.0            |
| 14 Jul 2025               | 5:00 AM  | SW        | 0.1            |
| 14 Jul 2025               | 6:00 AM  | SW        | 0.0            |
| 14 Jul 2025               | 7:00 AM  | WSW       | 0.0            |
| 14 Jul 2025               | 8:00 AM  | SSE       | 0.0            |
| 14 Jul 2025               | 9:00 AM  | ENE       | 0.0            |
| 14 Jul 2025               | 10:00 AM | S         | 0.3            |
| 14 Jul 2025               | 11:00 AM | S         | 0.6            |
| 14 Jul 2025               | 12:00 PM | SSW       | 0.7            |
| 14 Jul 2025               | 1:00 PM  | S         | 0.8            |
| 14 Jul 2025               | 2:00 PM  | SSW       | 0.8            |
| 14 Jul 2025               | 3:00 PM  | S         | 0.6            |
| 14 Jul 2025               | 4:00 PM  | SW        | 0.5            |
| 14 Jul 2025               | 5:00 PM  | SW        | 0.3            |
| 14 Jul 2025               | 6:00 PM  | SW        | 0.3            |
| 14 Jul 2025               | 7:00 PM  | SSW       | 0.3            |
| 14 Jul 2025               | 8:00 PM  | SW        | 0.3            |
| 14 Jul 2025               | 9:00 PM  | SSW       | 0.2            |
| 14 Jul 2025               | 10:00 PM | WSW       | 0.2            |
| 14 Jul 2025               | 11:00 PM | WSW       | 0.2            |
| 15 Jul 2025               | 12:00 AM | WSW       | 0.2            |
| 15 Jul 2025               | 1:00 AM  | SSW       | 0.2            |
| 15 Jul 2025               | 2:00 AM  | WSW       | 0.2            |
| 15 Jul 2025               | 3:00 AM  | SSW       | 0.4            |
| 15 Jul 2025               | 4:00 AM  | SW        | 0.3            |
| 15 Jul 2025               | 5:00 AM  | SW        | 0.3            |

| July 2025                 |          |           |                |
|---------------------------|----------|-----------|----------------|
| Wind Speed and Directions |          |           |                |
| Date                      | Time     | Direction | Wind Speed m-s |
| 15 Jul 2025               | 6:00 AM  | WSW       | 0.2            |
| 15 Jul 2025               | 7:00 AM  | SE        | 0.3            |
| 15 Jul 2025               | 8:00 AM  | SW        | 0.3            |
| 15 Jul 2025               | 9:00 AM  | SSW       | 0.4            |
| 15 Jul 2025               | 10:00 AM | S         | 0.6            |
| 15 Jul 2025               | 11:00 AM | SSW       | 0.5            |
| 15 Jul 2025               | 12:00 PM | WSW       | 0.4            |
| 15 Jul 2025               | 1:00 PM  | WSW       | 0.5            |
| 15 Jul 2025               | 2:00 PM  | SSW       | 0.5            |
| 15 Jul 2025               | 3:00 PM  | S         | 0.4            |
| 15 Jul 2025               | 4:00 PM  | S         | 0.6            |
| 15 Jul 2025               | 5:00 PM  | SW        | 0.5            |
| 15 Jul 2025               | 6:00 PM  | S         | 0.3            |
| 15 Jul 2025               | 7:00 PM  | NW        | 0.2            |
| 15 Jul 2025               | 8:00 PM  | W         | 0.2            |
| 15 Jul 2025               | 9:00 PM  | SW        | 0.2            |
| 15 Jul 2025               | 10:00 PM | SW        | 0.2            |
| 15 Jul 2025               | 11:00 PM | SW        | 0.2            |
| 16 Jul 2025               | 12:00 AM | SSW       | 0.3            |
| 16 Jul 2025               | 1:00 AM  | W         | 0.3            |
| 16 Jul 2025               | 2:00 AM  | SSW       | 0.3            |
| 16 Jul 2025               | 3:00 AM  | SW        | 0.3            |
| 16 Jul 2025               | 4:00 AM  | SW        | 0.2            |
| 16 Jul 2025               | 5:00 AM  | S         | 0.3            |
| 16 Jul 2025               | 6:00 AM  | SSE       | 0.2            |
| 16 Jul 2025               | 7:00 AM  | SW        | 0.4            |
| 16 Jul 2025               | 8:00 AM  | SSW       | 0.5            |
| 16 Jul 2025               | 9:00 AM  | SW        | 0.6            |
| 16 Jul 2025               | 10:00 AM | S         | 0.8            |
| 16 Jul 2025               | 11:00 AM | SSW       | 0.8            |
| 16 Jul 2025               | 12:00 PM | SSW       | 0.9            |
| 16 Jul 2025               | 1:00 PM  | SW        | 0.7            |
| 16 Jul 2025               | 2:00 PM  | S         | 0.8            |
| 16 Jul 2025               | 3:00 PM  | S         | 0.7            |
| 16 Jul 2025               | 4:00 PM  | S         | 0.7            |
| 16 Jul 2025               | 5:00 PM  | SW        | 0.7            |
| 16 Jul 2025               | 6:00 PM  | SSW       | 0.5            |
| 16 Jul 2025               | 7:00 PM  | WNW       | 0.1            |
| 16 Jul 2025               | 8:00 PM  | WSW       | 0.1            |
| 16 Jul 2025               | 9:00 PM  | WSW       | 0.0            |
| 16 Jul 2025               | 10:00 PM | SW        | 0.1            |
| 16 Jul 2025               | 11:00 PM | SW        | 0.4            |
| 17 Jul 2025               | 12:00 AM | SW        | 0.3            |
| 17 Jul 2025               | 1:00 AM  | SSW       | 0.4            |
| 17 Jul 2025               | 2:00 AM  | S         | 0.3            |
| 17 Jul 2025               | 3:00 AM  | S         | 0.2            |
| 17 Jul 2025               | 4:00 AM  | SSW       | 0.2            |
| 17 Jul 2025               | 5:00 AM  | S         | 0.2            |
| 17 Jul 2025               | 6:00 AM  | SSW       | 0.2            |
| 17 Jul 2025               | 7:00 AM  | SSW       | 0.4            |
| 17 Jul 2025               | 8:00 AM  | SSW       | 0.7            |
| 17 Jul 2025               | 9:00 AM  | SSW       | 0.5            |
| 17 Jul 2025               | 10:00 AM | SSW       | 0.8            |
| 17 Jul 2025               | 11:00 AM | S         | 0.8            |
| 17 Jul 2025               | 12:00 PM | S         | 0.8            |
| 17 Jul 2025               | 1:00 PM  | S         | 0.7            |
| 17 Jul 2025               | 2:00 PM  | SE        | 0.8            |



| July 2025                 |          |           |                |
|---------------------------|----------|-----------|----------------|
| Wind Speed and Directions |          |           |                |
| Date                      | Time     | Direction | Wind Speed m-s |
| 17 Jul 2025               | 3:00 PM  | S         | 0.6            |
| 17 Jul 2025               | 4:00 PM  | S         | 0.7            |
| 17 Jul 2025               | 5:00 PM  | SSW       | 0.5            |
| 17 Jul 2025               | 6:00 PM  | S         | 0.6            |
| 17 Jul 2025               | 7:00 PM  | SW        | 0.4            |
| 17 Jul 2025               | 8:00 PM  | WNW       | 0.2            |
| 17 Jul 2025               | 9:00 PM  | WSW       | 0.2            |
| 17 Jul 2025               | 10:00 PM | SSE       | 0.2            |
| 17 Jul 2025               | 11:00 PM | SSW       | 0.3            |
| 18 Jul 2025               | 12:00 AM | SW        | 0.2            |
| 18 Jul 2025               | 1:00 AM  | W         | 0.1            |
| 18 Jul 2025               | 2:00 AM  | SW        | 0.1            |
| 18 Jul 2025               | 3:00 AM  | WSW       | 0.1            |
| 18 Jul 2025               | 4:00 AM  | W         | 0.3            |
| 18 Jul 2025               | 5:00 AM  | W         | 0.2            |
| 18 Jul 2025               | 6:00 AM  | WNW       | 0.1            |
| 18 Jul 2025               | 7:00 AM  | SSW       | 0.4            |
| 18 Jul 2025               | 8:00 AM  | SSW       | 0.3            |
| 18 Jul 2025               | 9:00 AM  | SW        | 0.5            |
| 18 Jul 2025               | 10:00 AM | SW        | 0.2            |
| 18 Jul 2025               | 11:00 AM | SSE       | 0.8            |
| 18 Jul 2025               | 12:00 PM | SSE       | 0.3            |
| 18 Jul 2025               | 1:00 PM  | SW        | 0.4            |
| 18 Jul 2025               | 2:00 PM  | SE        | 0.0            |
| 18 Jul 2025               | 3:00 PM  | SSE       | 0.1            |
| 18 Jul 2025               | 4:00 PM  | ESE       | 0.3            |
| 18 Jul 2025               | 5:00 PM  | S         | 0.6            |
| 18 Jul 2025               | 6:00 PM  | S         | 0.3            |
| 18 Jul 2025               | 7:00 PM  | SSE       | 0.3            |
| 18 Jul 2025               | 8:00 PM  | SSE       | 0.0            |
| 18 Jul 2025               | 9:00 PM  | E         | 0.2            |
| 18 Jul 2025               | 10:00 PM | S         | 0.1            |
| 18 Jul 2025               | 11:00 PM | SW        | 0.2            |
| 19 Jul 2025               | 12:00 AM | SE        | 0.2            |
| 19 Jul 2025               | 1:00 AM  | SW        | 0.0            |
| 19 Jul 2025               | 2:00 AM  | NNW       | 0.0            |
| 19 Jul 2025               | 3:00 AM  | WNW       | 0.0            |
| 19 Jul 2025               | 4:00 AM  | W         | 0.0            |
| 19 Jul 2025               | 5:00 AM  | E         | 0.2            |
| 19 Jul 2025               | 6:00 AM  | W         | 0.0            |
| 19 Jul 2025               | 7:00 AM  | W         | 0.0            |
| 19 Jul 2025               | 8:00 AM  | SSW       | 0.1            |
| 19 Jul 2025               | 9:00 AM  | SE        | 0.5            |
| 19 Jul 2025               | 10:00 AM | S         | 0.4            |
| 19 Jul 2025               | 11:00 AM | SSW       | 0.7            |
| 19 Jul 2025               | 12:00 PM | SW        | 0.8            |
| 19 Jul 2025               | 1:00 PM  | SW        | 0.8            |
| 19 Jul 2025               | 2:00 PM  | SSW       | 0.9            |
| 19 Jul 2025               | 3:00 PM  | WSW       | 0.9            |
| 19 Jul 2025               | 4:00 PM  | SSW       | 0.9            |
| 19 Jul 2025               | 5:00 PM  | WSW       | 0.4            |
| 19 Jul 2025               | 6:00 PM  | SSW       | 0.2            |
| 19 Jul 2025               | 7:00 PM  | S         | 0.2            |
| 19 Jul 2025               | 8:00 PM  | SSW       | 0.2            |
| 19 Jul 2025               | 9:00 PM  | W         | 0.2            |
| 19 Jul 2025               | 10:00 PM | SW        | 0.3            |
| 19 Jul 2025               | 11:00 PM | WSW       | 0.1            |

| July 2025                 |          |           |                |
|---------------------------|----------|-----------|----------------|
| Wind Speed and Directions |          |           |                |
| Date                      | Time     | Direction | Wind Speed m-s |
| 20 Jul 2025               | 12:00 AM | SW        | 0.2            |
| 20 Jul 2025               | 1:00 AM  | SSW       | 0.1            |
| 20 Jul 2025               | 2:00 AM  | SSW       | 0.0            |
| 20 Jul 2025               | 3:00 AM  | WSW       | 0.1            |
| 20 Jul 2025               | 4:00 AM  | S         | 0.0            |
| 20 Jul 2025               | 5:00 AM  | SSE       | 0.0            |
| 20 Jul 2025               | 6:00 AM  | WSW       | 0.0            |
| 20 Jul 2025               | 7:00 AM  | WSW       | 0.0            |
| 20 Jul 2025               | 8:00 AM  | ENE       | 0.0            |
| 20 Jul 2025               | 9:00 AM  | ESE       | 0.1            |
| 20 Jul 2025               | 10:00 AM | SW        | 0.3            |
| 20 Jul 2025               | 11:00 AM | SW        | 0.2            |
| 20 Jul 2025               | 12:00 PM | S         | 0.5            |
| 20 Jul 2025               | 1:00 PM  | SSW       | 0.5            |
| 20 Jul 2025               | 2:00 PM  | S         | 0.4            |
| 20 Jul 2025               | 3:00 PM  | SW        | 0.4            |
| 20 Jul 2025               | 4:00 PM  | SSW       | 0.1            |
| 20 Jul 2025               | 5:00 PM  | SW        | 0.0            |
| 20 Jul 2025               | 6:00 PM  | W         | 0.0            |
| 20 Jul 2025               | 7:00 PM  | SSW       | 0.0            |
| 20 Jul 2025               | 8:00 PM  | WSW       | 0.1            |
| 20 Jul 2025               | 9:00 PM  | W         | 0.1            |
| 20 Jul 2025               | 10:00 PM | WNW       | 0.0            |
| 20 Jul 2025               | 11:00 PM | W         | 0.0            |
| 21 Jul 2025               | 12:00 AM | SW        | 0.1            |
| 21 Jul 2025               | 1:00 AM  | W         | 0.0            |
| 21 Jul 2025               | 2:00 AM  | SW        | 0.0            |
| 21 Jul 2025               | 3:00 AM  | WNW       | 0.1            |
| 21 Jul 2025               | 4:00 AM  | S         | 0.0            |
| 21 Jul 2025               | 5:00 AM  | S         | 0.0            |
| 21 Jul 2025               | 6:00 AM  | S         | 0.0            |
| 21 Jul 2025               | 7:00 AM  | S         | 0.2            |
| 21 Jul 2025               | 8:00 AM  | SSW       | 0.3            |
| 21 Jul 2025               | 9:00 AM  | SW        | 0.3            |
| 21 Jul 2025               | 10:00 AM | SW        | 0.4            |
| 21 Jul 2025               | 11:00 AM | SSW       | 0.4            |
| 21 Jul 2025               | 12:00 PM | SSW       | 0.6            |
| 21 Jul 2025               | 1:00 PM  | SSW       | 0.7            |
| 21 Jul 2025               | 2:00 PM  | SSW       | 0.4            |
| 21 Jul 2025               | 3:00 PM  | SW        | 0.5            |
| 21 Jul 2025               | 4:00 PM  | SW        | 0.3            |
| 21 Jul 2025               | 5:00 PM  | WSW       | 0.0            |
| 21 Jul 2025               | 6:00 PM  | WSW       | 0.1            |
| 21 Jul 2025               | 7:00 PM  | W         | 0.1            |
| 21 Jul 2025               | 8:00 PM  | SSW       | 0.2            |
| 21 Jul 2025               | 9:00 PM  | W         | 0.0            |
| 21 Jul 2025               | 10:00 PM | W         | 0.1            |
| 21 Jul 2025               | 11:00 PM | SW        | 0.1            |
| 22 Jul 2025               | 12:00 AM | W         | 0.1            |
| 22 Jul 2025               | 1:00 AM  | SW        | 0.2            |
| 22 Jul 2025               | 2:00 AM  | W         | 0.0            |
| 22 Jul 2025               | 3:00 AM  | WSW       | 0.0            |
| 22 Jul 2025               | 4:00 AM  | W         | 0.0            |
| 22 Jul 2025               | 5:00 AM  | SW        | 0.0            |
| 22 Jul 2025               | 6:00 AM  | WNW       | 0.0            |
| 22 Jul 2025               | 7:00 AM  | WSW       | 0.1            |
| 22 Jul 2025               | 8:00 AM  | SW        | 0.2            |

| July 2025                 |          |           |                |
|---------------------------|----------|-----------|----------------|
| Wind Speed and Directions |          |           |                |
| Date                      | Time     | Direction | Wind Speed m-s |
| 22 Jul 2025               | 9:00 AM  | SSW       | 0.2            |
| 22 Jul 2025               | 10:00 AM | SSW       | 0.3            |
| 22 Jul 2025               | 11:00 AM | W         | 0.1            |
| 22 Jul 2025               | 12:00 PM | WSW       | 0.1            |
| 22 Jul 2025               | 1:00 PM  | SSW       | 0.2            |
| 22 Jul 2025               | 2:00 PM  | SW        | 0.3            |
| 22 Jul 2025               | 3:00 PM  | SW        | 0.2            |
| 22 Jul 2025               | 4:00 PM  | WSW       | 0.2            |
| 22 Jul 2025               | 5:00 PM  | SSW       | 0.2            |
| 22 Jul 2025               | 6:00 PM  | WSW       | 0.1            |
| 22 Jul 2025               | 7:00 PM  | SE        | 0.0            |
| 22 Jul 2025               | 8:00 PM  | W         | 0.0            |
| 22 Jul 2025               | 9:00 PM  | WSW       | 0.1            |
| 22 Jul 2025               | 10:00 PM | W         | 0.0            |
| 22 Jul 2025               | 11:00 PM | WSW       | 0.1            |
| 23 Jul 2025               | 12:00 AM | SSW       | 0.0            |
| 23 Jul 2025               | 1:00 AM  | W         | 0.0            |
| 23 Jul 2025               | 2:00 AM  | SW        | 0.1            |
| 23 Jul 2025               | 3:00 AM  | SE        | 0.1            |
| 23 Jul 2025               | 4:00 AM  | SW        | 0.1            |
| 23 Jul 2025               | 5:00 AM  | SW        | 0.0            |
| 23 Jul 2025               | 6:00 AM  | W         | 0.0            |
| 23 Jul 2025               | 7:00 AM  | W         | 0.0            |
| 23 Jul 2025               | 8:00 AM  | W         | 0.1            |
| 23 Jul 2025               | 9:00 AM  | SSE       | 0.4            |
| 23 Jul 2025               | 10:00 AM | SSW       | 0.4            |
| 23 Jul 2025               | 11:00 AM | SSW       | 0.5            |
| 23 Jul 2025               | 12:00 PM | S         | 0.6            |
| 23 Jul 2025               | 1:00 PM  | SW        | 0.7            |
| 23 Jul 2025               | 2:00 PM  | SSW       | 0.7            |
| 23 Jul 2025               | 3:00 PM  | SSW       | 0.7            |
| 23 Jul 2025               | 4:00 PM  | S         | 0.5            |
| 23 Jul 2025               | 5:00 PM  | SSW       | 0.6            |
| 23 Jul 2025               | 6:00 PM  | SSW       | 0.4            |
| 23 Jul 2025               | 7:00 PM  | WSW       | 0.2            |
| 23 Jul 2025               | 8:00 PM  | W         | 0.1            |
| 23 Jul 2025               | 9:00 PM  | SW        | 0.1            |
| 23 Jul 2025               | 10:00 PM | SSW       | 0.2            |
| 23 Jul 2025               | 11:00 PM | SW        | 0.2            |
| 24 Jul 2025               | 12:00 AM | SSW       | 0.2            |
| 24 Jul 2025               | 1:00 AM  | WSW       | 0.2            |
| 24 Jul 2025               | 2:00 AM  | WSW       | 0.2            |
| 24 Jul 2025               | 3:00 AM  | WSW       | 0.1            |
| 24 Jul 2025               | 4:00 AM  | WSW       | 0.1            |
| 24 Jul 2025               | 5:00 AM  | W         | 0.1            |
| 24 Jul 2025               | 6:00 AM  | W         | 0.1            |
| 24 Jul 2025               | 7:00 AM  | SW        | 0.2            |
| 24 Jul 2025               | 8:00 AM  | S         | 0.6            |
| 24 Jul 2025               | 9:00 AM  | SSW       | 0.7            |
| 24 Jul 2025               | 10:00 AM | SSW       | 0.6            |
| 24 Jul 2025               | 11:00 AM | S         | 0.7            |
| 24 Jul 2025               | 12:00 PM | S         | 0.9            |
| 24 Jul 2025               | 1:00 PM  | S         | 0.9            |
| 24 Jul 2025               | 2:00 PM  | SSW       | 0.8            |
| 24 Jul 2025               | 3:00 PM  | S         | 0.6            |
| 24 Jul 2025               | 4:00 PM  | SSW       | 0.4            |
| 24 Jul 2025               | 5:00 PM  | S         | 0.2            |

| July 2025                 |          |           |                |
|---------------------------|----------|-----------|----------------|
| Wind Speed and Directions |          |           |                |
| Date                      | Time     | Direction | Wind Speed m-s |
| 24 Jul 2025               | 6:00 PM  | SSW       | 0.2            |
| 24 Jul 2025               | 7:00 PM  | SW        | 0.1            |
| 24 Jul 2025               | 8:00 PM  | WSW       | 0.1            |
| 24 Jul 2025               | 9:00 PM  | WSW       | 0.0            |
| 24 Jul 2025               | 10:00 PM | W         | 0.1            |
| 24 Jul 2025               | 11:00 PM | WSW       | 0.1            |
| 25 Jul 2025               | 12:00 AM | WNW       | 0.0            |
| 25 Jul 2025               | 1:00 AM  | W         | 0.0            |
| 25 Jul 2025               | 2:00 AM  | W         | 0.0            |
| 25 Jul 2025               | 3:00 AM  | NNW       | 0.0            |
| 25 Jul 2025               | 4:00 AM  | NNW       | 0.0            |
| 25 Jul 2025               | 5:00 AM  | WNW       | 0.0            |
| 25 Jul 2025               | 6:00 AM  | WSW       | 0.0            |
| 25 Jul 2025               | 7:00 AM  | WSW       | 0.1            |
| 25 Jul 2025               | 8:00 AM  | SSW       | 0.4            |
| 25 Jul 2025               | 9:00 AM  | S         | 0.5            |
| 25 Jul 2025               | 10:00 AM | SW        | 0.6            |
| 25 Jul 2025               | 11:00 AM | WSW       | 0.8            |
| 25 Jul 2025               | 12:00 PM | SSW       | 0.7            |
| 25 Jul 2025               | 1:00 PM  | SW        | 0.8            |
| 25 Jul 2025               | 2:00 PM  | SSW       | 0.7            |
| 25 Jul 2025               | 3:00 PM  | SW        | 0.6            |
| 25 Jul 2025               | 4:00 PM  | SW        | 0.6            |
| 25 Jul 2025               | 5:00 PM  | SSW       | 0.6            |
| 25 Jul 2025               | 6:00 PM  | SW        | 0.5            |
| 25 Jul 2025               | 7:00 PM  | SW        | 0.4            |
| 25 Jul 2025               | 8:00 PM  | WSW       | 0.6            |
| 25 Jul 2025               | 9:00 PM  | SSW       | 0.4            |
| 25 Jul 2025               | 10:00 PM | SW        | 0.5            |
| 25 Jul 2025               | 11:00 PM | WSW       | 0.5            |
| 26 Jul 2025               | 12:00 AM | SW        | 0.4            |
| 26 Jul 2025               | 1:00 AM  | WSW       | 0.4            |
| 26 Jul 2025               | 2:00 AM  | SW        | 0.3            |
| 26 Jul 2025               | 3:00 AM  | SW        | 0.4            |
| 26 Jul 2025               | 4:00 AM  | SW        | 0.2            |
| 26 Jul 2025               | 5:00 AM  | SW        | 0.5            |
| 26 Jul 2025               | 6:00 AM  | SSW       | 0.2            |
| 26 Jul 2025               | 7:00 AM  | S         | 0.3            |
| 26 Jul 2025               | 8:00 AM  | SSW       | 0.7            |
| 26 Jul 2025               | 9:00 AM  | SSW       | 0.8            |
| 26 Jul 2025               | 10:00 AM | SW        | 0.3            |
| 26 Jul 2025               | 11:00 AM | SW        | 0.5            |
| 26 Jul 2025               | 12:00 PM | WSW       | 0.6            |
| 26 Jul 2025               | 1:00 PM  | WSW       | 0.6            |
| 26 Jul 2025               | 2:00 PM  | SW        | 0.5            |
| 26 Jul 2025               | 3:00 PM  | WSW       | 0.3            |
| 26 Jul 2025               | 4:00 PM  | SSW       | 0.4            |
| 26 Jul 2025               | 5:00 PM  | WNW       | 0.2            |
| 26 Jul 2025               | 6:00 PM  | WSW       | 0.1            |
| 26 Jul 2025               | 7:00 PM  | WSW       | 0.1            |
| 26 Jul 2025               | 8:00 PM  | WSW       | 0.1            |
| 26 Jul 2025               | 9:00 PM  | SW        | 0.3            |
| 26 Jul 2025               | 10:00 PM | SW        | 0.2            |
| 26 Jul 2025               | 11:00 PM | W         | 0.2            |
| 27 Jul 2025               | 12:00 AM | SW        | 0.3            |
| 27 Jul 2025               | 1:00 AM  | W         | 0.3            |
| 27 Jul 2025               | 2:00 AM  | WSW       | 0.1            |

| July 2025                 |          |           |                |
|---------------------------|----------|-----------|----------------|
| Wind Speed and Directions |          |           |                |
| Date                      | Time     | Direction | Wind Speed m-s |
| 27 Jul 2025               | 3:00 AM  | SW        | 0.1            |
| 27 Jul 2025               | 4:00 AM  | WSW       | 0.1            |
| 27 Jul 2025               | 5:00 AM  | WNW       | 0.0            |
| 27 Jul 2025               | 6:00 AM  | W         | 0.0            |
| 27 Jul 2025               | 7:00 AM  | W         | 0.1            |
| 27 Jul 2025               | 8:00 AM  | SSW       | 0.1            |
| 27 Jul 2025               | 9:00 AM  | WSW       | 0.2            |
| 27 Jul 2025               | 10:00 AM | SSW       | 0.3            |
| 27 Jul 2025               | 11:00 AM | SW        | 0.1            |
| 27 Jul 2025               | 12:00 PM | SW        | 0.2            |
| 27 Jul 2025               | 1:00 PM  | SSE       | 0.3            |
| 27 Jul 2025               | 2:00 PM  | SW        | 0.6            |
| 27 Jul 2025               | 3:00 PM  | SW        | 0.7            |
| 27 Jul 2025               | 4:00 PM  | SW        | 0.4            |
| 27 Jul 2025               | 5:00 PM  | SSW       | 0.2            |
| 27 Jul 2025               | 6:00 PM  | W         | 0.3            |
| 27 Jul 2025               | 7:00 PM  | SW        | 0.4            |
| 27 Jul 2025               | 8:00 PM  | WSW       | 0.1            |
| 27 Jul 2025               | 9:00 PM  | W         | 0.1            |
| 27 Jul 2025               | 10:00 PM | WSW       | 0.2            |
| 27 Jul 2025               | 11:00 PM | SSW       | 0.3            |
| 28 Jul 2025               | 12:00 AM | WSW       | 0.2            |
| 28 Jul 2025               | 1:00 AM  | W         | 0.2            |
| 28 Jul 2025               | 2:00 AM  | WSW       | 0.1            |
| 28 Jul 2025               | 3:00 AM  | W         | 0.2            |
| 28 Jul 2025               | 4:00 AM  | WSW       | 0.1            |
| 28 Jul 2025               | 5:00 AM  | WNW       | 0.0            |
| 28 Jul 2025               | 6:00 AM  | NW        | 0.2            |
| 28 Jul 2025               | 7:00 AM  | SSW       | 0.1            |
| 28 Jul 2025               | 8:00 AM  | NW        | 0.4            |
| 28 Jul 2025               | 9:00 AM  | NW        | 0.3            |
| 28 Jul 2025               | 10:00 AM | SW        | 0.4            |
| 28 Jul 2025               | 11:00 AM | SSW       | 0.5            |
| 28 Jul 2025               | 12:00 PM | WSW       | 0.5            |
| 28 Jul 2025               | 1:00 PM  | SW        | 0.4            |
| 28 Jul 2025               | 2:00 PM  | WSW       | 0.5            |

| July 2025                 |          |           |                |
|---------------------------|----------|-----------|----------------|
| Wind Speed and Directions |          |           |                |
| Date                      | Time     | Direction | Wind Speed m-s |
| 28 Jul 2025               | 3:00 PM  | SW        | 0.6            |
| 28 Jul 2025               | 4:00 PM  | WSW       | 0.7            |
| 28 Jul 2025               | 5:00 PM  | W         | 0.5            |
| 28 Jul 2025               | 6:00 PM  | WSW       | 0.5            |
| 28 Jul 2025               | 7:00 PM  | SW        | 0.4            |
| 28 Jul 2025               | 8:00 PM  | WSW       | 0.2            |
| 28 Jul 2025               | 9:00 PM  | SW        | 0.2            |
| 28 Jul 2025               | 10:00 PM | SW        | 0.2            |
| 28 Jul 2025               | 11:00 PM | SW        | 0.1            |
| 29 Jul 2025               | 12:00 AM | SW        | 0.2            |
| 29 Jul 2025               | 1:00 AM  | SW        | 0.1            |
| 29 Jul 2025               | 2:00 AM  | S         | 0.0            |
| 29 Jul 2025               | 3:00 AM  | NNW       | 0.1            |
| 29 Jul 2025               | 4:00 AM  | SW        | 0.0            |
| 29 Jul 2025               | 5:00 AM  | W         | 0.0            |
| 29 Jul 2025               | 6:00 AM  | SW        | 0.1            |
| 29 Jul 2025               | 7:00 AM  | SW        | 0.1            |
| 29 Jul 2025               | 8:00 AM  | WNW       | 0.1            |
| 29 Jul 2025               | 9:00 AM  | W         | 0.3            |
| 29 Jul 2025               | 10:00 AM | SW        | 0.6            |
| 29 Jul 2025               | 11:00 AM | SW        | 0.7            |
| 29 Jul 2025               | 12:00 PM | SW        | 0.6            |
| 29 Jul 2025               | 1:00 PM  | SSW       | 0.3            |
| 29 Jul 2025               | 2:00 PM  | WSW       | 0.3            |
| 29 Jul 2025               | 3:00 PM  | SSW       | 0.6            |
| 29 Jul 2025               | 4:00 PM  | SSW       | 0.5            |
| 29 Jul 2025               | 5:00 PM  | WSW       | 0.4            |
| 29 Jul 2025               | 6:00 PM  | WSW       | 0.5            |
| 29 Jul 2025               | 7:00 PM  | SW        | 0.4            |
| 29 Jul 2025               | 8:00 PM  | WSW       | 0.2            |
| 29 Jul 2025               | 9:00 PM  | WSW       | 0.1            |
| 29 Jul 2025               | 10:00 PM | SW        | 0.2            |
| 29 Jul 2025               | 11:00 PM | SSE       | 0.2            |
| 30 Jul 2025               | 12:00 AM | SW        | 0.2            |
| 30 Jul 2025               | 1:00 AM  | SW        | 0.3            |
| 30 Jul 2025               | 2:00 AM  | WSW       | 0.2            |
| 30 Jul 2025               | 3:00 AM  | WSW       | 0.2            |
| 30 Jul 2025               | 4:00 AM  | SSW       | 0.1            |
| 30 Jul 2025               | 5:00 AM  | W         | 0.1            |
| 30 Jul 2025               | 6:00 AM  | W         | 0.2            |
| 30 Jul 2025               | 7:00 AM  | W         | 0.2            |
| 30 Jul 2025               | 8:00 AM  | SW        | 0.4            |
| 30 Jul 2025               | 9:00 AM  | SSW       | 0.3            |
| 30 Jul 2025               | 10:00 AM | SW        | 0.4            |
| 30 Jul 2025               | 11:00 AM | WSW       | 0.5            |
| 30 Jul 2025               | 12:00 PM | W         | 0.7            |
| 30 Jul 2025               | 1:00 PM  | SW        | 0.4            |
| 30 Jul 2025               | 2:00 PM  | SW        | 0.6            |
| 30 Jul 2025               | 3:00 PM  | SW        | 0.6            |
| 30 Jul 2025               | 4:00 PM  | SW        | 0.5            |
| 30 Jul 2025               | 5:00 PM  | WSW       | 0.6            |
| 30 Jul 2025               | 6:00 PM  | SW        | 0.6            |
| 30 Jul 2025               | 7:00 PM  | WSW       | 0.4            |
| 30 Jul 2025               | 8:00 PM  | SW        | 0.3            |
| 30 Jul 2025               | 9:00 PM  | SW        | 0.5            |
| 30 Jul 2025               | 10:00 PM | W         | 0.1            |
| 30 Jul 2025               | 11:00 PM | W         | 0.2            |

| July 2025                 |          |           |                |
|---------------------------|----------|-----------|----------------|
| Wind Speed and Directions |          |           |                |
| Date                      | Time     | Direction | Wind Speed m-s |
| 31 Jul 2025               | 12:00 AM | SSW       | 0.0            |
| 31 Jul 2025               | 1:00 AM  | WSW       | 0.0            |
| 31 Jul 2025               | 2:00 AM  | WSW       | 0.0            |
| 31 Jul 2025               | 3:00 AM  | WSW       | 0.0            |
| 31 Jul 2025               | 4:00 AM  | WSW       | 0.0            |
| 31 Jul 2025               | 5:00 AM  | W         | 0.0            |
| 31 Jul 2025               | 6:00 AM  | W         | 0.0            |
| 31 Jul 2025               | 7:00 AM  | SW        | 0.1            |
| 31 Jul 2025               | 8:00 AM  | S         | 0.4            |
| 31 Jul 2025               | 9:00 AM  | SSW       | 0.5            |
| 31 Jul 2025               | 10:00 AM | SSW       | 0.6            |
| 31 Jul 2025               | 11:00 AM | S         | 0.8            |
| 31 Jul 2025               | 12:00 PM | S         | 0.7            |
| 31 Jul 2025               | 1:00 PM  | S         | 0.8            |
| 31 Jul 2025               | 2:00 PM  | SSW       | 0.7            |
| 31 Jul 2025               | 3:00 PM  | S         | 0.6            |
| 31 Jul 2025               | 4:00 PM  | SSW       | 0.6            |
| 31 Jul 2025               | 5:00 PM  | S         | 0.6            |
| 31 Jul 2025               | 6:00 PM  | SSW       | 0.5            |
| 31 Jul 2025               | 7:00 PM  | SW        | 0.4            |
| 31 Jul 2025               | 8:00 PM  | WSW       | 0.6            |
| 31 Jul 2025               | 9:00 PM  | WSW       | 0.4            |
| 31 Jul 2025               | 10:00 PM | W         | 0.5            |
| 31 Jul 2025               | 11:00 PM | WSW       | 0.5            |

---

**APPENDIX F**  
**24-HOUR TSP MONITORING RESULTS**  
**AND GRAPHICAL PRESENTATIONS**

---



# Appendix F - 24-hour TSP Impact Monitoring Results

## Location CKL1 - Flat 121 Cha Kwo Ling Village

| Start Date  | Weather Condition | Air Temp. (K) | Atmospheric Pressure, Pa (mmHg) | Filter Weight (g) |        | Particulate weight (g) | Elapse Time |         | Sampling Time (hrs.) | Flow Rate (m³/min.) |       | Av. Flow (m³/min) | Total vol (m³) | Conc. (µg/m³) | Action Level (µg/m3) | Limit Level (µg/m3) |  |
|---|-------------------|---------------|---------------------------------|-------------------|--------|------------------------|-------------|---------|----------------------|---------------------|-------|-------------------|----------------|---------------|----------------------|---------------------|--|
|   |                   |               |                                 | Initial           | Final  |                        | Initial     | Final   |                      | Initial             | Final |                   |                |               |                      |                     |  |
| 2-Jul-25  | Sunny             | 303.2         | 757.1                           | 2.8445            | 2.8872 | 0.0427                 | 15441.0     | 15465.0 | 24.0                 | 1.19                | 1.19  | 1.19              | 1707.3         | 25.0          | 191.0                | 260.0               |  |
| 8-Jul-25  | Fine              | 303.8         | 752.0                           | 2.8238            | 2.8999 | 0.0761                 | 15465.0     | 15489.0 | 24.0                 | 1.22                | 1.22  | 1.22              | 1751.3         | 43.5          |                      |                     |  |
| 14-Jul-25   | Fine              | 303.3         | 754.0                           | 2.7012            | 2.7681 | 0.0669                 | 15489.0     | 15513.0 | 24.0                 | 1.22                | 1.22  | 1.22              | 1754.2         | 38.1          |                      |                     |  |
| 19-Jul-25   | Cloudy            | 301.3         | 744.5                           | 2.8323            | 2.8883 | 0.0560                 | 15513.0     | 15537.0 | 24.0                 | 1.21                | 1.22  | 1.22              | 1750.3         | 32.0          |                      |                     |  |
| 24-Jul-25   | Sunny             | 302.3         | 751.8                           | 2.8378            | 2.9112 | 0.0734                 | 15537.0     | 15561.0 | 24.0                 | 1.22                | 1.22  | 1.22              | 1754.3         | 41.9          |                      |                     |  |
| 30-Jul-25   | Fine              | 302.9         | 749.5                           | 2.7586            | 2.8297 | 0.0711                 | 15561.0     | 15585.0 | 24.0                 | 1.22                | 1.22  | 1.22              | 1751.2         | 40.6          |                      |                     |  |
| Note: <b><i>Bold Italic</i></b> means Action Level exceedance         |                   |               |                                 |                   |        |                        |             |         |                      |                     |       |                   | Min            | 25.0          |                      |                     |  |
| <b><i>Bold Italic with underline</i></b> means Limit Level exceedance |                   |               |                                 |                   |        |                        |             |         |                      |                     |       |                   | Max            | 43.5          |                      |                     |  |
|   |                   |               |                                 |                   |        |                        |             |         |                      |                     |       |                   | Average        | 36.8          |                      |                     |  |

## Location CKL2 - Flat 103 Cha Kwo Ling Village

| Start Date  | Weather Condition | Air Temp. (K) | Atmospheric Pressure, Pa (mmHg) | Filter Weight (g) |        | Particulate weight (g) | Elapse Time |         | Sampling Time (hrs.) | Flow Rate (m <sup>3</sup> /min.) |       | Av. Flow (m <sup>3</sup> /min) | Total vol. (m <sup>3</sup> ) | Conc. (µg/m <sup>3</sup> ) | Action Level (µg/m3) | Limit Level (µg/m3) |  |
|---|-------------------|---------------|---------------------------------|-------------------|--------|------------------------|-------------|---------|----------------------|----------------------------------|-------|--------------------------------|------------------------------|----------------------------|----------------------|---------------------|--|
|   |                   |               |                                 | Initial           | Final  |                        | Initial     | Final   |                      | Initial                          | Final |                                |                              |                            |                      |                     |  |
| 2-Jul-25  | Fine              | 303.2         | 757.1                           | 2.8276            | 2.9411 | 0.1135                 | 22058.3     | 22082.3 | 24.0                 | 1.19                             | 1.19  | 1.19                           | 1711.8                       | 66.3                       | 183.0                | 260.0               |  |
| 8-Jul-25  | Sunny             | 303.8         | 752.0                           | 2.8079            | 3.0204 | 0.2124                 | 22082.3     | 22106.3 | 24.0                 | 1.22                             | 1.22  | 1.22                           | 1751.3                       | 121.3                      |                      |                     |  |
| 14-Jul-25   | Fine              | 303.3         | 754.0                           | 2.7552            | 2.8270 | 0.0718                 | 22106.3     | 22130.3 | 24.0                 | 1.22                             | 1.22  | 1.22                           | 1754.4                       | 40.9                       |                      |                     |  |
| 19-Jul-25   | Cloudy            | 301.3         | 744.5                           | 2.8260            | 2.8906 | 0.0646                 | 22130.3     | 22154.3 | 24.0                 | 1.21                             | 1.22  | 1.22                           | 1750.2                       | 36.9                       |                      |                     |  |
| 24-Jul-25   | Sunny             | 302.3         | 751.8                           | 2.8207            | 3.0342 | 0.2136                 | 22154.3     | 22178.3 | 24.0                 | 1.22                             | 1.22  | 1.22                           | 1754.5                       | 121.7                      |                      |                     |  |
| 30-Jul-25   | Fine              | 302.9         | 749.5                           | 2.7912            | 2.9562 | 0.1650                 | 22178.3     | 22202.3 | 24.0                 | 1.22                             | 1.22  | 1.22                           | 1751.1                       | 94.2                       |                      |                     |  |
| Note: <b><i>Bold Italic</i></b> means Action Level exceedance         |                   |               |                                 |                   |        |                        |             |         |                      |                                  |       |                                | Min                          | 36.9                       |                      |                     |  |
| <b><i>Bold Italic with underline</i></b> means Limit Level exceedance |                   |               |                                 |                   |        |                        |             |         |                      |                                  |       |                                | Max                          | 121.7                      |                      |                     |  |
|   |                   |               |                                 |                   |        |                        |             |         |                      |                                  |       |                                | Average                      | 80.2                       |                      |                     |  |

## Location KTD1 - Centre of Excellence in Paediatrics (Children's Hospital)

| Start Date  | Weather Condition | Air Temp. (K) | Atmospheric Pressure, Pa (mmHg) | Filter Weight (g) |        | Particulate weight (g) | Elapse Time |         | Sampling Time (hrs.) | Flow Rate (m³/min.) |       | Av. Flow (m³/min) | Total vol. (m³) | Conc. (µg/m³) | Action Level (µg/m3) | Limit Level (µg/m3) |  |
|---|-------------------|---------------|---------------------------------|-------------------|--------|------------------------|-------------|---------|----------------------|---------------------|-------|-------------------|-----------------|---------------|----------------------|---------------------|--|
|   |                   |               |                                 | Initial           | Final  |                        | Initial     | Final   |                      | Initial             | Final |                   |                 |               |                      |                     |  |
| 2-Jul-25  | Sunny             | 303.2         | 757.1                           | 2.7365            | 2.7623 | 0.0258                 | 20836.6     | 20860.6 | 24.0                 | 1.21                | 1.20  | 1.21              | 1735.3          | 14.9          | 177.0                | 260.0               |  |
| 8-Jul-25  | Fine              | 303.8         | 752.0                           | 2.7697            | 2.8127 | 0.0430                 | 20860.6     | 20884.6 | 24.0                 | 1.20                | 1.20  | 1.20              | 1728.7          | 24.9          |                      |                     |  |
| 14-Jul-25   | Fine              | 303.3         | 754.0                           | 2.8573            | 2.8959 | 0.0386                 | 20884.6     | 20908.6 | 24.0                 | 1.20                | 1.20  | 1.20              | 1732.0          | 22.3          |                      |                     |  |
| 19-Jul-25   | Cloudy            | 301.3         | 744.5                           | 2.8486            | 2.8957 | 0.0471                 | 20908.6     | 20932.6 | 24.0                 | 1.21                | 1.21  | 1.21              | 1747.5          | 26.9          |                      |                     |  |
| 24-Jul-25   | Sunny             | 302.3         | 751.8                           | 2.8554            | 2.9010 | 0.0456                 | 20932.6     | 20956.6 | 24.0                 | 1.22                | 1.22  | 1.22              | 1752.2          | 26.0          |                      |                     |  |
| 30-Jul-25   | Fine              | 302.9         | 749.5                           | 2.8311            | 2.8906 | 0.0596                 | 20956.6     | 20980.6 | 24.0                 | 1.21                | 1.21  | 1.21              | 1748.5          | 34.1          |                      |                     |  |
| Note: <b><i>Bold Italic</i></b> means Action Level exceedance         |                   |               |                                 |                   |        |                        |             |         |                      |                     |       |                   | Min             | 14.9          |                      |                     |  |
| <b><i>Bold Italic with underline</i></b> means Limit Level exceedance |                   |               |                                 |                   |        |                        |             |         |                      |                     |       |                   | Max             | 34.1          |                      |                     |  |
|   |                   |               |                                 |                   |        |                        |             |         |                      |                     |       |                   | Average         | 24.8          |                      |                     |  |



## Location KER1 - Future Residential Development at Kerry Godown

| Start Date  | Weather Condition | Air Temp. (K) | Atmospheric Pressure, Pa (mmHg) | Filter Weight (g) |        | Particulate weight (g) | Elapse Time |         | Sampling Time (hrs.) | Flow Rate (m <sup>3</sup> /min.) |       | Av. Flow (m <sup>3</sup> /min) | Total vol. (m <sup>3</sup> ) | Conc. (µg/m <sup>3</sup> ) | Action Level (µg/m3) | Limit Level (µg/m3) |
|---|-------------------|---------------|---------------------------------|-------------------|--------|------------------------|-------------|---------|----------------------|----------------------------------|-------|--------------------------------|------------------------------|----------------------------|----------------------|---------------------|
|   |                   |               |                                 | Initial           | Final  |                        | Initial     | Final   |                      | Initial                          | Final |                                |                              |                            |                      |                     |
| 2-Jul-25  | Sunny             | 303.2         | 757.1                           | 2.7679            | 2.8110 | 0.0431                 | 18668.6     | 18692.7 | 24.0                 | 1.20                             | 1.20  | 1.20                           | 1736.3                       | 24.8                       | 172.0                | 260.0               |
| 8-Jul-25  | Fine              | 303.8         | 752.0                           | 2.8532            | 2.9194 | 0.0663                 | 18692.7     | 18716.7 | 24.0                 | 1.20                             | 1.20  | 1.20                           | 1725.8                       | 38.4                       |                      |                     |
| 14-Jul-25   | Fine              | 303.3         | 754.0                           | 2.7759            | 2.8188 | 0.0429                 | 18716.7     | 18740.7 | 24.0                 | 1.20                             | 1.20  | 1.20                           | 1729.3                       | 24.8                       |                      |                     |
| 19-Jul-25   | Cloudy            | 301.3         | 744.5                           | 2.8393            | 2.8961 | 0.0568                 | 18740.7     | 18764.7 | 24.0                 | 1.21                             | 1.21  | 1.21                           | 1745.7                       | 32.5                       |                      |                     |
| 24-Jul-25   | Sunny             | 302.3         | 751.8                           | 2.7284            | 2.7695 | 0.0412                 | 18764.7     | 18788.7 | 24.0                 | 1.22                             | 1.22  | 1.22                           | 1750.3                       | 23.5                       |                      |                     |
| 30-Jul-25   | Fine              | 302.9         | 749.5                           | 2.8399            | 2.8820 | 0.0421                 | 18788.7     | 18812.7 | 24.0                 | 1.21                             | 1.21  | 1.21                           | 1746.7                       | 24.1                       |                      |                     |
| Note: <b><i>Bold Italic</i></b> means Action Level exceedance         |                   |               |                                 |                   |        |                        |             |         |                      |                                  |       |                                | Min                          | 23.5                       |                      |                     |
| <b><i>Bold Italic with underline</i></b> means Limit Level exceedance |                   |               |                                 |                   |        |                        |             |         |                      |                                  |       |                                | Max                          | 38.4                       |                      |                     |
|   |                   |               |                                 |                   |        |                        |             |         |                      |                                  |       |                                | Average                      | 28.0                       |                      |                     |

## Location KTD2d - Next to the SOR Office of Trunk Road T2 in Kai Tak Area



| Start Date  | Weather Condition | Air Temp. (K) | Atmospheric Pressure, Pa (mmHg) | Filter Weight (g) |        | Particulate weight (g) | Elapse Time |         | Sampling Time (hrs.) | Flow Rate (m <sup>3</sup> /min.) |       | Av. Flow (m <sup>3</sup> /min) | Total vol. (m <sup>3</sup> ) | Conc. (µg/m <sup>3</sup> ) | Action Level (µg/m3) | Limit Level (µg/m3) |  |
|---|-------------------|---------------|---------------------------------|-------------------|--------|------------------------|-------------|---------|----------------------|----------------------------------|-------|--------------------------------|------------------------------|----------------------------|----------------------|---------------------|--|
|   |                   |               |                                 | Initial           | Final  |                        | Initial     | Final   |                      | Initial                          | Final |                                |                              |                            |                      |                     |  |
| 2-Jul-25  | Sunny             | 303.2         | 757.1                           | 2.7809            | 2.8113 | 0.0304                 | 19420.2     | 19444.2 | 24.0                 | 1.21                             | 1.21  | 1.21                           | 1737.5                       | 17.5                       | 157.0                | 260.0               |  |
| 8-Jul-25  | Fine              | 303.8         | 752.0                           | 2.8074            | 2.8876 | 0.0802                 | 19444.2     | 19468.2 | 24.0                 | 1.20                             | 1.20  | 1.20                           | 1731.3                       | 46.3                       |                      |                     |  |
| 14-Jul-25   | Fine              | 303.3         | 754.0                           | 2.7596            | 2.8200 | 0.0604                 | 19468.2     | 19492.2 | 24.0                 | 1.20                             | 1.20  | 1.20                           | 1734.4                       | 34.8                       |                      |                     |  |
| 19-Jul-25   | Cloudy            | 301.3         | 744.5                           | 2.8438            | 2.9154 | 0.0716                 | 19492.2     | 19516.2 | 24.0                 | 1.21                             | 1.21  | 1.21                           | 1746.7                       | 41.0                       |                      |                     |  |
| 24-Jul-25   | Sunny             | 302.3         | 751.8                           | 2.8195            | 2.9075 | 0.0880                 | 19516.2     | 19540.2 | 24.0                 | 1.22                             | 1.22  | 1.22                           | 1750.9                       | 50.2                       |                      |                     |  |
| 30-Jul-25   | Fine              | 302.9         | 749.5                           | 2.8452            | 2.9129 | 0.0677                 | 19540.3     | 19564.3 | 24.0                 | 1.21                             | 1.21  | 1.21                           | 1747.6                       | 38.7                       |                      |                     |  |
| Note: <b><i>Bold Italic</i></b> means Action Level exceedance         |                   |               |                                 |                   |        |                        |             |         |                      |                                  |       |                                | Min                          | 17.5                       |                      |                     |  |
| <b><i>Bold Italic with underline</i></b> means Limit Level exceedance |                   |               |                                 |                   |        |                        |             |         |                      |                                  |       |                                | Max                          | 50.2                       |                      |                     |  |
|   |                   |               |                                 |                   |        |                        |             |         |                      |                                  |       |                                | Average                      | 38.1                       |                      |                     |  |

## 24-hr TSP Concentration Levels

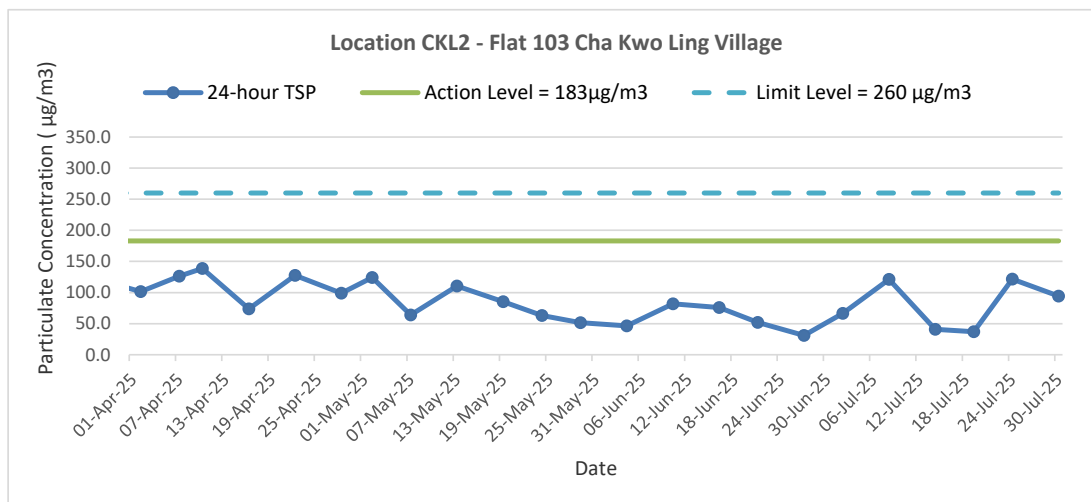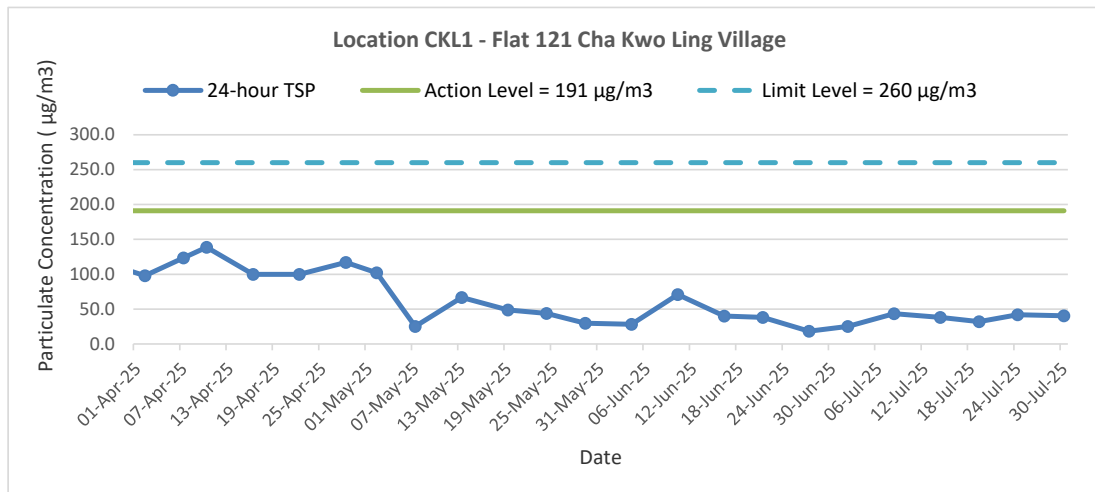


|       |   |      |         |             |         |          |
|-------|---|------|---------|-------------|---------|----------|
| Title | Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron | Date | Jul -25 | Project No. | MA20003 | CINOTECH |
|       | Graphical Presentation of 24-hour TSP Monitoring Results                          |      |         | Appendix    | F       |          |

## 24-hr TSP Concentration Levels

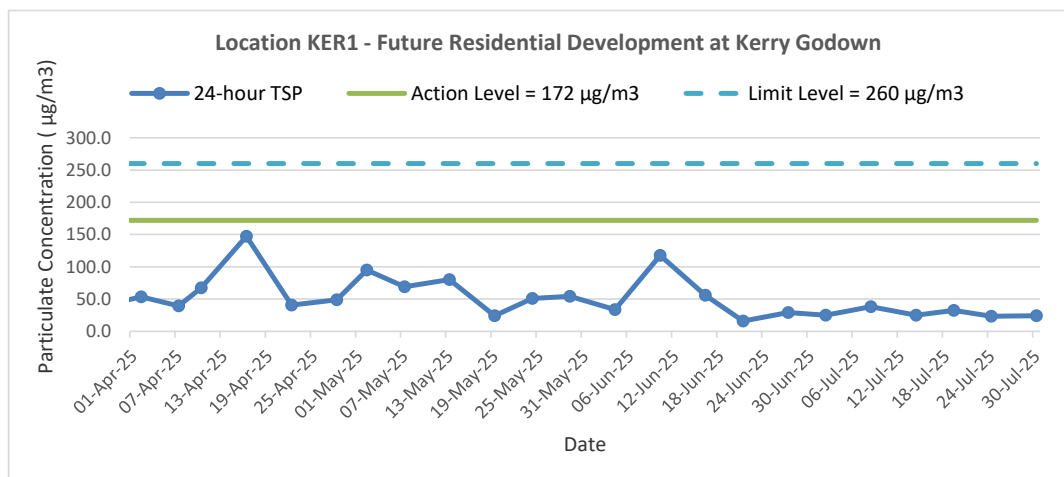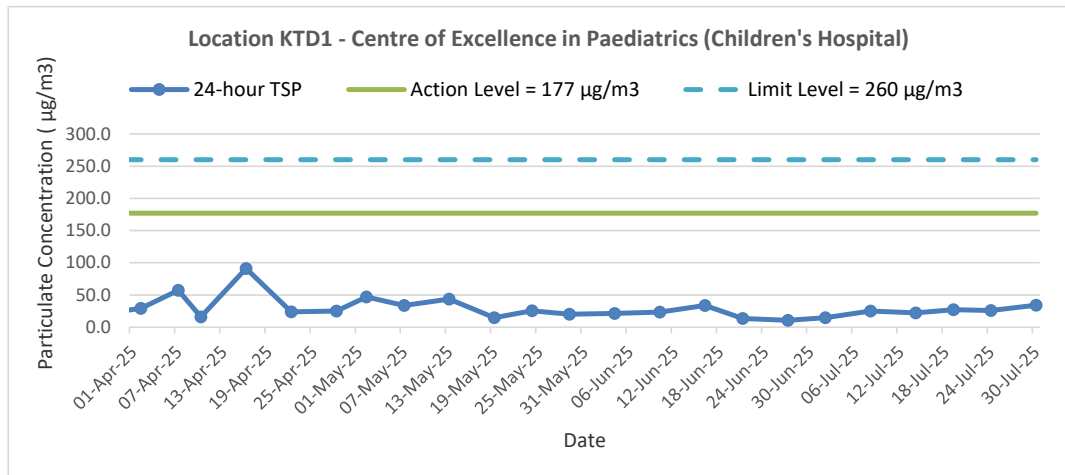

|       |   |      |         |             |         |          |
|-------|---|------|---------|-------------|---------|----------|
| Title | Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron | Date | Jul -25 | Project No. | MA20003 | CINOTECH |
|       | Graphical Presentation of 24-hour TSP Monitoring Results                          |      |         | Appendix    | F       |          |

## 24-hr TSP Concentration Levels

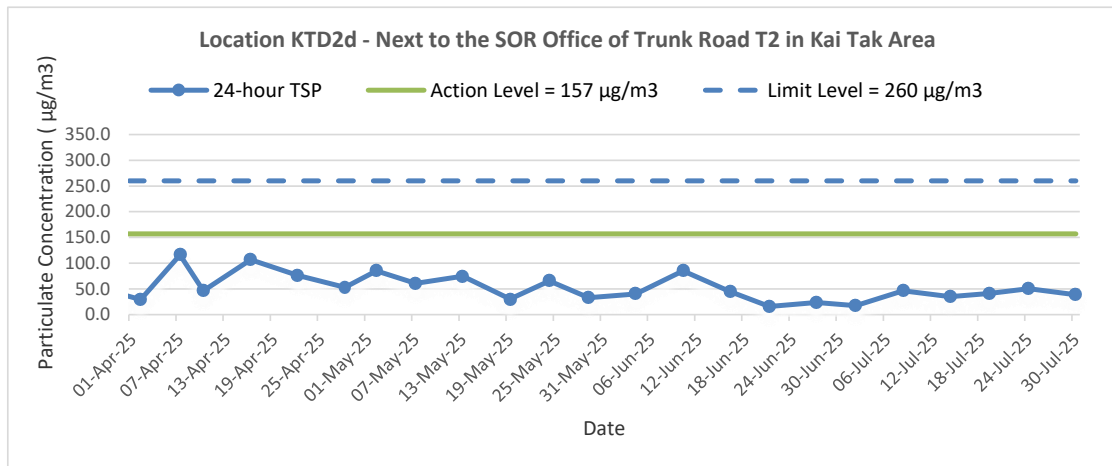

|       |   |      |         |             |         |          |
|-------|---|------|---------|-------------|---------|----------|
| Title | Trunk Road T2 and Infrastructure Works for Developments at the Former South Apron | Date | Jul -25 | Project No. | MA20003 | CINOTECH |
|       | Graphical Presentation of 24-hour TSP Monitoring Results                          |      |         | Appendix    | F       |          |

---

---

**APPENDIX G  
COPIES OF CALIBRATION  
CERTIFICATES FOR NOISE  
MONITORING**

---

---

## **High Precision Chemical Testing Ltd.**

Rm 1904, Technology Park

18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>



Report No. : 00964

Issue Date : 30 Dec 2024

Application No. : HP00820

### **Certificate of Calibration**

Applicant : Cinotech Consultants Limited  
RM 1710, Technology Park,  
18 On Lai Street,  
Shatin, N.T., Hong Kong

Sample Description : Submitted equipment stated to be Sound Level Calibrator.

Equipment No.: : N-16-01

Manufacturer: : Hangzhou Aihua Instruments Co., Ltd.

Other information :

|            |          |
|------------|----------|
| Model No.  | AWA6021A |
| Serial No. | 1023253  |

Date Received : 27 Dec 2024

Test Period : 30 Dec 2024 to 30 Dec 2024

Test Requested : Performance checking for Sound Level Calibrator

Test Method : The Sound Level Meter and Calibrator has been calibrated in accordance with the documented procedures and using standard and instrument which are recommended by the manufacturer, or equivalent.

Test conditions : Room Temperature: 22-25 degree Celsius  
Relative Humidity: 35-70%

Test Result : Refer to the test result(s) on page 2.

Remark : 1. Information of the sample description provided by the Applicant.  
2. The result(s) relate only to the items tested or calibrated.

***For and on behalf of  
HIGH PRECISION CHEMICAL TESTING LIMITED***

Lee Wai Kit  
Laboratory Manager

## **High Precision Chemical Testing Ltd.**

Rm 1904, Technology Park

18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>



Report No. : 00964

Issue Date : 30 Dec 2024

Application No. : HP00820

### **Certificate of Calibration**

Measuring  
equipment

|               |                  |
|---------------|------------------|
| Description   | Sound Calibrator |
| Manufacturer  | Brüel & Kjær     |
| Model No.     | TYPE 4231        |
| Serial No.    | 2326353          |
| Equipment No. | N-02-01          |

|                |                 |
|----------------|-----------------|
| Description    | Sound Meter     |
| Manufacturer   | BSWA Technology |
| Model No.      | BSWA 308        |
| Serial No.     | 570183          |
| Microphone No. | 570605          |
| Equipment No.  | N-12-01         |

Test Result :

| Reference value, dB | Indication value, dB | Deviation, dB | Allowed deviation, dB |
|---------------------|----------------------|---------------|-----------------------|
| 94.0                | 94.3                 | + 0.3         | ± 0.3                 |
| 114.0               | 114.3                | + 0.3         | ± 0.5                 |

- Note** : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.
2. The indication value was obtained from the average of ten replicated measurement.

- End of report -

**High Precision Chemical Testing Ltd.**

Rm 1904, Technology Park

18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>

Report No. : 01015

Issue Date : 04 Feb 2025

Application No. : HP00868

**Certificate of Calibration**

Applicant : Cinotech Consultants Limited  
RM 1710, Technology Park,  
18 On Lai Street,  
Shatin, N.T., Hong Kong

Sample Description : Submitted equipment stated to be Sound Level Calibrator.

Equipment No.: : N-16-02

Manufacturer: : Hangzhou Aihua Instruments Co., Ltd.

Other information :

|            |          |
|------------|----------|
| Model No.  | AWA6021A |
| Serial No. | 1023064  |

Date Received : 28 Jan 2025

Test Period : 03 Feb 2025 to 04 Feb 2025

Test Requested : Performance checking for Sound Level Calibrator

Test Method : The Sound Level Meter and Calibrator has been calibrated in accordance with the documented procedures and using standard and instrument which are recommended by the manufacturer, or equivalent.

Test conditions : Room Temperature: 22-25 degree Celsius  
Relative Humidity: 35-70%

Test Result : Refer to the test result(s) on page 2.

Remark : 1. Information of the sample description provided by the Applicant.  
2. The result(s) relate only to the items tested or calibrated.

***For and on behalf of***  
**HIGH PRECISION CHEMICAL TESTING LIMITED**

Lee Wai Kit  
Laboratory Manager



**High Precision Chemical Testing Ltd.**

Rm 1904, Technology Park

18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>

Report No. : 01015

Issue Date : 04 Feb 2025

Application No. : HP00868

**Certificate of Calibration**Measuring  
equipment

|               |                  |
|---------------|------------------|
| Description   | Sound Calibrator |
| Manufacturer  | Brüel & Kjær     |
| Model No.     | TYPE 4231        |
| Serial No.    | 2326353          |
| Equipment No. | N-02-01          |

|                |             |
|----------------|-------------|
| Description    | Sound Meter |
| Manufacturer   | SVANTEK     |
| Model No.      | SVAN 977    |
| Serial No.     | 92677       |
| Microphone No. | 10352       |
| Equipment No.  | N-14-01     |

Test Result :

| Reference value, dB | Indication value, dB | Deviation, dB | Allowed deviation, dB |
|---------------------|----------------------|---------------|-----------------------|
| 94.0                | 94.2                 | + 0.2         | ± 0.3                 |
| 114.0               | 114.3                | + 0.3         | ± 0.5                 |

- Note** : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.
2. The indication value was obtained from the average of ten replicated measurement.

- End of report -

## **High Precision Chemical Testing Ltd.**

Rm 1904, Technology Park

18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>



Report No. : 00870

Issue Date : 14 Oct 2024

Application No. : HP00731

### **Certificate of Calibration**

Applicant : Cinotech Consultants Limited  
RM 1710, Technology Park,  
18 On Lai Street,  
Shatin, N.T., Hong Kong

Sample Description : Submitted equipment stated to be Integrating Sound Level Meter.

Equipment No.: : N-08-12

Manufacturer: : SVANTEK

Other information :

|                |          |
|----------------|----------|
| Model No.      | SVAN 957 |
| Serial No.     | 23851    |
| Microphone No. | 22391    |

Date Received : 07 Oct 2024

Test Period : 09 Oct 2024 to 09 Oct 2024

Test Requested : Performance checking for Sound Level Meter

Test Method : The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard and instrument which are recommended by the manufacturer, or equivalent.

Test conditions : Room Temperature: 22-25 degree Celsius  
Relative Humidity: 35-70%

Test Result : Refer to the test result(s) on page 2.

Remark : 1. Information of the sample description provided by the Applicant.  
2. The result(s) relate only to the items tested or calibrated.

***For and on behalf of  
HIGH PRECISION CHEMICAL TESTING LIMITED***

Lee Wai Kit  
Laboratory Manager

## **High Precision Chemical Testing Ltd.**

Rm 1904, Technology Park

18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>



Report No. : 00870

Issue Date : 14 Oct 2024

Application No. : HP00731

### **Certificate of Calibration**

Measuring  
equipment

|               |                  |
|---------------|------------------|
| Description   | Sound Calibrator |
| Manufacturer  | Brüel & Kjær     |
| Model No.     | TYPE 4231        |
| Serial No.    | 2326353          |
| Equipment No. | N-02-01          |

Test Result :

| Reference value, dB | Indication value, dB | Deviation, dB | Allowed deviation, dB |
|---------------------|----------------------|---------------|-----------------------|
| 94.0                | 94.0                 | ± 0.0         | ± 1.5                 |
| 114.0               | 114.2                | + 0.2         | ± 1.5                 |

**Note** : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.  
2. The indication value was obtained from the average of ten replicated measurement.

- End of report -

## **High Precision Chemical Testing Ltd.**

Rm 1904, Technology Park

18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>



Report No. : 00871

Issue Date : 14 Oct 2024

Application No. : HP00732

### **Certificate of Calibration**

Applicant : Cinotech Consultants Limited  
RM 1710, Technology Park,  
18 On Lai Street,  
Shatin, N.T., Hong Kong

Sample Description : Submitted equipment stated to be Integrating Sound Level Meter.

Equipment No.: : N-12-02

Manufacturer: : BSWA Technology

Other information :

|                |          |
|----------------|----------|
| Model No.      | BSWA 308 |
| Serial No.     | 570187   |
| Microphone No. | 590079   |

Date Received : 07 Oct 2024

Test Period : 09 Oct 2024 to 09 Oct 2024

Test Requested : Performance checking for Sound Level Meter

Test Method : The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard and instrument which are recommended by the manufacturer, or equivalent.

Test conditions : Room Temperature: 22-25 degree Celsius  
Relative Humidity: 35-70%

Test Result : Refer to the test result(s) on page 2.

Remark : 1. Information of the sample description provided by the Applicant.  
2. The result(s) relate only to the items tested or calibrated.

***For and on behalf of***  
**HIGH PRECISION CHEMICAL TESTING LIMITED**

Lee Wai Kit  
Laboratory Manager

**High Precision Chemical Testing Ltd.**

Rm 1904, Technology Park

18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>

Report No. : 00871

Issue Date : 14 Oct 2024

Application No. : HP00732

**Certificate of Calibration**Measuring  
equipment

|               |                  |
|---------------|------------------|
| Description   | Sound Calibrator |
| Manufacturer  | Brüel & Kjær     |
| Model No.     | TYPE 4231        |
| Serial No.    | 2326353          |
| Equipment No. | N-02-01          |

Test Result :

| Reference value, dB | Indication value, dB | Deviation, dB | Allowed deviation, dB |
|---------------------|----------------------|---------------|-----------------------|
| 94.0                | 93.9                 | - 0.1         | ± 1.5                 |
| 114.0               | 113.7                | - 0.3         | ± 1.5                 |

- Note** : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.
2. The indication value was obtained from the average of ten replicated measurement.

- End of report -

**High Precision Chemical Testing Ltd.**

Rm 1904, Technology Park

18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>

Report No. : 01076

Issue Date : 19 Mar 2025

Application No. : HP00914

**Certificate of Calibration**

Applicant : Cinotech Consultants Limited  
RM 1710, Technology Park,  
18 On Lai Street,  
Shatin, N.T., Hong Kong

Sample Description : Submitted equipment stated to be Integrating Sound Level Meter.

Equipment No.: : N-12-06

Manufacturer: : BSWA Technology

Other information :

|                |          |
|----------------|----------|
| Model No.      | BSWA 308 |
| Serial No.     | 580156   |
| Microphone No. | 580804   |

Date Received : 17 Mar 2025

Test Period : 18 Mar 2025 to 18 Mar 2025

Test Requested : Performance checking for Sound Level Meter

Test Method : The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard and instrument which are recommended by the manufacturer, or equivalent.

Test conditions : Room Temperature: 22-25 degree Celsius  
Relative Humidity: 35-70%

Test Result : Refer to the test result(s) on page 2.

Remark : 1. Information of the sample description provided by the Applicant.  
2. The result(s) relate only to the items tested or calibrated.

***For and on behalf of***  
**HIGH PRECISION CHEMICAL TESTING LIMITED**

Lee Wai Kit  
Laboratory Manager

**High Precision Chemical Testing Ltd.**

Rm 1904, Technology Park

18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>

Report No. : 01076

Issue Date : 19 Mar 2025

Application No. : HP00914

**Certificate of Calibration**Measuring  
equipment

|               |                  |
|---------------|------------------|
| Description   | Sound Calibrator |
| Manufacturer  | Brüel & Kjær     |
| Model No.     | TYPE 4231        |
| Serial No.    | 2326353          |
| Equipment No. | N-02-01          |

Test Result :

| Reference value, dB | Indication value, dB | Deviation, dB | Allowed deviation, dB |
|---------------------|----------------------|---------------|-----------------------|
| 94.0                | 93.9                 | - 0.1         | ± 1.5                 |
| 114.0               | 114.1                | + 0.1         | ± 1.5                 |

- Note** : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.
2. The indication value was obtained from the average of ten replicated measurement.

- End of report -

## **High Precision Chemical Testing Ltd.**

Rm 1904, Technology Park

18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>



Report No. : 01013

Issue Date : 05 Feb 2025

Application No. : HP00855

### **Certificate of Calibration**

Applicant : Cinotech Consultants Limited  
RM 1710, Technology Park,  
18 On Lai Street,  
Shatin, N.T., Hong Kong

Sample Description : Submitted equipment stated to be Integrating Sound Level Meter.

Equipment No.: : N-12-07

Manufacturer: : BSWA Technology

Other information :

|                |          |
|----------------|----------|
| Model No.      | BSWA 308 |
| Serial No.     | 620091   |
| Microphone No. | 620230   |

Date Received : 03 Feb 2025

Test Period : 04 Feb 2025 to 04 Feb 2025

Test Requested : Performance checking for Sound Level Meter

Test Method : The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard and instrument which are recommended by the manufacturer, or equivalent.

Test conditions : Room Temperature: 22-25 degree Celsius  
Relative Humidity: 35-70%

Test Result : Refer to the test result(s) on page 2.

Remark : 1. Information of the sample description provided by the Applicant.  
2. The result(s) relate only to the items tested or calibrated.

***For and on behalf of  
HIGH PRECISION CHEMICAL TESTING LIMITED***

Lee Wai Kit  
Laboratory Manager



**High Precision Chemical Testing Ltd.**

Rm 1904, Technology Park

18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: <https://www.hpct.com.hk>

Report No. : 01013

Issue Date : 05 Feb 2025

Application No. : HP00855

**Certificate of Calibration**Measuring  
equipment

|               |                  |
|---------------|------------------|
| Description   | Sound Calibrator |
| Manufacturer  | Brüel & Kjær     |
| Model No.     | TYPE 4231        |
| Serial No.    | 2326353          |
| Equipment No. | N-02-01          |

Test Result :

| Reference value, dB | Indication value, dB | Deviation, dB | Allowed deviation, dB |
|---------------------|----------------------|---------------|-----------------------|
| 94.0                | 93.9                 | - 0.1         | ± 1.5                 |
| 114.0               | 114.1                | + 0.1         | ± 1.5                 |

- Note** : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.
2. The indication value was obtained from the average of ten replicated measurement.

- End of report -

---

---

**APPENDIX H**  
**NOISE MONITORING RESULTS AND**  
**GRAPHICAL PRESENTATIONS**

---

---

## Appendix H - Noise Monitoring Results

(0700-1900 hrs on Normal Weekdays)

| Location CKL1 - Flat 121 Cha Kwo Ling Village |       |         |                       |                 |                 |                 |                          |
|---|-------|---------|-----------------------|-----------------|-----------------|-----------------|--------------------------|
| Date  | Time  | Weather | Unit: dB (A) (30-min) |                 |                 |                 |                          |
|   |       |         | Measured Noise Level  |                 |                 | Baseline Level  | Construction Noise Level |
|   |       |         | L <sub>eq</sub>       | L <sub>10</sub> | L <sub>90</sub> | L <sub>eq</sub> | L <sub>eq</sub>          |
| 4-Jul-25                                      | 11:00 | Sunny   | 73.7                  | 77.4            | 63.7            | 72.4            | 68                       |
| 9-Jul-25                                      | 11:00 | Fine    | 74.1                  | 77.8            | 62.3            | 72.4            | 69                       |
| 15-Jul-25                                     | 13:15 | Fine    | 76.4                  | 80.3            | 64.1            | 72.4            | 74                       |
| 21-Jul-25                                     | 10:42 | Cloudy  | 73.3                  | 76.7            | 63.0            | 72.4            | 66                       |
| 31-Jul-25                                     | 13:43 | Fine    | 72.9                  | 76.7            | 62.3            | 72.4            | 63                       |



| Location CKL2 - Flat 103 Cha Kwo Ling Village |       |         |                       |                 |                 |                 |                          |
|---|-------|---------|-----------------------|-----------------|-----------------|-----------------|--------------------------|
| Date  | Time  | Weather | Unit: dB (A) (30-min) |                 |                 |                 |                          |
|   |       |         | Measured Noise Level  |                 |                 | Baseline Level  | Construction Noise Level |
|   |       |         | L <sub>eq</sub>       | L <sub>10</sub> | L <sub>90</sub> | L <sub>eq</sub> | L <sub>eq</sub>          |
| 4-Jul-25                                      | 11:30 | Sunny   | 74.3                  | 77.7            | 60.3            | 71.4            | 71                       |
| 9-Jul-25                                      | 11:30 | Fine    | 73.6                  | 77.2            | 60.4            | 71.4            | 70                       |
| 15-Jul-25                                     | 14:00 | Fine    | 74.9                  | 77.7            | 62.6            | 71.4            | 72                       |
| 21-Jul-25                                     | 11:42 | Cloudy  | 75.2                  | 78.9            | 62.1            | 71.4            | 73                       |
| 31-Jul-25                                     | 14:13 | Fine    | 75.6                  | 79.3            | 64.3            | 71.4            | 74                       |

| Location KTD1 - Centre of Excellence in Paediatrics (Rooftop of Children's Hospital) |       |         |                       |                 |                 |                 |                               |
|--|-------|---------|-----------------------|-----------------|-----------------|-----------------|-------------------------------|
| Date   | Time  | Weather | Unit: dB (A) (30-min) |                 |                 |                 |                               |
|  |       |         | Measured Noise Level  |                 |                 | Baseline Level  | Construction Noise Level      |
|  |       |         | L <sub>eq</sub>       | L <sub>10</sub> | L <sub>90</sub> | L <sub>eq</sub> | L <sub>eq</sub>               |
| 4-Jul-25   | 14:00 | Sunny   | 65.8                  | 66.9            | 64.6            | 78.0            | 65.8 Measured $\leq$ Baseline |
| 9-Jul-25   | 14:00 | Fine    | 67.9                  | 69.1            | 66.4            | 78.0            | 67.9 Measured $\leq$ Baseline |
| 15-Jul-25  | 17:00 | Fine    | 68.9                  | 70.3            | 63.8            | 78.0            | 68.9 Measured $\leq$ Baseline |
| 21-Jul-25  | 13:45 | Cloudy  | 73.9                  | 75.7            | 71.3            | 78.0            | 73.9 Measured $\leq$ Baseline |
| 31-Jul-25  | 11:28 | Sunny   | 68.5                  | 69.8            | 67.0            | 78.0            | 68.5 Measured $\leq$ Baseline |

| Location KER1 - Future Residential Development at Kerry Godown |       |         |                       |                 |                 |                 |                          |
|--|-------|---------|-----------------------|-----------------|-----------------|-----------------|--------------------------|
| Date   | Time  | Weather | Unit: dB (A) (30-min) |                 |                 |                 |                          |
|  |       |         | Measured Noise Level  |                 |                 | Baseline Level  | Construction Noise Level |
|  |       |         | L <sub>eq</sub>       | L <sub>10</sub> | L <sub>90</sub> | L <sub>eq</sub> | L <sub>eq</sub>          |
| 4-Jul-25   | 14:30 | Sunny   | 71.6                  | 74.7            | 66.4            | 65.0            | 71                       |
| 9-Jul-25   | 13:00 | Fine    | 73.6                  | 76.7            | 62.6            | 65.0            | 73                       |
| 15-Jul-25  | 9:00  | Fine    | 74.4                  | 75.4            | 72.7            | 65.0            | 74                       |
| 21-Jul-25  | 12:58 | Cloudy  | 71.0                  | 74.3            | 65.3            | 65.0            | 70                       |
| 31-Jul-25  | 12:55 | Sunny   | 69.9                  | 72.2            | 66.3            | 65.0            | 68                       |


| Location KTD2d - Next to the SOR Office of Trunk Road T2 in Kai Tak Area |       |         |                       |                 |                 |                 |                             |
|--|-------|---------|-----------------------|-----------------|-----------------|-----------------|-----------------------------|
| Date   | Time  | Weather | Unit: dB (A) (30-min) |                 |                 |                 |                             |
|  |       |         | Measured Noise Level  |                 |                 | Baseline Level  | Construction Noise Level    |
|  |       |         | L <sub>eq</sub>       | L <sub>10</sub> | L <sub>90</sub> | L <sub>eq</sub> | L <sub>eq</sub>             |
| 4-Jul-25   | 15:00 | Sunny   | 60.0                  | 62.1            | 57.7            | 64.0            | 60 Measured $\leq$ Baseline |
| 9-Jul-25   | 15:00 | Fine    | 62.0                  | 62.2            | 58.8            | 64.0            | 62 Measured $\leq$ Baseline |
| 15-Jul-25  | 13:30 | Fine    | 58.2                  | 60.5            | 54.1            | 64.0            | 58 Measured $\leq$ Baseline |
| 21-Jul-25  | 15:00 | Cloudy  | 69.4                  | 72.1            | 58.1            | 64.0            | 68                          |
| 31-Jul-25  | 10:27 | Sunny   | 61.3                  | 63.2            | 57.4            | 64.0            | 61 Measured $\leq$ Baseline |

## Noise Levels

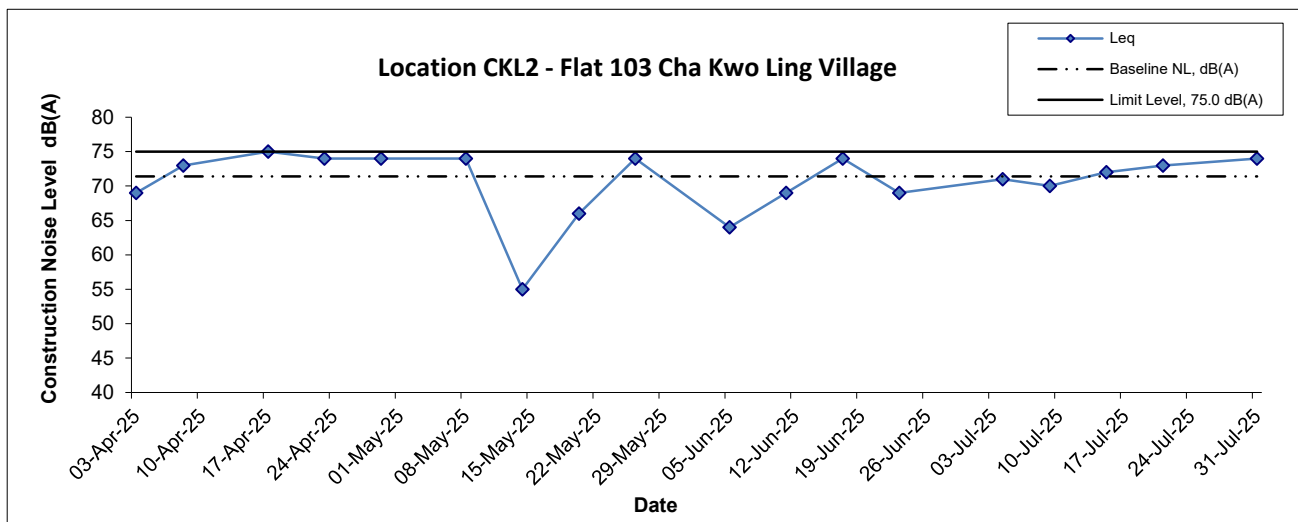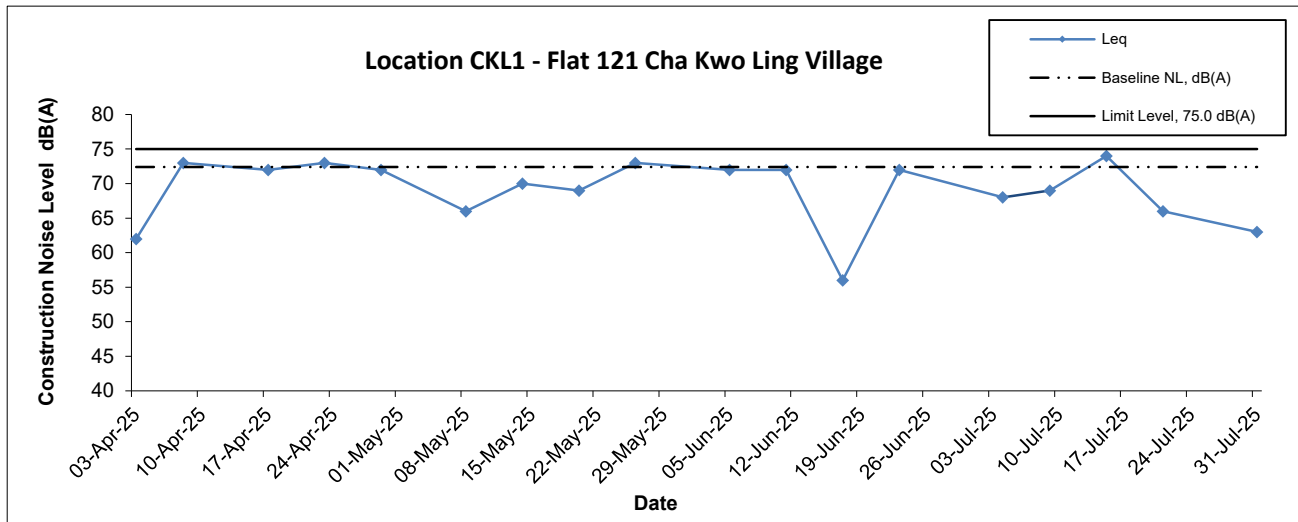

|   |                       |                            |  |
|---|-----------------------|----------------------------|--|
| <b>Title</b><br>Kai Tak Development – Trunk Road T2 and Infrastructure Works at the Former South Apron<br><br>Graphical Presentation of Construction Noise Monitoring Results | <b>Date</b><br>Jul 25 | <b>Project No.</b> MA20003 |  |
|   |                       | <b>Appendix</b> H          |  |

## Noise Levels

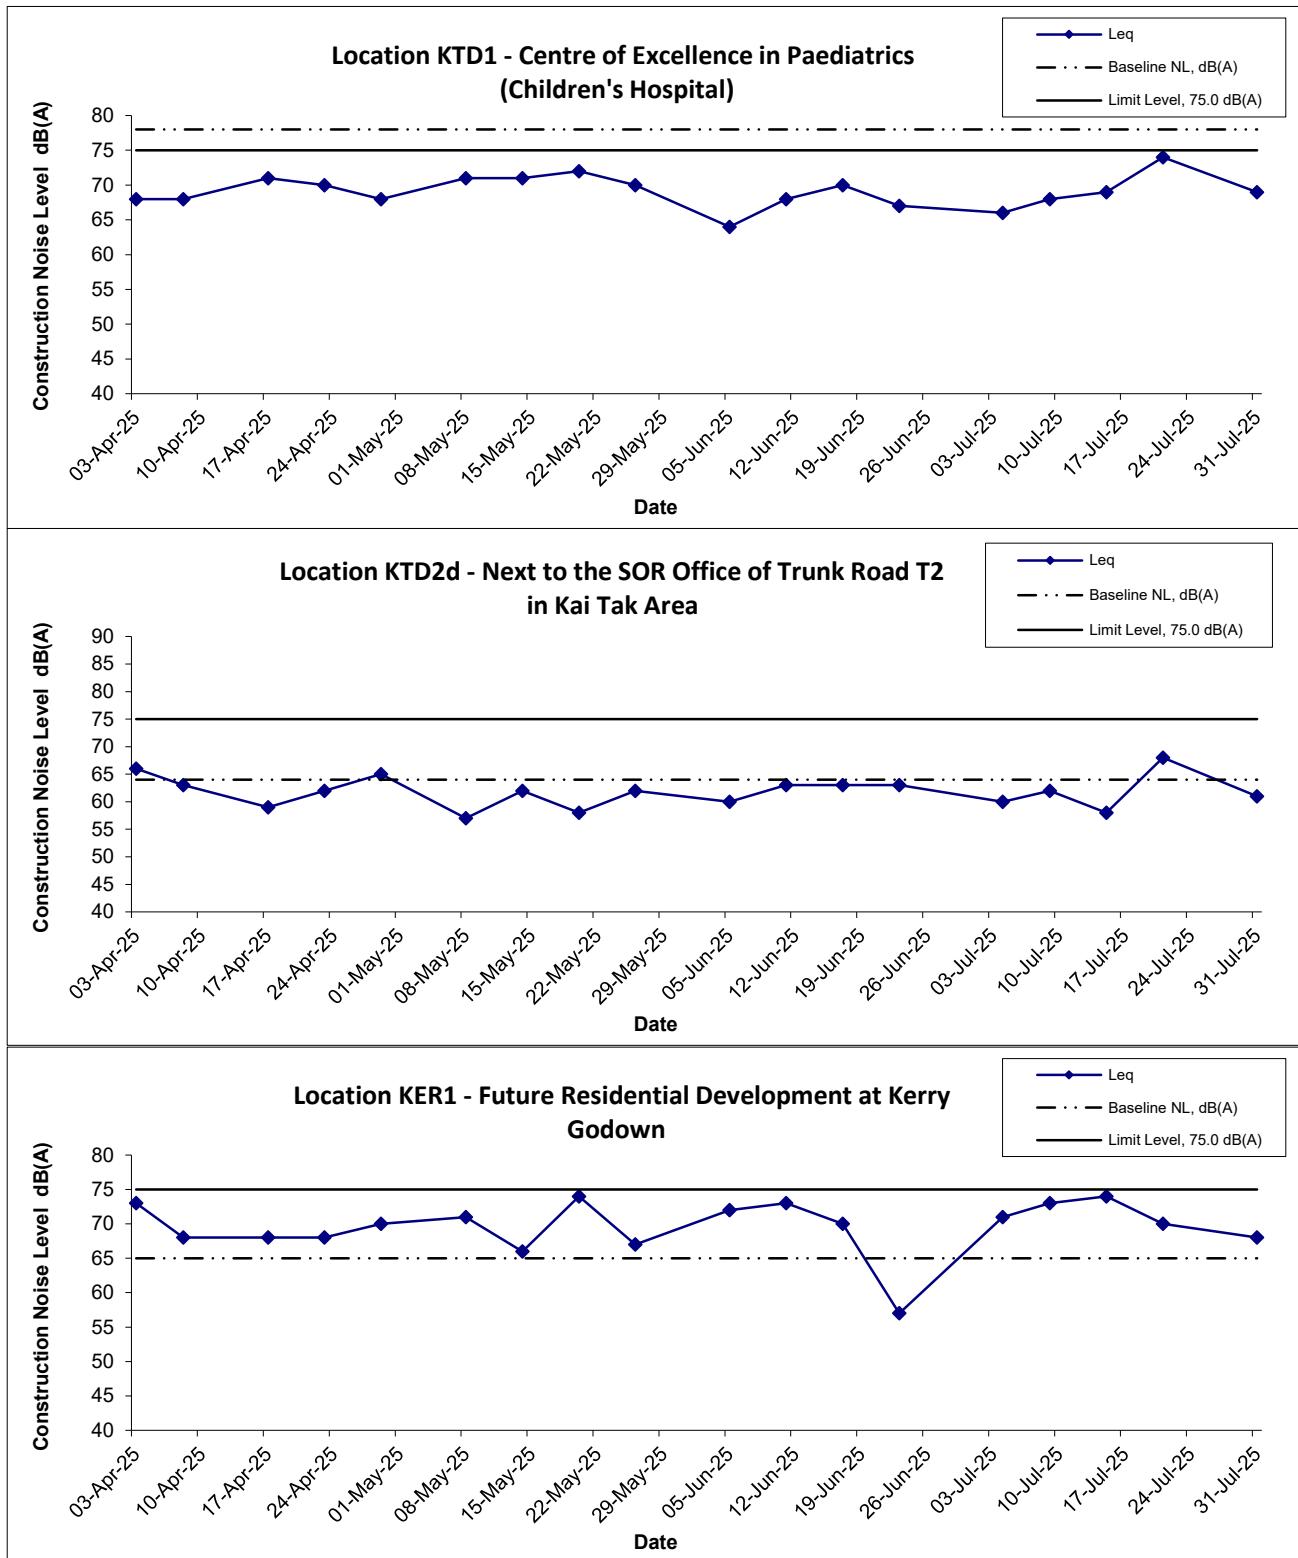

|   |                           |                               |  |
|---|---------------------------|-------------------------------|--|
| <b>Title</b><br>Kai Tak Development – Trunk Road T2 and Infrastructure Works at the Former South Apron<br><br>Graphical Presentation of Construction Noise Monitoring Results | <b>Date</b><br><br>Jul 25 | <b>Project</b><br>No. MA20003 |  |
|   |                           | <b>Appendix</b><br>H          |  |
|   |                           |                               |  |

---

---

**APPENDIX I**  
**SITE AUDIT SUMMARY**

---

---



**Weekly Site Inspection Record Summary**

**Inspection Information**

|                            |                         |
|----------------------------|-------------------------|
| Checklist Reference Number | 250703                  |
| Date                       | 03 July 2025 (Thursday) |
| Time                       | 09:30 – 16:30           |

| Ref. No. | Non-Compliance  | Related Item No. |
|----------|-----------------|------------------|
| -        | None identified | -                |

| Ref. No. | Remarks/Observations  | Related Item No. |
|----------|---|------------------|
|          | <p><b>B. Water Quality</b></p> <ul style="list-style-type: none"><li>• No environmental deficiency was identified during site inspection.</li></ul> <p><b>C. Air Quality</b></p> <ul style="list-style-type: none"><li>• No environmental deficiency was identified during site inspection.</li></ul> <p><b>D. Construction Noise Impact</b></p> <ul style="list-style-type: none"><li>• No environmental deficiency was identified during site inspection.</li></ul> <p><b>E. Waste/Chemical Management</b></p> <ul style="list-style-type: none"><li>• No environmental deficiency was identified during site inspection.</li></ul> <p><b>F. Visual and Landscape</b></p> <ul style="list-style-type: none"><li>• No environmental deficiency was identified during site inspection.</li></ul> <p><b>G. Permits/Licences</b></p> <ul style="list-style-type: none"><li>• No environmental deficiency was identified during site inspection.</li></ul> <p><b>H. Marine Ecology</b></p> <ul style="list-style-type: none"><li>• No environmental deficiency was identified during site inspection.</li></ul> <p><b>I. Others</b></p> <ul style="list-style-type: none"><li>• Follow up on the previous session (Ref No.:250626), all the items have been rectified.</li></ul> |                  |



|             | Name          | Signature  | Date        |
|-------------|---------------|--|-------------|
| Recorded by | William Yeung |   | 03 Jul 2025 |
| Checked by  | Karina Chan   |  | 07 Jul 2025 |

**Weekly Site Inspection Record Summary****Inspection Information**

|                            |                         |
|----------------------------|-------------------------|
| Checklist Reference Number | 250710                  |
| Date                       | 10 July 2025 (Thursday) |
| Time                       | 09:30 – 16:30           |

| Ref. No. | Non-Compliance  | Related Item No. |
|----------|-----------------|------------------|
| -        | None identified | -                |

| Ref. No. | Remarks/Observations   | Related Item No. |
|----------|--|------------------|
|          | <p><b>B. Water Quality</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>C. Air Quality</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>D. Construction Noise Impact</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>E. Waste/Chemical Management</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>F. Visual and Landscape</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>G. Permits/Licences</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>H. Marine Ecology</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>I. Others</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified in previous session (Ref No.: 250703).</li> </ul> |                  |

|             | Name          | Signature  | Date        |
|-------------|---------------|--|-------------|
| Recorded by | William Yeung |   | 10 Jul 2025 |
| Checked by  | Karina Chan   |  | 14 Jul 2025 |





**Weekly Site Inspection Record Summary****Inspection Information**

|                            |                         |
|----------------------------|-------------------------|
| Checklist Reference Number | 250717                  |
| Date                       | 17 July 2025 (Thursday) |
| Time                       | 09:30 – 16:30           |

| Ref. No. | Non-Compliance  | Related Item No. |
|----------|-----------------|------------------|
| -        | None identified | -                |

| Ref. No. | Remarks/Observations   | Related Item No. |
|----------|--|------------------|
|          | <p><b>B. Water Quality</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>C. Air Quality</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>D. Construction Noise Impact</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>E. Waste/Chemical Management</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>F. Visual and Landscape</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>G. Permits/Licences</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>H. Marine Ecology</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>I. Others</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified in previous session (Ref No.: 250710).</li> </ul> |                  |

|             | Name          | Signature  | Date        |
|-------------|---------------|--|-------------|
| Recorded by | William Yeung |   | 17 Jul 2025 |
| Checked by  | Karina Chan   |  | 21 Jul 2025 |



Weekly Site Inspection Record Summary

Inspection Information

|                            |                         |
|----------------------------|-------------------------|
| Checklist Reference Number | 250724                  |
| Date                       | 24 July 2025 (Thursday) |
| Time                       | 09:30 – 16:30           |

| Ref. No. | Non-Compliance  | Related Item No. |
|----------|-----------------|------------------|
| -        | None identified | -                |

| Ref. No. | Remarks/Observations   | Related Item No. |
|----------|--|------------------|
|          | <p><b>B. Water Quality</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>C. Air Quality</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>D. Construction Noise Impact</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>E. Waste/Chemical Management</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>F. Visual and Landscape</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>G. Permits/Licences</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>H. Marine Ecology</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>I. Others</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified in previous session (Ref No.: 250717).</li> </ul> |                  |



|             | Name          | Signature  | Date        |
|-------------|---------------|--|-------------|
| Recorded by | William Yeung |   | 24 Jul 2025 |
| Checked by  | Karina Chan   |  | 28 Jul 2025 |

**Weekly Site Inspection Record Summary****Inspection Information**

|                            |                         |
|----------------------------|-------------------------|
| Checklist Reference Number | 250731                  |
| Date                       | 31 July 2025 (Thursday) |
| Time                       | 09:30 – 16:30           |

| Ref. No. | Non-Compliance  | Related Item No. |
|----------|-----------------|------------------|
| -        | None identified | -                |

| Ref. No.        | Remarks/Observations  | Related Item No. |
|-----------------|---|------------------|
| 250731-EP451-R1 | <p><b>B. Water Quality</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>C. Air Quality</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>D. Construction Noise Impact</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>E. Waste/Chemical Management</b></p> <ul style="list-style-type: none"> <li>Drip tray should be provided to the chemical container to avoid potential chemical leakage.</li> </ul> <p><b>F. Visual and Landscape</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>G. Permits/Licences</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>H. Marine Ecology</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>I. Others</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified in previous session (Ref No.: 250724).</li> </ul> | E09              |

|             | Name          | Signature  | Date        |
|-------------|---------------|--|-------------|
| Recorded by | William Yeung |   | 31 Jul 2025 |
| Checked by  | Karina Chan   |  | 04 Aug 2025 |

**Contract No. ED/2020/03**

**Environmental Team for Trunk Road T2 – Traffic Control and Surveillance System (TCSS) and Associated Works**



**Site Inspection Record Summary**

**Inspection Information**

|                            |                         |
|----------------------------|-------------------------|
| Checklist Reference Number | 250703                  |
| Date                       | 03 July 2025 (Thursday) |
| Time                       | 09:30 – 12:30           |

| Ref. No. | Non-Compliance  | Related Item No. |
|----------|-----------------|------------------|
| -        | None identified | -                |

| Ref. No. | Remarks/Observations  | Related Item No. |
|----------|---|------------------|
|          | <p><b>B. Water Quality</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>C. Air Quality</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>D. Construction Noise Impact</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>E. Waste/Chemical Management</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>F. Visual and Landscape</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>G. Permits/Licences</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection</li></ul> <p><b>I. Others</b></p> <ul style="list-style-type: none"><li>Follow up on the previous session (Ref No.:250626), no major environmental deficiency was identified during site inspection.</li></ul> |                  |

|             | Name          | Signature  | Date        |
|-------------|---------------|--|-------------|
| Recorded by | William Yeung |   | 03 Jul 2025 |
| Checked by  | Karina Chan   |  | 07 Jul 2025 |

**Contract No. ED/2020/03**

**Environmental Team for Trunk Road T2 – Traffic Control and Surveillance System (TCSS) and Associated Works**



**Site Inspection Record Summary**

**Inspection Information**

|                            |                       |
|----------------------------|-----------------------|
| Checklist Reference Number | 250711                |
| Date                       | 11 July 2025 (Friday) |
| Time                       | 09:30 – 12:30         |

| Ref. No. | Non-Compliance  | Related Item No. |
|----------|-----------------|------------------|
| -        | None identified | -                |

| Ref. No. | Remarks/Observations  | Related Item No. |
|----------|---|------------------|
|          | <p><b>B. Water Quality</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>C. Air Quality</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>D. Construction Noise Impact</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>E. Waste/Chemical Management</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>F. Visual and Landscape</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>G. Permits/Licences</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection</li></ul> <p><b>I. Others</b></p> <ul style="list-style-type: none"><li>Follow up on the previous session (Ref No.:250703), no major environmental deficiency was identified during site inspection.</li></ul> |                  |

|             | Name          | Signature  | Date        |
|-------------|---------------|--|-------------|
| Recorded by | William Yeung |   | 11 Jul 2025 |
| Checked by  | Karina Chan   |  | 14 Jul 2025 |

**Contract No. ED/2020/03**

**Environmental Team for Trunk Road T2 – Traffic Control and Surveillance System (TCSS) and Associated Works**



**Site Inspection Record Summary**

**Inspection Information**

|                            |                         |
|----------------------------|-------------------------|
| Checklist Reference Number | 250717                  |
| Date                       | 17 July 2025 (Thursday) |
| Time                       | 09:30 – 12:30           |

| Ref. No. | Non-Compliance  | Related Item No. |
|----------|-----------------|------------------|
| -        | None identified | -                |

| Ref. No. | Remarks/Observations  | Related Item No. |
|----------|---|------------------|
|          | <p><b>B. Water Quality</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>C. Air Quality</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>D. Construction Noise Impact</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>E. Waste/Chemical Management</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>F. Visual and Landscape</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>G. Permits/Licences</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection</li></ul> <p><b>I. Others</b></p> <ul style="list-style-type: none"><li>Follow up on the previous session (Ref No.:250711), no major environmental deficiency was identified during site inspection.</li></ul> |                  |

|             | Name          | Signature  | Date        |
|-------------|---------------|--|-------------|
| Recorded by | William Yeung |   | 17 Jul 2025 |
| Checked by  | Karina Chan   |  | 21 Jul 2025 |

**Environmental Team for Trunk Road T2 – Traffic Control and Surveillance System (TCSS) and Associated Works**



**Site Inspection Record Summary**

**Inspection Information**

|                            |                         |
|----------------------------|-------------------------|
| Checklist Reference Number | 250724                  |
| Date                       | 24 July 2025 (Thursday) |
| Time                       | 09:30 – 12:30           |

| Ref. No. | Non-Compliance  | Related Item No. |
|----------|-----------------|------------------|
| -        | None identified | -                |

| Ref. No. | Remarks/Observations  | Related Item No. |
|----------|---|------------------|
|          | <p><b>B. Water Quality</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>C. Air Quality</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>D. Construction Noise Impact</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>E. Waste/Chemical Management</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>F. Visual and Landscape</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>G. Permits/Licences</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection</li></ul> <p><b>I. Others</b></p> <ul style="list-style-type: none"><li>Follow up on the previous session (Ref No.:250717), no major environmental deficiency was identified during site inspection.</li></ul> |                  |

|             | Name          | Signature  | Date        |
|-------------|---------------|--|-------------|
| Recorded by | William Yeung |   | 24 Jul 2025 |
| Checked by  | Karina Chan   |  | 28 Jul 2025 |

**Environmental Team for Trunk Road T2 – Traffic Control and Surveillance System (TCSS) and Associated Works**



**Site Inspection Record Summary**

**Inspection Information**

|                            |                         |
|----------------------------|-------------------------|
| Checklist Reference Number | 250731                  |
| Date                       | 31 July 2025 (Thursday) |
| Time                       | 09:30 – 12:30           |

| Ref. No. | Non-Compliance  | Related Item No. |
|----------|-----------------|------------------|
| -        | None identified | -                |

| Ref. No. | Remarks/Observations   | Related Item No. |
|----------|--|------------------|
|          | <p><b>B. Water Quality</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>C. Air Quality</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>D. Construction Noise Impact</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>E. Waste/Chemical Management</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>F. Visual and Landscape</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>G. Permits/Licences</b></p> <ul style="list-style-type: none"><li>No environmental deficiency was identified during site inspection.</li></ul> <p><b>I. Others</b></p> <ul style="list-style-type: none"><li>Follow up on the previous session (Ref No.:250724), no major environmental deficiency was identified during site inspection.</li></ul> |                  |

|             | Name          | Signature  | Date        |
|-------------|---------------|--|-------------|
| Recorded by | William Yeung |   | 31 Jul 2025 |
| Checked by  | Karina Chan   |  | 04 Aug 2025 |



---

---

**APPENDIX J**  
**EVENT AND ACTION PLANS**

---

---

## Appendix J - Event Action Plans

**Table J-1 Event/Action Plan for Air Construction Dust Monitoring**

| Event  | Action  |  |  |   |
|--|---|--|--|---|
|  | ET  | IEC  | ER   | Contractor  |
| <b>Action Level</b>                              |   |  |  |   |
| 1. Exceedance for one sample                     | 1. Identify source, investigate the causes of complaint and propose remedial measures;<br>2. Inform IEC and ER;<br>3. Repeat measurement to confirm finding;<br>4. Increase monitoring frequency.   | 1. Check monitoring data submitted by ET;<br>2. Check Contractor's working method.   | 1. Notify Contractor.  | 1. Rectify any unacceptable practice;<br>2. Amend working methods agreed with the ER as appropriate.  |
| 2. Exceedance by two or more consecutive samples | 1. Identify source;<br>2. Inform IEC and ER;<br>3. Advise the ER on the effectiveness of the proposed remedial measures;<br>4. Repeat measurements to confirm findings;<br>5. Increase monitoring frequency to daily;<br>6. Discuss with IEC, ER and Contractor on remedial actions required; | 1. Check monitoring data submitted by ET;<br>2. Check Contractor's working method;<br>3. Discuss with ET, ER and Contractor on possible remedial measures if required;<br>4. Advise the ER on the effectiveness of the proposed remedial measures; | 1. Notify Contractor;<br>2. Ensure remedial measures properly implemented. | 1. Submit proposals for remedial actions to IEC within three working days of notification;<br>2. Implement the agreed proposals;<br>3. Amend proposal if appropriate. |

## Appendix J - Event Action Plans

| Event                                     | Action  |  |  |  |
|---|---|--|--|--|
|   | ET  | IEC  | ER   | Contractor   |
|   | 7. If exceedance continues, arrange meeting with IEC, Contractor and ER;<br>8. If exceedance stops, cease additional monitoring.  |  |  |  |
| <b>Limit level</b>                        |   |  |  |  |
| 1. Exceedance for one sample              | 1. Identify source, investigate the causes of exceedance and propose remedial measures;<br>2. Inform the IEC, ER, and Contractor;<br>3. Repeat measurement to confirm finding;<br>4. Increase monitoring frequency to daily;<br>5. Assess effectiveness of Contractor's remedial actions and keep IEC and ER informed of the results. | 1. Check monitoring data submitted by ET;<br>2. Check Contractor's working method;<br>3. Discuss with ET, ER and Contractor on possible remedial measures;<br>4. Advise the ER and ET on the effectiveness of the proposed remedial measures;<br>5. Supervise implementation of remedial measures. | 1. Confirm receipt of notification of exceedance in writing;<br>2. Notify Contractor;<br>3. Ensure remedial measures properly implemented. | 1. Take immediate action to avoid further exceedance;<br>2. Submit proposals for remedial actions to the ER and copy to the ET and IEC within three working days of notification;<br>3. Implement the agreed proposals;<br>4. Amend proposal if appropriate. |
| 2. Exceedance for two or more consecutive | 1. Notify IEC, ER and Contractor;<br>2. Identify source;  | 1. Discuss amongst ER, ET, and Contractor on the potential remedial actions;   | 1. Confirm receipt of notification of exceedance in writing;   | 1. Take immediate action to avoid further exceedance;<br>2. Submit proposals for remedial  |

## Appendix J - Event Action Plans

| Event   | Action  |   |   |   |
|---------|---|---|---|---|
|         | ET  | IEC   | ER  | Contractor  |
| samples | <ul style="list-style-type: none"> <li>3. Repeat measurement to confirm findings;</li> <li>4. Increase monitoring frequency to daily;</li> <li>5. Carry out analysis of Contractor's working procedures with the ER to determine possible mitigation to be implemented;</li> <li>6. Arrange meeting with IEC and ER to discuss the remedial actions to be taken;</li> <li>7. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results;</li> <li>8. If exceedance stops, cease additional monitoring.</li> </ul> | <ul style="list-style-type: none"> <li>2. Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER and ET accordingly;</li> <li>3. Supervise the implementation of remedial measures.</li> </ul> | <ul style="list-style-type: none"> <li>2. Notify Contractor;</li> <li>3. In consolidation with the IEC and ET, agree with the Contractor on the remedial measures to be implemented;</li> <li>4. Ensure remedial measures properly implemented;</li> <li>5. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated.</li> </ul> | <ul style="list-style-type: none"> <li>actions to ER and copy to the IEC and ET within three working days of notification;</li> <li>3. Implement the agreed proposals;</li> <li>4. Resubmit proposals if problem still not under control;</li> <li>5. Stop the relevant portion of works as determined by the ER until the exceedance is abated.</li> </ul> |

## Appendix J - Event Action Plans

**Table J-2 Event/Action Plan for Construction Noise Monitoring**

| Event        | Action  |  |   |   |
|--------------|---|--|---|---|
|              | ET  | IEC  | ER  | Contractor  |
| Action Level | <ol style="list-style-type: none"> <li>1. Notify IEC, ER and Contractor;</li> <li>2. Carry out investigation;</li> <li>3. Report the results of investigation to the IEC and Contractor;</li> <li>4. Discuss jointly with the ER and formulate remedial measures;</li> <li>5. Increase monitoring frequency to check mitigation effectiveness.</li> </ol> | <ol style="list-style-type: none"> <li>1. Review the monitoring data submitted by the ET;</li> <li>2. Review the construction methods and proposed redial measures by the Contractor, and advise the ET and ER if the proposed remedial measures would be sufficient.</li> </ol> | <ol style="list-style-type: none"> <li>1. Notify Contractor;</li> <li>2. Require Contractor to propose remedial measures for implementation if required.</li> </ol>   | <ol style="list-style-type: none"> <li>1. Submit noise mitigation proposals to the ER and copy to the IEC and ET;</li> <li>2. Implement noise mitigation proposals.</li> </ol>  |
| Limit Level  | <ol style="list-style-type: none"> <li>1. Notify IEC, ER and Contractor;</li> <li>2. Identify source;</li> <li>3. Repeat measurements to confirm findings;</li> <li>4. Carry out analysis of Contractor's working</li> </ol>  | <ol style="list-style-type: none"> <li>1. Discuss amongst ER, ET, and Contractor on the potential remedial actions;</li> <li>2. Review the Contractor's remedial actions whenever necessary to assure their effectiveness and advise the</li> </ol>                              | <ol style="list-style-type: none"> <li>1. Confirm receipt of notification of failure in writing;</li> <li>2. Notify Contractor;</li> <li>3. Require Contractor to propose remedial measures for the analysed noise</li> </ol> | <ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance;</li> <li>2. Submit proposals for remedial actions to the ER and copy to the ET and IEC within 3 working days of notification;</li> </ol> |

## Appendix J - Event Action Plans

| Event | Action  |   |   |   |
|-------|---|---|---|---|
|       | ET  | IEC   | ER  | Contractor  |
|       | <p>procedures to determine possible mitigation to be implemented;</p> <p>5. Record the causes and action taken for the exceedances;</p> <p>6. Increase the monitoring frequency;</p> <p>7. Assess the effectiveness of the Contractor's remedial action with the ER and keep the IEC informed of the results;</p> <p>8. If exceedance stops, cease additional monitoring.</p> | <p>ER accordingly;</p> <p>3. Supervise the implementation of remedial measures.</p> | <p>problem;</p> <p>4. Ensure remedial measures properly implemented;</p> <p>5. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated.</p> | <p>3. Implement the agreed proposals;</p> <p>4. Resubmit proposals if problem still not under control;</p> <p>5. Stop the relevant portion of works as determined by the ER until the exceedance is abated.</p> |

## Appendix J - Event Action Plans

**Table J-3      Event/Action Plan for Landscape and Visual**

| Event                          | Action   |   |  |   |
|--------------------------------|--|---|--|---|
|                                | ET   | IEC   | ER   | Contractor  |
| Non-conformity on one occasion | <ol style="list-style-type: none"> <li>1. Identify Source;</li> <li>2. Inform the IEC and the ER;</li> <li>3. Discuss remedial actions with IEC, ER and Contractor</li> <li>4. Monitor remedial actions until rectification has been completed.</li> </ol> | <ol style="list-style-type: none"> <li>1. Check report;</li> <li>2. Check Contractor's working method;</li> <li>3. Discuss with ET and the Contractor on possible remedial measures;</li> <li>4. Advise ER on effectiveness of proposed remedial measures;</li> <li>5. Check implementation of remedial measures</li> </ol> | <ol style="list-style-type: none"> <li>1. Notify Contractor;</li> <li>2. Ensure remedial measures are properly implemented.</li> </ol> | <ol style="list-style-type: none"> <li>1. Amend working methods;</li> <li>2. Rectify damage and undertake any necessary replacement.</li> </ol> |

## Appendix J - Event Action Plans

| Event                      | Action   |  |  |   |
|----------------------------|--|--|--|---|
|                            | ET   | IEC  | ER   | Contractor  |
| Repeated<br>Non-conformity | <ol style="list-style-type: none"> <li>1. Identify source;</li> <li>2. Inform the IEC and the ER;</li> <li>3. Increase monitoring frequency;</li> <li>4. Discuss remedial actions with the IEC, the ER and the Contractor;</li> <li>5. Monitor remedial actions until rectification has been completed;</li> <li>6. If exceedance stops, cease additional monitoring.</li> </ol> | <ol style="list-style-type: none"> <li>1. Check monitoring report;</li> <li>2. Check Contractor's working method;</li> <li>3. Discuss with ET and the Contractor on possible remedial measures;</li> <li>4. Advise ER on effectiveness of proposed remedial measures;</li> <li>5. Check implementation of remedial measures</li> </ol> | <ol style="list-style-type: none"> <li>1. Notify Contractor;</li> <li>2. Ensure remedial measures are properly implemented.</li> </ol> | <ol style="list-style-type: none"> <li>1. Amend working methods;</li> <li>2. Rectify damage and undertake any necessary replacement.</li> </ol> |



---

**APPENDIX K  
ENVIRONMENTAL MITIGATION  
IMPLEMENTATION SCHEDULE (EMIS)**

---

| EM&A Ref.          | Recommended Mitigation Measures  | Objectives of the Recommended Measures & Main Concern to Address | Location/Timing   | Implementation Agent           | Relevant Standard or Requirement | Implementation Stages |   |   | Status |
|--------------------|--|--|---|--------------------------------|----------------------------------|-----------------------|---|---|--------|
|                    |  |  |   |                                |                                  | D                     | C | O |        |
| Air Quality Impact |  |  |   |                                |                                  |                       |   |   |        |
| S2.3.1.1           | The specific mitigation comprises the following:<br><br>watering of the construction areas 12 times per day to reduce dust emissions by 91.7%, with reference to the “Control of Open Fugitive Dust Sources” (USEPA AP-42). The amount of water to be applied would be 0.91L/m <sup>2</sup> for the respective watering frequency; | To minimize dust emission during construction works              | All relevant works sites, conveyor belts and stockpiles | Contractor and Sub-contractors | APCO / EIAO                      | Y                     | Y |   | ^      |
|                    | Dust enclosures with watering would be provided along the loading ramps and conveyor belts for unloading the C&D materials to the barge for dust suppression; and  |  |   |                                |                                  |                       |   |   | N/A(1) |
|                    | 3-sided barriers around the stockpiling areas WA3 and WA4.   |  |   |                                |                                  |                       |   |   | ^      |
| S2.3.1.2           | The dust control measures detailed below shall also be incorporated into the Contract Specification where practicable as an integral part of good construction practice:<br><br>Use of regular watering to reduce dust emissions from exposed site surfaces and unpaved roads, particularly during dry weather;                    | To minimize dust emission during construction works              | All relevant works sites                                | Contractor and Sub-contractors | APCO / EIAO                      | Y                     | Y |   | ^      |
|                    | Use of frequent watering for particularly dusty construction areas and areas close to ASRs;  |  |   |                                |                                  |                       |   |   | ^      |
|                    | Side enclosure and covering of any aggregate or dusty material storage piles to reduce emissions. Where this is not practicable owing to frequent usage, watering shall be applied to aggregate fines;   |  |   |                                |                                  |                       |   |   | ^      |
|                    | Open stockpiles shall be avoided or covered. Prevent placing dusty material storage piles near ASRs;   |  |   |                                |                                  |                       |   |   | ^      |
|                    | Tarpaulin covering of all dusty vehicle loads transported to, from and between site locations;   |  |   |                                |                                  |                       |   |   | ^      |
|                    | Establishment and use of vehicle wheel and body washing facilities at the exit points of the site;   |  |   |                                |                                  |                       |   |   | ^      |
|                    | Imposition of speed controls for vehicles on unpaved site roads, 8 km per hour is the recommended limit;   |  |   |                                |                                  |                       |   |   | N/A(1) |

| EM&A Ref.    | Recommended Mitigation Measures  | Objectives of the Recommended Measures & Main Concern to Address | Location/Timing          | Implementation Agent           | Relevant Standard or Requirement | Implementation Stages |   |   | Status |
|--------------|--|--|--------------------------|--------------------------------|----------------------------------|-----------------------|---|---|--------|
|              |  |  |                          |                                |                                  | D                     | C | O |        |
|              | Routing of vehicles and position of construction plant should be at the maximum possible distance from ASRs;   |  |                          |                                |                                  |                       |   |   | ^      |
|              | Every stock of more than 20 bags of cement or dry pulverised fuel ash (PFA) should be covered entirely by impervious sheeting or placed in an area sheltered on the top and the 3 sides;   |  |                          |                                |                                  |                       |   |   | ^      |
|              | Cement or dry PFA delivered in bulk should be stored in a closed silo fitted with an audible high level alarm which is interlocked with the material filling line and no overfilling is allowed; and   |  |                          |                                |                                  |                       |   |   | N/A(1) |
|              | Loading, unloading, transfer, handling or storage of bulk cement or dry PFA should be carried out in a totally enclosed system or facility, and any vent or exhaust should be fitted with an effective fabric filter or equivalent air pollution control system.   |  |                          |                                |                                  |                       |   |   | N/A(1) |
| Noise Impact |  |  |                          |                                |                                  |                       |   |   |        |
| S3.4.1.1     | The use of quieter plant, including Quality Powered Mechanical Equipment (QPME) is specified for the list of equipment:<br>- Concrete lorry mixer<br>- Dump Truck, 5.5 tonne < gross vehicle weight ≤ 38 tonne<br>- Generator, Super Silenced, 70 dB(A) at 7m<br>- Poker, vibratory, Hand-held (electric)<br>- Water Pump, Submersible (Electric)<br>- Mobile Crane - KOBELCO CKS900<br>- Excavator, wheeled/tracked - HYUNDAI R80CR-9 | To minimise air-borne noise impacts                              | All relevant works sites | Contractor and Sub-contractors | NCO / EIAO                       |                       | Y |   | ^      |
| S3.4.1.1     | Use of temporary or fixed noise barriers with a surface density of at least 10kg/m <sup>2</sup> to screen noise from movable and stationary plant.   | To minimise air-borne noise impacts                              | All relevant works sites | Contractor and Sub-contractors | NCO / EIAO                       |                       | Y |   | ^      |
| S3.4.1.1     | Use of enclosures with covers at top and three sides and a surface density of at least 10kg/m <sup>2</sup> to screen noise from generally static noisy plant such as air compressors.  | To minimise air-borne noise impacts                              | All relevant works sites | Contractor and Sub-contractors | NCO / EIAO                       |                       | Y |   | N/A(1) |
| S3.4.1.1     | Use of acoustic fabric for the silent piling system, drill rigs, rock drills etc.  | To minimise air-borne noise impacts                              | All relevant works sites | Contractor and Sub-contractors | NCO / EIAO                       |                       | Y |   | ^      |
| S3.4.1.1     | Proper fitting of silencers and mufflers on the ventilation fans.  | To minimise air-borne noise impacts                              | All relevant works sites | Contractor and Sub-contractors | NCO / EIAO                       |                       | Y |   | N/A(1) |

| EM&A Ref.     | Recommended Mitigation Measures  | Objectives of the Recommended Measures & Main Concern to Address                                  | Location/Timing          | Implementation Agent           | Relevant Standard or Requirement                    | Implementation Stages |   |   | Status |
|---------------|--|---|--------------------------|--------------------------------|---|-----------------------|---|---|--------|
|               |  |   |                          |                                |   | D                     | C | O |        |
| S3.4.1.1      | Implementation of good site practice:  | To minimise air-borne noise impacts   | All relevant works sites | Contractor and Sub-contractors | NCO / EIAO  |                       | Y |   | ^      |
|               | Only well-maintained plant should be operated on-site and plants should be serviced regularly during the construction period;  |   |                          |                                |   |                       |   |   | ^      |
|               | Mobile plant, if any, should be sited as far from NSRs as possible;  |   |                          |                                |   |                       |   |   | ^      |
|               | Plant known to emit noise strongly in one direction should, wherever possible, be properly orientated so that the noise is directed away from the nearby NSRs;   |   |                          |                                |   |                       |   |   | ^      |
|               | Use of site hoarding as a noise barrier to screen noise at low level NSRs;   |   |                          |                                |   |                       |   |   | ^      |
|               | Machines and plant that may be in intermittent use should be shut down between works periods or should be throttled down to a minimum; and   |   |                          |                                |   |                       |   |   | ^      |
|               | Any material stockpiles and other structures should be effectively utilised, wherever practicable, to screen the noise from on-site construction activities.   |   |                          |                                |   |                       |   |   | ^      |
|               | The advancing speed of the TBM should be restricted to 2m/hr in order to ensure compliance with the daytime ground-borne noise limits.   |   |                          |                                |   |                       |   |   | N/A    |
| Water Quality |  |   |                          |                                |   |                       |   |   |        |
| S4.2.1.1      | In accordance with the Practice Note for Professional Persons on Construction Site Drainage, Environmental Protection Department, 1994 (ProPECC PN 1/94), construction phase mitigation measures shall include the following:<br><br>Surface run-off from the construction site, including all Works Areas, will be discharged into storm drains via adequately designed sand/silt removal facilities such as sand traps, silt traps and sedimentation basins. At the establishment of works sites and works areas including the barging point, perimeter cut-off drains to direct off-site water around the site should be constructed with internal drainage works and erosion and sedimentation control facilities implemented. Channels (both temporary and permanent drainage pipes and culverts), earth bunds or sand bag barriers should be provided to divert the storm water to the silt removal facilities. The design of the temporary on-site drainage system will be undertaken by the Contractor prior to the commencement of construction and the catch-pits and perimeter channels would be constructed in advance of site formation works and earthworks; | To control water quality impact from construction site runoff and general construction activities | All works sites          | Contractor and Sub-contractors | Water Pollution Control Ordinance / ProPECC PN 1/94 |                       | Y |   | ^      |

| EM&A Ref. | Recommended Mitigation Measures   | Objectives of the Recommended Measures & Main Concern to Address | Location/Timing | Implementation Agent | Relevant Standard or Requirement | Implementation Stages |   |   | Status |
|-----------|---|--|-----------------|----------------------|----------------------------------|-----------------------|---|---|--------|
|           |   |  |                 |                      |                                  | D                     | C | O |        |
|           | Dikes or embankments for flood protection should be implemented around the boundaries of earthwork areas and Works Areas. Temporary ditches should be provided to facilitate the runoff discharge into an appropriate watercourse, through a site/sediment trap;  |  |                 |                      |                                  |                       |   |   | ^      |
|           | The design of efficient silt removal facilities should be based on the guidelines in Appendix A1 of ProPECC PN 1/94, which states that the retention time for silt/sand traps should be 5 minutes under maximum flow conditions. The sizes may vary depending upon the flow rate, but for a flow rate of 0.1m <sup>3</sup> /s, a sedimentation basin of 30m <sup>3</sup> would be required and for a flow rate of 0.5m <sup>3</sup> /s the basin would be 150m <sup>3</sup> . All effluent discharged from the construction site should comply with the standards stipulated in the TM-DSS. The detailed design of the sand/silt traps shall be undertaken by the Contractor prior to the commencement of construction; |  |                 |                      |                                  |                       |   |   | N/A(1) |
|           | In accordance with ProPECC PN 1/94, the construction works should be programmed to minimise surface excavation works during rainy seasons (April to September), as far as practicable. All exposed earth areas should be completed and vegetated as soon as possible after the earthworks have been completed, or alternatively, within 14 days of the cessation of earthworks where practicable. If excavation of soil cannot be avoided during the rainy season, or at any time of year when rainstorms are likely, exposed slope surfaces should be covered by tarpaulin or other means;   |  |                 |                      |                                  |                       |   |   | ^      |
|           | The overall slope of works sites should be kept to a minimum to reduce the erosive potential of surface water flows, and all trafficked areas and access roads should be protected by coarse stone ballast. An additional advantage accruing from the use of crushed stone is the positive traction gained during the prolonged periods of inclement weather and the reduction of surface sheet flows;  |  |                 |                      |                                  |                       |   |   | ^      |
|           | All drainage facilities and erosion and sediment control structures should be regularly inspected and maintained to ensure their proper and efficient operation at all times particularly following rainstorms. Deposited silts and grits should be removed regularly and disposed of by spreading evenly over stable, vegetated areas;   |  |                 |                      |                                  |                       |   |   | ^      |
|           | Measures should be taken to minimise the ingress of site drainage into excavations. If the excavation of trenches in wet season is inevitable, they should be dug and backfilled in short sections wherever practicable. The water pumped out from trenches or foundation excavations should be discharged into storm drains via silt removal facilities;   |  |                 |                      |                                  |                       |   |   | ^      |

| EM&A Ref. | Recommended Mitigation Measures  | Objectives of the Recommended Measures & Main Concern to Address | Location/Timing | Implementation Agent | Relevant Standard or Requirement | Implementation Stages |   |   | Status |
|-----------|--|--|-----------------|----------------------|----------------------------------|-----------------------|---|---|--------|
|           |  |  |                 |                      |                                  | D                     | C | O |        |
|           | Open stockpiles of construction materials (for example, aggregates, sand and fill material) should be covered with tarpaulin or similar fabric during rainstorms. Measures should be taken to prevent the washing away of construction materials, soil, silt or debris into any drainage system;   |  |                 |                      |                                  |                       |   |   | ^      |
|           | Manholes (including newly constructed ones) should always be adequately covered and temporarily sealed so as to prevent silt, construction materials or debris being washed into the drainage system and storm runoff being directed into foul sewers;   |  |                 |                      |                                  |                       |   |   | ^      |
|           | Precautions to be taken at any time of the year when rainstorms are likely, actions to be taken when a rainstorm is imminent or forecasted and during or after rainstorms, are summarised in Appendix A2 of ProPECC PN 1/94. Particular attention should be paid to the control of silty surface runoff during storm events;   |  |                 |                      |                                  |                       |   |   | N/A(1) |
|           | All vehicles and plant should be cleaned before leaving a construction site to ensure no earth, mud, debris and the like is deposited by them on roads. An adequately designed and sited wheel washing facilities should be provided at the exit of every construction site where practicable. Wash- water should have sand and silt settled out and removed at least on a weekly basis to ensure the continued efficiency of the process. The section of access road leading to, and exiting from, the wheel-washing bay to public roads should be paved with sufficient backfall toward the wheel- washing bay to prevent vehicle tracking of soil and silty water to public roads and drains; |  |                 |                      |                                  |                       |   |   | ^      |
|           | Oil interceptors should be provided in the drainage system downstream of any oil/fuel pollution sources, specifically Works Areas WA1, WA2, WA4 and WA5 where plant maintenance is proposed. Oil interceptors should be emptied and cleaned regularly to prevent the release of oil and grease into the storm water drainage system after accidental spillage. A bypass should be provided for oil interceptors to prevent flushing during heavy rain;   |  |                 |                      |                                  |                       |   |   | N/A(1) |
|           | The construction solid waste, debris and rubbish on-site should be collected, handled and disposed of properly to avoid causing any water quality impacts. The requirements for solid waste management are detailed in Section 11 Waste Management of this EIA report; and   |  |                 |                      |                                  |                       |   |   | ^      |
|           | All fuel tanks and storage areas should be provided with locks and sited on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank to prevent spilled fuel oils from reaching the nearby WSRs.   |  |                 |                      |                                  |                       |   |   | #      |

| EM&A Ref.            | Recommended Mitigation Measures  | Objectives of the Recommended Measures & Main Concern to Address                   | Location/Timing                       | Implementation Agent           | Relevant Standard or Requirement         | Implementation Stages |   |   | Status |
|----------------------|--|--|---------------------------------------|--------------------------------|--|-----------------------|---|---|--------|
|                      |  |  |                                       |                                |  | D                     | C | O |        |
| S4.2.1.1 and 4.3.1.5 | There is a need to apply to the EPD for a discharge licence for discharge of effluent from the construction site under the WPCO. The discharge quality must meet the requirements specified in the discharge licence. All the runoff and wastewater generated from the works areas should be treated so that it satisfies all the standards listed in the TM-DSS. Minimum distances of 100m should be maintained between the discharge points of construction site effluent and the existing seawater intakes. The beneficial uses of the treated effluent for other on-site activities such as dust suppression, wheel washing and general cleaning etc, can minimise water consumption and reduce the effluent discharge volume. If monitoring of the treated effluent quality from the works areas is required during the construction phase of the Project, the monitoring should be carried out in accordance with the WPCO license | To control water quality impact from effluent discharge from construction site     | All works sites                       | Contractor and Sub-contractors | Water Pollution Control Ordinance        |                       | Y |   | N/A(1) |
| S4.2.1.1             | Specific mitigation measures for the tunnelling works using TBM, soft ground and mechanical excavation techniques should include the following:<br><br>The cut-and-cover tunnelling works should be conducted sequentially as far as practicable to limit the amount of construction wastewater generated from the exposed areas during the wet season (April to September);   | To minimize construction water quality impact from tunnelling and excavation works | All tunnelling and excavation portion | Contractor and Sub-contractors | TMEIA<br>TMwater ProPECC PN 1/94<br>WPCO |                       | Y |   | N/A    |
|                      | Uncontaminated discharge should pass through settlement tanks prior to discharge;  |  |                                       |                                |  |                       |   |   | N/A    |
|                      | If contaminated groundwater is found during the course of the works, no direct discharge of groundwater from contaminated areas should be adopted. Any contaminated groundwater should be properly treated in compliance with the requirements of the TM-DSS. If wastewater treatment is to be deployed for treating the contaminated groundwater, the wastewater treatment unit should deploy suitable treatment processes (e.g. oil interceptor/activated carbon) to reduce the pollution level to an acceptable standard and remove any prohibited substances (such as TPH) to an undetectable range;   |  |                                       |                                |  |                       |   |   | N/A    |
|                      | If groundwater recharging wells are deployed, recharging wells should be installed as appropriate for recharging the contaminated groundwater back into the ground. The recharging wells should be selected at places where the groundwater quality will not be affected by the recharge operation as indicated in the Section 2.3 of TM-DSS;  |  |                                       |                                |  |                       |   |   | N/A    |

| EM&A Ref. | Recommended Mitigation Measures   | Objectives of the Recommended Measures & Main Concern to Address | Location/Timing | Implementation Agent | Relevant Standard or Requirement | Implementation Stages |   |   | Status |
|-----------|---|--|-----------------|----------------------|----------------------------------|-----------------------|---|---|--------|
|           |   |  |                 |                      |                                  | D                     | C | O |        |
|           | The baseline groundwater quality shall be determined prior to the selection of the recharge wells, and submit a working plan (including the laboratory analytical results showing the quality of groundwater at the proposed recharge location(s) as well as the pollutant levels of groundwater to be recharged) to EPD for agreement. Pollution levels of groundwater to be recharged shall not be higher than pollutant levels of ambient groundwater at the recharge well. Prior to recharge, any prohibited substances such as TPH products should be removed as necessary by installing the petrol interceptor; |  |                 |                      |                                  |                       |   |   | N/A    |
|           | The wastewater with high concentrations of SS should be treated such as by settlement in tanks with sufficient retention time before discharge. Oil interceptors would also be required to remove the oil, lubricants and grease from the wastewater.   |  |                 |                      |                                  |                       |   |   | N/A    |



| EM&A Ref. | Recommended Mitigation Measures  | Objectives of the Recommended Measures & Main Concern to Address | Location/Timing          | Implementation Agent           | Relevant Standard or Requirement | Implementation Stages |   |   | Status |
|-----------|--|--|--------------------------|--------------------------------|----------------------------------|-----------------------|---|---|--------|
|           |  |  |                          |                                |                                  | D                     | C | O |        |
| S4.2.1.1  | In order to prevent any accidental release of bentonite slurry from getting into the surrounding environment, the following specific control measures shall be followed to reduce the risk and impacts of accidental spillage:   | To control water quality impact from bentonite slurry            | All relevant works sites | Contractor and Sub-contractors | WPCO                             |                       | Y |   | ^      |
|           | All bentonite slurry should be stored in a container that resistant to corrosion, maintained in good conditions and securely closed;   |  |                          |                                |                                  |                       |   |   | ^      |
|           | The container should be labelled in English and Chinese and note that the container is for storage of bentonite slurry only;   |  |                          |                                |                                  |                       |   |   | N/A(1) |
|           | The storage container should be placed on an area of impermeable flooring and bunded with capacity to accommodate 110% of the volume of the container size or 20% by volume stored in the area and enclosed with at least 3 sides;   |  |                          |                                |                                  |                       |   |   | ^      |
|           | The storage container should be sufficiently covered to prevent rainfall entering the container or bunded area (water collected within the bund must be tested and disposed of as chemical waste, if necessary);   |  |                          |                                |                                  |                       |   |   | N/A(1) |
|           | An emergency clean up kit shall be readily available where bentonite fluid will be stored or used; and   |  |                          |                                |                                  |                       |   |   | N/A(1) |
|           | The handling and disposal of bentonite slurries should be undertaken in accordance within ProPECC PN 1/94. Surplus bentonite slurries used in construction works shall be reconditioned and reused wherever practicable. Residual bentonite slurry shall be disposed of from the site as soon as possible as stipulated in Clause 8.56 of the General Specification for Civil Engineering Works. The Contractor should explore alternative disposal outlets for the residual bentonite slurry (dewatered bentonite slurry to be disposed to a public filling area and liquid bentonite slurry, if mixed with inert fill material, to be disposed to a public filling area) and disposal at landfill should be the last resort. |  |                          |                                |                                  |                       |   |   |        |

| EM&A Ref. | Recommended Mitigation Measures   | Objectives of the Recommended Measures & Main Concern to Address       | Location/Timing | Implementation Agent           | Relevant Standard or Requirement | Implementation Stages |   |   | Status |
|-----------|---|--|-----------------|--------------------------------|----------------------------------|-----------------------|---|---|--------|
|           |   |  |                 |                                |                                  | D                     | C | O |        |
| S4.2.1.1  | <p>The proposed barging point at South Apron will not involve marine works like dredging or modifying the submerged portion of the existing seawall. As such, no direct adverse water quality impacts are anticipated during its construction or operation. However, mitigation measures as outlined above should be applied to minimise water quality impacts from site run-off and temporary open stockpiles of spoil at the proposed barging point, where appropriate. Other good site practices include:</p> <p>All vessels should be sized so that adequate clearance is maintained between vessels and the seabed in all tide conditions, to ensure that undue turbidity is not generated by turbulence from vessel movement or propeller wash;</p> | To minimize construction water quality impact from barging point       | Barging Point   | Contractor and Sub-contractors | EIAO-TM WPCO                     |                       | Y |   | N/A(1) |
|           | All hopper barges should be fitted with tight fitting seals to their bottom openings to prevent leakage of material;  |  |                 |                                |                                  |                       |   |   | ^      |
|           | Construction activities should not cause foam, oil, grease, scum, litter or other objectionable matter to be present on the water within the site; and  |  |                 |                                |                                  |                       |   |   | N/A(1) |
|           | Loading of barges and hoppers should be controlled to prevent splashing of material into the surrounding water. Barges or hoppers should not be filled to a level that will cause the overflow of materials or polluted water during loading or transportation.   |  |                 |                                |                                  |                       |   |   | N/A    |
| S4.2.1.1  | If chemical toilets and sewage holding tanks are required for handling sewage generated by the construction workforce, a licensed contractor should be employed to provide appropriate and adequate portable toilets and be responsible for appropriate disposal and maintenance.   | To minimize construction water quality impact from sewage and effluent | All works sites | Contractor                     | WPCO                             |                       | Y |   | ^      |
| S4.2.1.1  | In order to protect against impacts to the surrounding marine waters of the KTTS and Victoria Harbour in the event of an accidental spillage of fuel or oil, the Contractor will be required to prepare a spill response plan to the satisfaction of AFCD, EPD, FSD, Police, TD and WSD to define procedures for the control, containment and clean-up of any spillage that could occur on the construction site.   | To control water quality impact from accidental chemical spillage      | All works sites | Contractor                     | EIAO-TM WPCO<br>WDO              |                       | Y |   | N/A(1) |

| EM&A Ref. | Recommended Mitigation Measures  | Objectives of the Recommended Measures & Main Concern to Address  | Location/Timing | Implementation Agent | Relevant Standard or Requirement | Implementation Stages |   |   | Status |
|-----------|--|---|-----------------|----------------------|----------------------------------|-----------------------|---|---|--------|
|           |  |   |                 |                      |                                  | D                     | C | O |        |
| S4.2.1.1  | The Contractor must, also, register as a chemical waste producer if chemical wastes would be produced from the construction activities. The Waste Disposal Ordinance (Cap 354) and its subsidiary regulations in particular the Waste Disposal (Chemical Waste) (General) Regulation should be observed and complied with for control of chemical wastes.  | To control water quality impact from accidental chemical spillage | All works sites | Contractor           | EIAO-TM WPCO WDO                 |                       | Y |   | N/A(1) |
| S4.2.1.1  | Any service shop and maintenance facilities should be located on hard standings within a bunded area, and sumps and oil interceptors should be provided. Maintenance of vehicles and equipment involving activities with potential for leakage and spillage should only be undertaken within the areas appropriately equipped to control these discharges. | To control water quality impact from accidental chemical spillage | All works sites | Contractor           | EIAO-TM WPCO WDO                 |                       | Y |   | N/A(1) |
| S4.2.1.1  | Disposal of chemical wastes should be carried out in compliance with the Waste Disposal Ordinance. The Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes published under the Waste Disposal Ordinance details the requirements to deal with chemical wastes. General requirements are given as follows:                          | To control water quality impact from accidental chemical spillage | All works sites | Contractor           | EIAO-TM WPCO WDO                 |                       | Y |   | ^      |
|           | Suitable containers should be used to hold the chemical wastes to avoid leakage or spillage during storage, handling and transport;  |   |                 |                      |                                  |                       |   |   | N/A(1) |
|           | Chemical waste containers should be suitably labelled, to notify and warn the personnel who are handling the wastes, to avoid accidents; and   |   |                 |                      |                                  |                       |   |   | ^      |
| S4.2.1.1  | Storage area should be selected at a safe location on site and adequate space should be allocated to the storage area.   | To mitigate runoff from tunnel during the operational phase       | Tunnel          | CEDD                 | WPCO                             |                       |   | Y | N/A    |
|           | The road drainage in the tunnel should pass through oil interceptors to remove oil, and grease before being discharged into the public storm water drainage system;  |   |                 |                      |                                  |                       |   |   | N/A    |
|           | Silt traps and oil interceptors should be cleaned and maintained regularly; and  |   |                 |                      |                                  |                       |   |   | N/A    |
|           | The oily contents of oil interceptors should be transferred to an appropriate disposal facility, or to be collected for reuse, if possible.  |   |                 |                      |                                  |                       |   |   |        |

| EM&A Ref.      | Recommended Mitigation Measures   | Objectives of the Recommended Measures & Main Concern to Address | Location/Timing | Implementation Agent | Relevant Standard or Requirement                              | Implementation Stages |   |   | Status |
|----------------|---|--|-----------------|----------------------|---|-----------------------|---|---|--------|
|                |   |  |                 |                      |   | D                     | C | O |        |
| Marine Ecology |   |  |                 |                      |   |                       |   |   |        |
| S5.3.1.1       | Good construction practice measures have been recommended to be implemented as follows: | Minimize waste generation during construction                    | Contractor      | Work Sites           | Construction phase of Main Works Stage 1, Stage 2 and Stage 3 |                       | Y |   | N/A(1) |
|                | Avoid damage and disturbance to the remaining and surrounding natural habitat;          |  |                 |                      |   |                       |   |   | N/A(1) |
|                | Placement of equipment in designated areas within the existing disturbed land;          |  |                 |                      |   |                       |   |   | N/A(1) |
|                | Spoil heaps should be covered at all times;   |  |                 |                      |   |                       |   |   | N/A(1) |
|                | Construction activities should be restricted to the designated works areas; and         |  |                 |                      |   |                       |   |   | N/A(1) |
|                | Disturbed areas to be reinstated immediately after completion of the works.             |  |                 |                      |   |                       |   |   | N/A(1) |
| Fisheries      |   |  |                 |                      |   |                       |   |   |        |
| S6.2.1.2       | No fisheries specific mitigation measures.  |  |                 |                      |   |                       |   |   |        |

| EM&A Ref.            | Recommended Mitigation Measures  | Objectives of the Recommended Measures & Main Concern to Address                            | Location/Timing          | Implementation Agent | Relevant Standard or Requirement | Implementation Stages |   |   | Status |
|----------------------|--|---|--------------------------|----------------------|----------------------------------|-----------------------|---|---|--------|
|                      |  |   |                          |                      |                                  | D                     | C | O |        |
| Landscape and Visual |  |   |                          |                      |                                  |                       |   |   |        |
| S7.2.1.2             | All works shall be carefully designed to minimize impacts on existing landscape resources and visually sensitive receivers. Existing trees within works area shall be retained and protected.  | To minimise impact on existing trees  | All relevant works sites | CEDD's Contractor    | EIAO TM                          | Y                     | Y |   | ^      |
| S7.2.1.2             | Existing trees of good quality and condition that are unavoidably affected by the works should be transplanted.  | To minimise impact on existing trees  | All relevant works sites | CEDD's Contractor    | EIAO TM                          | Y                     | Y |   | N/A    |
| S7.2.1.2             | Large temporary stockpiles of excavated material shall be covered with unobtrusive sheeting to prevent dust and dirt spreading to adjacent landscape areas and vegetation, and to create a neat and tidy visual appearance.  | To prevent unnecessary dust and dirt contaminating the air and adjacent areas.              | All relevant works sites | CEDD's Contractor    | EIAO TM                          |                       | Y |   | ^      |
| S7.2.1.2             | Construction plant and building material shall be orderly and carefully stored in order to create a neat and tidy visual appearance.   | To mitigate potential visually obtrusive areas  | All relevant works sites | CEDD's Contractor    | EIAO TM                          |                       | Y |   | ^      |
| S7.2.1.2             | Erection of decorative screen hoarding should be designed to be compatible with the existing urban context.  | To mitigate and screen any potential visually obtrusive areas and enhance urban environment | All relevant works sites | CEDD's Contractor    | EIAO TM                          |                       | Y |   | ^      |
| S7.2.1.2             | All lighting in construction site shall be carefully controlled to minimize light pollution and night-time glare to nearby residences and GIC user. The contractor shall consider other security measures, which shall minimize the visual impacts.  | To mitigate light pollution and adverse visual impacts on surrounding environment           | All relevant works sites | CEDD's Contractor    | EIAO TM                          |                       | Y |   | ^      |
| S7.2.1.2             | Compensatory tree planting shall be incorporated along all roadside amenity areas affected by the construction works. The required numbers and locations of compensatory trees shall be determined and agreed with the Government during Tree Removal Application process under ETWB TCW No. 3/2006. | To reinstate and maximise compensatory tree numbers to equal or greater conditions          | All relevant works sites | CEDD's Contractor    | EIAO TM                          |                       | Y |   | N/A(1) |

| EM&A Ref. | Recommended Mitigation Measures   | Objectives of the Recommended Measures & Main Concern to Address   | Location/Timing          | Implementation Agent | Relevant Standard or Requirement | Implementation Stages |   |   | Status |
|-----------|---|--|--------------------------|----------------------|----------------------------------|-----------------------|---|---|--------|
|           |   |  |                          |                      |                                  | D                     | C | O |        |
| S7.2.1.2  | Compensatory tree planting shall be incorporated by the Project. The required numbers of compensatory trees shall follow the requirements of ETWB TCW No. 3/2006. Loss of amenity area adjacent to the Kwun Tong By-pass and planting areas in KTD South Apron will be mitigated by the creation of the Kai Tak South Apron: Amenity Area, which will be equal to or larger than the current provision. | To reinstate and maximise compensatory tree  | All relevant works sites | CEDD's Contractor    | EIAO TM                          |                       | Y |   | N/A(1) |
| S7.2.1.2  | Trees and shrubs and climbers etc. shall be planted to soften and screen proposed roads, central strip and associated structure, and to enhance streetscape greening effect where appropriate.  | To mitigate hard surfaces and hard standing landscape areas and to soften and enhance proposed design features | All relevant works sites | CEDD's Contractor    | EIAO TM                          | Y                     |   | Y | N/A    |
| S7.2.1.2  | All works area, excavated area and disturbed area for tunnel construction and temporary road diversion or any other proposed works shall be reinstated to former conditions or better, with reasonable landscape treatment and to the satisfaction of the relevant Government departments.  | To reinstate and maximise hard and soft landscape areas to equal or greater conditions                         | All relevant works sites | CEDD's Contractor    | EIAO TM                          | Y                     |   | Y | N/A    |
| S7.2.1.2  | Tunnel portals and all above ground structures shall be sensitively designed to ensure the element with colour, texture and tonal quality being compatible to the existing urban context. Trees and shrub planting to minimize the potential adverse landscape and visual impacts shall be included where space permits. Roof top greening and vertical greening shall also be provided.                | To mitigate hard surfaces and hard standing landscape areas and to soften and enhance proposed design features | All relevant works sites | CEDD's Contractor    | EIAO TM                          | Y                     |   | Y | N/A    |
| S7.2.1.2  | All works shall be carefully designed to minimize impacts on existing landscape resources and visually sensitive receivers. Existing trees within works area shall be retained and protected.   | To minimise impact on existing trees   | All relevant works sites | CEDD's Contractor    | EIAO TM                          | Y                     |   | Y | N/A    |
| S7.2.1.2  | Existing trees of good quality and condition that are unavoidably affected by the works should be transplanted.   | To minimise impact on existing trees   | All relevant works sites | CEDD's Contractor    | EIAO TM                          | Y                     |   | Y | N/A    |

| EM&A Ref.                    | Recommended Mitigation Measures  | Objectives of the Recommended Measures & Main Concern to Address                   | Location/Timing                            | Implementation Agent | Relevant Standard or Requirement | Implementation Stages |   |   | Status |
|------------------------------|--|--|--|----------------------|----------------------------------|-----------------------|---|---|--------|
|                              |  |  |  |                      |                                  | D                     | C | O |        |
| Cultural Heritage            |  |  |  |                      |                                  |                       |   |   |        |
| S8.2.1.1 and 8.2.1.2         | No culture heritage specific mitigation measures   |  |  |                      |                                  |                       |   |   |        |
| Waste Management Implication |  |  |  |                      |                                  |                       |   |   |        |
| S9.2.1.2                     | The requirements as stipulated in the ETWB TC(W) No.19/2005 Environmental Management on Construction Sites and the other relevant guidelines should be included in the Particular Specification for the future contractor as appropriate.  | To keep trace of the generation, minimization, reuse and disposal of C&D materials | All areas / throughout construction period | Contractor           | ETWB TC(W) No.19/2005            |                       | Y |   | N/A    |
| S9.2.1.2                     | The future contractor should be requested to submit an outline Waste Management Plan (WMP) prior to the commencement of construction work, in accordance with the ETWB TC(W) No.19/2005 so as to provide an overall framework of waste management and reduction. The WMP should include:<br>- Waste management policy;<br>- Record of generated waste;<br>- Waste reduction target;<br>- Waste reduction programme;<br>- Role and responsibility of waste management team;<br>- Benefit of waste management;<br>- Analysis of waste materials;<br>- Reuse, recycling and disposal plans;<br>- Transportation process of waste products; and<br>- Monitoring and action plan. | To keep trace of the generation, minimization, reuse and disposal of C&D           | All areas / throughout construction period | Contractor           | ETWB TC(W) No.19/2005            |                       | Y |   | N/A(1) |
| S9.2.1.2                     | The waste management hierarchy should be strictly followed. This hierarchy should be adopted to evaluate the waste management options in order to maximise the extent of waste reduction and cost reduction. The records of quantities of waste generated, recycled and disposed (locations) should be properly documented.  | To keep trace of the generation, minimization, reuse and disposal of C&D           | All areas / throughout construction period | Contractor           | ETWB TC(W) No.19/2005            |                       | Y |   | N/A(1) |
| S9.2.1.2                     | A trip-ticket system should be established in accordance with DevB TC(W) No. 6/2010 and Waste Disposal (Charges for Disposal of Construction Waste) Regulation to monitor the disposal of public fill and solid wastes at public filling facilities and landfills, and to control fly-tipping. A trip-ticket system would be included as one of the contractual requirements for the future contractor to strictly implement. The Engineer would also regularly audit the effectiveness of the system.   | To monitor disposal of waste and control fly-tipping                               | All areas / throughout construction period | Contractor           | DEVB TC(W) No. 6/2010            |                       | Y |   | N/A(1) |

| EM&A Ref. | Recommended Mitigation Measures  | Objectives of the Recommended Measures & Main Concern to Address                    | Location/Timing                            | Implementation Agent | Relevant Standard or Requirement                                      | Implementation Stages |   |   | Status |
|-----------|--|---|--|----------------------|---|-----------------------|---|---|--------|
|           |  |   |  |                      |   | D                     | C | O |        |
| S9.2.1.2  | A recording system for the amount of waste generated, recycled and disposed (locations) should be established. The future contractor should also provide proper training to workers regarding the appropriate concepts of site cleanliness and waste management procedures, e.g. waste reduction, reuse and recycling all the time.  | To monitor disposal of waste and control fly-tipping                                | All areas / throughout construction period | Contractor           | DEVB TC(W) No. 6/2010   |                       | Y |   | N/A(1) |
| S9.2.1.2  | The CEDD should be timely notified of the estimated spoil volumes to be generated and the PFC should be notified and agreement sort on the disposal of surplus inert C&D materials e.g. good quality rock during detailed design of the Trunk Road T2 Project. Wherever practicable, C&D materials should be segregated from other wastes to avoid contamination and to ensure acceptability at public filling areas or reclamation sites. | To monitor disposal of waste and control fly-tipping                                | All areas / throughout construction period | Contractor           | DEVB TC(W) No. 6/2010   |                       | Y |   | N/A(1) |
| S9.2.1.2  | The extent of cutting operation should be optimised where possible. Earth retaining structures and bored pile walls should be proposed to minimise the extent of cutting.  | To minimize, reuse and disposal of C&D materials                                    | All areas / throughout construction period | Contractor           | DevB TC(W) No.6/2010  |                       | Y |   | N/A(1) |
| S9.2.1.2  | Inert C&D materials from road pavement would be reused for backfilling where possible  | To minimize, reuse and disposal of C&D materials                                    | All areas / throughout construction period | Contractor           | DevB TC(W) No.6/2010  |                       | Y |   | N/A(1) |
| S9.2.1.2  | TBM generated alluvium and other C&D materials should be treated at a slurry treatment plant prior to transferring to Public Fill Reception Facilities.  | To minimize, reuse and disposal of C&D materials                                    | TMB works area / during TBM works          | Contractor           | DevB TC(W) No.6/2010  |                       | Y |   | ^      |
| S9.2.1.2  | The site and surroundings should be kept tidy and litter free.   | To implement good site practice for handling, sorting reuse and recycling of wastes | All areas / throughout construction period | Contractor           | WDO, Land (Miscellaneous Provisions) Ordinance, DevB TC(W) No. 6/2010 |                       | Y |   | ^      |



| EM&A Ref. | Recommended Mitigation Measures   | Objectives of the Recommended Measures & Main Concern to Address                    | Location/Timing                            | Implementation Agent | Relevant Standard or Requirement                                      | Implementation Stages |   |   | Status |
|-----------|---|---|--|----------------------|---|-----------------------|---|---|--------|
|           |   |   |  |                      |   | D                     | C | O |        |
| S9.2.1.2  | No waste is allowed to be burnt on site.  | To implement good site practice for handling, sorting reuse and recycling of wastes | All areas / throughout construction period | Contractor           | WDO, Land (Miscellaneous Provisions) Ordinance, DevB TC(W) No. 6/2010 |                       | Y |   | ^      |
| S9.2.1.2  | Make provisions in contract documents to allow and promote the use of recycled aggregates where appropriate.  | To implement good site practice for handling, sorting reuse and recycling of wastes | Detailed Design                            | Design Consultant    | WDO, Land (Miscellaneous Provisions) Ordinance, DevB TC(W) No. 6/2010 | Y                     |   |   | N/A(1) |
| S9.2.1.2  | Prohibit the future contractor to dispose of C&D materials at any sensitive locations e.g. natural habitat, etc. The future contractor should propose the final disposal sites in the WMP for approval before implementation. | To implement good site practice for handling, sorting reuse and recycling of wastes | All areas / throughout construction period | Contractor           | WDO, Land (Miscellaneous Provisions) Ordinance, DevB TC(W) No. 6/2010 |                       | Y |   | N/A(1) |
| S9.2.1.2  | Stockpiled C&D materials should be covered by tarpaulin and/or watered as appropriate to prevent windblown dust and surface run off.  | To implement good site practice for handling, sorting reuse and recycling of wastes | All areas / throughout construction period | Contractor           | WDO, Land (Miscellaneous Provisions) Ordinance, DevB TC(W) No. 6/2010 |                       | Y |   | ^      |
| S9.2.1.2  | Excavated C&D materials in trucks should be covered by tarpaulins to reduce the potential for spillage and dust generation.   | To implement good site practice for handling, sorting reuse and recycling of wastes | All areas / throughout construction period | Contractor           | WDO, Land (Miscellaneous Provisions) Ordinance, DevB TC(W) No. 6/2010 |                       | Y |   | ^      |
| S9.2.1.2  | Wheel washing facilities should be used by all trucks leaving the site to prevent transferring mud trails onto public roads.  | To implement good site practice for handling, sorting reuse and recycling of wastes | All areas / throughout construction period | Contractor           | WDO, Land (Miscellaneous Provisions) Ordinance, DevB TC(W) No. 6/2010 |                       | Y |   | ^      |
| S9.2.1.2  | Excavated marine deposit (sediment) should be disposed of in a gazetted marine disposal ground under the requirements of the DASO or treated for backfilling.   | To ensure proper disposal of marine sediment  | All areas / throughout construction period | Contractor           | ETWB TC(W) No.34/2002   |                       | Y |   | N/A(1) |

| EM&A Ref. | Recommended Mitigation Measures  | Objectives of the Recommended Measures & Main Concern to Address | Location/Timing                            | Implementation Agent | Relevant Standard or Requirement                                      | Implementation Stages |   |   | Status |
|-----------|--|--|--|----------------------|---|-----------------------|---|---|--------|
|           |  |  |  |                      |   | D                     | C | O |        |
| S9.2.1.2  | Standard formwork or pre-fabrication should be used as far as practicable to minimise the C&D materials arising. The use of more durable formwork or plastic facing for construction works should also be considered. The use of wooden hoardings should be avoided and metal hoarding should be used to facilitate recycling. Purchasing of construction materials should be carefully planned in order to avoid over-ordering and wastage.   | To minimize, reuse and disposal of C&D materials                 | All areas / throughout construction period | Contractor           | WDO, Land (Miscellaneous Provisions) Ordinance, DevB TC(W) No. 6/2010 |                       | Y |   | N/A(1) |
| S9.2.1.2  | The future contractor should recycle as many C&D materials as possible on-site. The public fill and C&D waste should be segregated and stored in separate containers or skips to facilitate the reuse or recycling of materials and proper disposal. Where practicable, the concrete and masonry should be crushed and used as fill materials. Steel reinforcement bar should be collected for use by scrap steel mills. Different areas of the sites should be considered for segregation and storage activities. | To minimize, reuse and disposal of C&D materials                 | All areas / throughout construction period | Contractor           | WDO, Land (Miscellaneous Provisions) Ordinance, DevB TC(W) No. 6/2010 |                       | Y |   | ^      |
| S9.2.1.2  | All falsework should be steel instead of wood as far as practicable.   | To minimize, reuse and disposal of C&D materials                 | All areas / throughout construction period | Contractor           | DevB TC(W) No.6/2010  |                       | Y |   | N/A(1) |

| EM&A Ref. | Recommended Mitigation Measures   | Objectives of the Recommended Measures & Main Concern to Address                    | Location/Timing                            | Implementation Agent | Relevant Standard or Requirement   | Implementation Stages |   |   | Status |
|-----------|---|---|--|----------------------|--|-----------------------|---|---|--------|
|           |   |   |  |                      |  | D                     | C | O |        |
| S9.2.1.2  | <p>Chemical waste producers should register with the EPD and chemical waste should be handled in accordance with the Code of Practice on the Packaging, Handling and Storage of Chemical Wastes as follows:</p> <ul style="list-style-type: none"> <li>- Suitable for the substance to be held, resistant to corrosion, maintained in good conditions and securely closed;</li> <li>- Having a capacity of &lt;450L unless the specifications have been approved by the EPD; and</li> <li>- Displaying a label in English and Chinese according to the instructions prescribed in Schedule 2 of the Regulations.</li> <li>- Clearly labelled and used solely for the storage of chemical wastes;</li> <li>- Enclosed with at least 3 sides;</li> <li>- Impermeable floor and bund with capacity to accommodate 110% of the volume of the largest container or 20% by volume of the chemical waste stored in the area, whichever is greatest;</li> <li>- Adequate ventilation;</li> <li>- Sufficiently covered to prevent rainfall entering (water collected within the bund must be tested and disposed of as chemical waste, if necessary); and</li> <li>- Incompatible materials are adequately separated.</li> </ul> | To properly store the chemical waste within works sites and works areas             | All areas / throughout construction period | Contractor           | Code of Practice on the Packaging, Handling and Storage of Chemical Wastes |                       | Y |   | ^      |
| S9.2.1.2  | Waste oils, chemicals or solvents should not be disposed of to drain.   | To implement good site practice for handling, sorting reuse and recycling of wastes | All areas / throughout construction period | Contractor           | EIAO TM  |                       | Y |   | ^      |

| EM&A Ref. | Recommended Mitigation Measures  | Objectives of the Recommended Measures & Main Concern to Address   | Location/Timing                               | Implementation Agent | Relevant Standard or Requirement                                      | Implementation Stages |   |   | Status |
|-----------|--|--|---|----------------------|---|-----------------------|---|---|--------|
|           |  |  |   |                      |   | D                     | C | O |        |
| S9.2.1.2  | Adequate numbers of portable toilets should be provided for on-site workers. Portable toilets should be maintained in reasonable states, which will not deter the workers from utilising them. Night soil should be regularly collected by licensed collectors.  | To ensure proper disposal of sewage sludge   | All areas / throughout construction period    | Contractor           | WDO, Land (Miscellaneous Provisions) Ordinance, DevB TC(W) No. 6/2010 |                       | Y |   | N/A(1) |
| S9.2.1.2  | General refuse arising on-site should be stored in enclosed bins or compaction units separately from C&D and chemical wastes. Sufficient dustbins should be provided for storage of waste as required under the Public Cleansing and Prevention of Nuisances By-laws. In addition, general refuse should be cleared daily and disposed of to the nearest licensed landfill. Burning of refuse on construction sites is prohibited. | To separate the general refuse from other waste types and proper disposal of the refuse                        | All areas / throughout construction period    | Contractor           | WDO, Land (Miscellaneous Provisions) Ordinance                        |                       | Y |   | ^      |
| S9.2.1.2  | All waste containers should be in a secure area on hardstanding.   | To implement good site practice for handling, sorting reuse and recycling of wastes                            | All areas / throughout construction period    | Contractor           | WDO, Land (Miscellaneous Provisions) Ordinance                        |                       | Y |   | ^      |
| S9.2.1.2  | Aluminium cans should be collected and recovered from the waste stream by reputable collectors if they are segregated and easily accessible. Separately labelled bins for their deposition should be provided as far as practicable.   | To implement on-site sorting facilitating reuse and recycling of materials as well as proper disposal of waste | All areas / throughout construction period    | Contractor           | WDO, Land (Miscellaneous Provisions) Ordinance                        |                       | Y |   | N/A(1) |
| S9.2.1.2  | Office wastes can be reduced by recycling of paper if such volume is sufficiently large to warrant collection. Participation in a local collection scheme by the future contractor should be advocated. Waste separation facilities for paper, aluminium cans, plastic bottles, etc should be provided on-site.  | To separate the general refuse from other waste types and proper disposal of the refuse                        | Site Offices / throughout construction period | Contractor           | WDO, Land (Miscellaneous Provisions) Ordinance                        |                       | Y |   | N/A(1) |

| EM&A Ref. | Recommended Mitigation Measures   | Objectives of the Recommended Measures & Main Concern to Address  | Location/Timing                            | Implementation Agent | Relevant Standard or Requirement               | Implementation Stages |   |   | Status |
|-----------|---|---|--|----------------------|--|-----------------------|---|---|--------|
|           |   |   |  |                      |  | D                     | C | O |        |
| S9.2.1.2  | Training should be provided to workers about the concepts of site cleanliness and appropriate waste management procedure, including waste reduction, reuse and recycling. | To implement good site practice for handling, sorting reuse and recycling of wastes   | Contract Mobilisation                      | Contractor           | WDO, Land (Miscellaneous Provisions) Ordinance |                       | Y |   | N/A(1) |
| S9.2.1.2  | During construction phase, regular site inspections and supervision of the waste management procedures shall be undertaken as part of the EM&A procedures.                | To ensure proper control, all waste is removed from site areas as appropriate and illegal disposal of waste is not being undertaken | All areas / throughout construction period | Contractor           | EIAO TM  |                       | Y |   | ^      |

| Remarks: EM&A Programme under EP-451/2013 |  |
|---|--|
| D   | Design   |
| C   | Construction   |
| Y   | Yes  |
| O   | Operation  |
| ^   | Compliance of mitigation measure;  |
| N/A                                       | Not applicable at this stage;  |
| N/A(1)                                    | Not observed;  |
| *   | Recommendation was made during site audit but improved/retified by the contractor;         |
| #   | Recommendation was made during site audit but not yet improved/retified by the contractor; |
| X   | Non-compliance of mitigation measure;  |
| ●   | Non-compliance but rectified by the contractor.  |

---

**APPENDIX L**  
**SUMMARIES OF ENVIRONMENTAL**  
**COMPLAINT, WARNING, SUMMON**  
**AND NOTIFICATION OF SUCCESSFUL**  
**PROSECUTION**

---

**Environmental Permit No.: EP-451/2013**  
**Environmental Team for Trunk Road T2**

**Appendix L – Summary of environmental complaint, warning, summon and notification of successful prosecution**

**Reporting Month:** July 2025

**Table L1 Summary of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution Received in the Reporting Period**

| Log Ref. | Location            | Received Date | Details of Complaint/warning/summon and prosecution  | Investigation/Mitigation Action   | Status |
|----------|---------------------|---------------|--|---|--------|
| W06      | The Launching Shaft | 31 July 2025  | A complaint regarding muddy water discharged into the “Kai Tak River” through an outfall near Children’s Hospital. | <ul style="list-style-type: none"> <li>There is no direct evidence that the suspected muddy water was discharged from T2 construction site.</li> <li>The following recommendations are made to contractor to further enhance the mitigation measures:               <ol style="list-style-type: none"> <li>1. Wheel washing bay would keep cleaning regularly to maintain the wheel washing performance;</li> <li>2. Wastewater from STP &amp; LSCC would be collected and pumped to WetSep of STP;</li> <li>3. The walkway and stockpile would keep covering after ducting work every day;</li> <li>4. Conduct regular maintenance for wastewater treatment facilities to maintain the quality of effluent;</li> <li>5. Conduct regular water quality monitoring.</li> </ol> </li> </ul> | Closed |

**Remarks:**

One (1) environmental complaint was received in the reporting period.

No environmental warning/summon and prosecution were received in the reporting period.

**Environmental Permit No.: EP-451/2013**  
**Environmental Team for Trunk Road T2**

**Appendix L – Summary of environmental complaint, warning, summon and notification of successful prosecution**

**Table L2 Cumulative Log for Environmental Complaint, Warning, Summon and Notification of Successful Prosecution**

| <b>Log Ref.</b> | <b>Location</b>     | <b>Received Date</b> | <b>Details of Complaint/warning/summon and prosecution</b>   | <b>Investigation/Mitigation Action</b>  | <b>Nature</b> | <b>Status</b> |
|-----------------|---------------------|----------------------|--|---|---------------|---------------|
| #A01            | The Launching Shaft | 24 June 2020         | A complaint regarding dust nuisance possible caused by the construction works at the Launching Shaft area was received.                | <ul style="list-style-type: none"> <li>- Training regarding the loading and unloading height control was provided to the labourers to ensure dusty materials are transported under a minimum practical height.</li> <li>- Water sprays system was installed around the location of complaint to prevent dust generated from wind erosion on the stockpile.</li> <li>- Contractor was reminded to further enhance the dust mitigation measures to minimize the dust nuisance.</li> </ul> | Air           | Closed        |
| #N01            | The Launching Shaft | 03 & 13 July 2020    | The verbal complaint regarding the noise nuisance generated from D-wall cutter operation nearby the PWCL building was received by CEDD | <ul style="list-style-type: none"> <li>- Noise barrier was erected between noise source and the PWCL building.</li> <li>- Construction programme was reviewed as to minimize operation of PME nearby the PWCL building</li> <li>- Contractor was recommended to implement the noise mitigation measures and other good site practices to minimize the noise nuisance.</li> </ul>  | Noise         | Closed        |



**Environmental Permit No.: EP-451/2013**  
**Environmental Team for Trunk Road T2**

**Appendix L – Summary of environmental complaint, warning, summon and notification of successful prosecution**

| <b>Log Ref.</b> | <b>Location</b>                   | <b>Received Date</b> | <b>Details of Complaint/warning/summon and prosecution</b>   | <b>Investigation/Mitigation Action</b>  | <b>Nature</b> | <b>Status</b> |
|-----------------|-----------------------------------|----------------------|--|---|---------------|---------------|
| #N03            | The Launching Shaft               | 03 December 2020     | A verbal complaint regarding the noise nuisance, generated from the construction works nearby PWCL building, was received by CEDD. | <ul style="list-style-type: none"> <li>- Contractor has taken the remedial action (i.e. Some of the breakers in which were operated nearby the concerned area were wrapped up with the acoustic insulation sheets) and noise mitigation measures (i.e. Noise barrier was installed adjoining the building to minimize the influence of construction noise, maintenance for all Powered Mechanical Equipment was conducted regularly, review on the construction programme to minimize the operations of PMEs near the PWCL) to minimize the noise impact generated from breaking activities.</li> </ul> | Noise         | Closed        |
| #N10            | Launching Shaft and Barging Point | 28 February 2023     | A Complaint of Noise Nuisance caused by the nighttime construction activities was received.  | <ul style="list-style-type: none"> <li>– The cause of the noise nuisance may cause by the operation of Derrick Barge and the Conveyors.</li> <li>– No limit level exceedance was recorded for additional noise monitoring and the weekly construction noise monitoring.</li> <li>– In addition, the Contractor shall review the construction schedule, priorities the work sequence and maintain good site</li> </ul>   | Noise         | Closed        |

**Environmental Permit No.: EP-451/2013**  
**Environmental Team for Trunk Road T2**

**Appendix L – Summary of environmental complaint, warning, summon and notification of successful prosecution**

| Log Ref. | Location            | Received Date | Details of Complaint/warning/summon and prosecution   | Investigation/Mitigation Action  | Nature | Status |
|----------|---------------------|---------------|---|--|--------|--------|
|          |                     |               |   | practices, such as erecting noise barrier as close as possible to the noise source, replace damaged semi-enclosure/noise barrier and provide regularly maintenance for PMEs.   |        |        |
|          |                     | 7 March 2023  | Follow up complaint from the same complainant was received and he/she informed that the construction noise nuisance at 09:50pm. | <ul style="list-style-type: none"> <li>– The cause of the noise nuisance may cause by the operation of Derrick Barge and the Conveyors.</li> <li>– No limit level exceedance was recorded for additional noise monitoring and the weekly construction noise monitoring.</li> <li>– In addition, the Contractor shall review the construction schedule, priorities the work sequence and maintain good site practices, such as erecting noise barrier as close as possible to the noise source, replace damaged semi-enclosure/noise barrier and provide regularly maintenance for PMEs.</li> </ul> | Noise  | Closed |
| #W01     | Launching Shaft and | 13 March 2023 | A complaint regarding to the silt/dirt being swept  | <ul style="list-style-type: none"> <li>– There is no direct evidence that the Silt/ Dirt being swept into the sea from the barge of T2.</li> </ul>   |        | Closed |

**Environmental Permit No.: EP-451/2013**  
**Environmental Team for Trunk Road T2**

**Appendix L – Summary of environmental complaint, warning, summon and notification of successful prosecution**

| <b>Log Ref.</b> | <b>Location</b>  | <b>Received Date</b> | <b>Details of Complaint/warning/summon and prosecution</b>   | <b>Investigation/Mitigation Action</b>  | <b>Nature</b> | <b>Status</b> |
|-----------------|--|----------------------|--|---|---------------|---------------|
|                 | Barging Point  |                      | into the sea from the operation of barge under Trunk Road T2.  | <ul style="list-style-type: none"> <li>– The following recommendations are made to further enhance the mitigation measures:</li> <li>– Provide regular training to site personnel on proper waste management and appropriate handling procedures.</li> <li>– Provide sufficient waste disposal points and regular collection for disposal.</li> <li>– Closely monitor the barge operation.</li> <li>– The Contractor has implemented the above environmental mitigation measures (As mentioned in Section 2.6) on site to ensure that no silt and household waste being swept into any water body.</li> </ul> | Water         |               |
| #N12            | Launching Shaft Area, Barging Point, Cheung Yip Street | 17 November 2023     | A verbal complaint regarding the noise nuisance, generated from the construction works near Cheung Yip Street after 21:00. | <ul style="list-style-type: none"> <li>– The cleaning work using the water jetting unit may be the cause of noise nuisance.</li> <li>– No limit level exceedance was recorded for additional noise monitoring and the weekly construction noise monitoring.</li> <li>– In addition, the Contractor shall review the construction schedule, priorities the</li> </ul>  | Noise         | Closed        |

**Environmental Permit No.: EP-451/2013**  
**Environmental Team for Trunk Road T2**

**Appendix L – Summary of environmental complaint, warning, summon and notification of successful prosecution**

| <b>Log Ref.</b> | <b>Location</b>      | <b>Received Date</b> | <b>Details of Complaint/warning/summon and prosecution</b>                            | <b>Investigation/Mitigation Action</b>   | <b>Nature</b> | <b>Status</b> |
|-----------------|----------------------|----------------------|---|--|---------------|---------------|
|                 |                      |                      |   | work sequence and maintain good site practices, such as erecting noise barrier as close as possible to the noise source, replace damaged semi-enclosure/noise barrier and provide regularly maintenance for PMEs.  |               |               |
| #W02            | Launching Shaft Area | 22 November 2023     | A complaint regarding to the number of fish die-off at the Kwun Tong Typhoon Shelter. | <ul style="list-style-type: none"> <li>– There is no direct evidence that the dead fish floating near the Kwun Tong Pier were caused by the construction activities.</li> <li>– The following recommendations are made to contractor to further enhance the mitigation measures:</li> <li>– 1) Conduct regular maintenance for wastewater treatment facilities to maintain the quality of effluent.</li> <li>– 2) Conduct regular water quality monitoring</li> <li>– 3) Carry out regular visual inspection to the Kai Tak Approach Channel (near the outfall of discharge point) to prevent illegal discharge of untreated water.</li> </ul> | Water         | Closed        |

**Environmental Permit No.: EP-451/2013**  
**Environmental Team for Trunk Road T2**

**Appendix L – Summary of environmental complaint, warning, summon and notification of successful prosecution**

| Log Ref. | Location   | Received Date | Details of Complaint/warning/summon and prosecution  | Investigation/Mitigation Action   | Nature | Status |
|----------|------------|---------------|--|---|--------|--------|
| #N13     | Portion Q1 | 23 April 2024 | A verbal complaint regarding the noise nuisance, generated from the construction works nearby the Wai Lok Street building at 10:20 pm, was received by EPD | <ul style="list-style-type: none"> <li>– The complaint is considered as project-related.</li> <li>– Despite the lifting operation being carried out at the site during the night, the contractor was in possession of a valid construction noise permit (GW-RE0328-24). All construction activities were performed in accordance with legal regulations, and no violations of the law were found.</li> <li>– In addition, the Contractor shall review the construction schedule, priorities the work sequence and maintain good site practices, such as erecting noise barrier as close as possible to the noise source, replace damaged semi enclosure/noise barrier and provide regularly maintenance for PMEs.</li> <li>– As the complaint was considered as project related, the contractor had implemented the relevant mitigation measures to minimize the noise impact including:1) Conduct regular noise monitoring.2) Conduct regular</li> </ul> | Noise  | Closed |

**Environmental Permit No.: EP-451/2013**  
**Environmental Team for Trunk Road T2**

**Appendix L – Summary of environmental complaint, warning, summon and notification of successful prosecution**

| Log Ref. | Location             | Received Date | Details of Complaint/warning/summon and prosecution                                     | Investigation/Mitigation Action   | Nature | Status |
|----------|----------------------|---------------|---|---|--------|--------|
|          |                      |               |   | <p>maintenance for all Powered Mechanical Equipment to minimize the noise generated from engines.</p> <ul style="list-style-type: none"> <li>– Displayed the CNP at the gates of Portion Q.</li> </ul>  |        |        |
| #W03     | Launching Shaft Area | 23 July 2024  | <p>A complaint regarding wastewater discharge at an outlet near Children's Hospital</p> | <ul style="list-style-type: none"> <li>– There is no direct evidence that the discharged yellowish wastewater was caused by the construction activities.</li> <li>– The following recommendations are made to contractor to further enhance the mitigation measures:</li> <li>– 1) Conduct regular maintenance for wastewater treatment facilities to maintain the quality of effluent.</li> <li>– 2) Conduct regular water quality monitoring.</li> <li>– 3) Carry out regular visual inspection to the Kai Tak Approach Channel (near the outfall of discharge point) to prevent illegal discharge of untreated water.</li> </ul> | Water  | Closed |

**Environmental Permit No.: EP-451/2013**  
**Environmental Team for Trunk Road T2**

**Appendix L – Summary of environmental complaint, warning, summon and notification of successful prosecution**

| Log Ref. | Location             | Received Date     | Details of Complaint/warning/summon and prosecution   | Investigation/Mitigation Action   | Nature | Status |
|----------|----------------------|-------------------|---|---|--------|--------|
| #A02     | Launching Shaft Area | 5 September 2024  | A complaint regarding dust nuisance, suspected to be caused by the construction works at the Launching Shaft area   | <ul style="list-style-type: none"> <li>– The dust emission was related to the bentonite refilling activities.</li> <li>– The following recommendations are made to contractor to further enhance the mitigation measures:</li> <li>– 1) Conduct regular maintenance for several plants which used for refilling work.</li> <li>– 2) Reduce the maximum capacity of silo to 85% of total volume to prevent recurrence.</li> </ul>  | Air    | Closed |
| #W04     | Launching Shaft Area | 24 September 2024 | A complaint regarding untreated water discharged into an unknown underground pipe inside the site via a blue plastic hose, muddy water also appeared at seafront of T2 site | <ul style="list-style-type: none"> <li>– There is no direct evidence that the muddy water at seafront of T2 site was caused by the construction activities.</li> <li>– The following recommendations are made to contractor to further enhance the mitigation measures:</li> <li>– 1) To avoid misleading, a water pump was directly connected from Cut &amp; Cover Shaft to the designated sump pit.</li> <li>– 2) Conduct regular maintenance for wastewater treatment facilities to maintain the quality of effluent.</li> </ul> | Water  | Closed |

**Environmental Permit No.: EP-451/2013**  
**Environmental Team for Trunk Road T2**

**Appendix L – Summary of environmental complaint, warning, summon and notification of successful prosecution**

| <b>Log Ref.</b> | <b>Location</b> | <b>Received Date</b> | <b>Details of Complaint/warning/summon and prosecution</b>                               | <b>Investigation/Mitigation Action</b>   | <b>Nature</b> | <b>Status</b> |
|-----------------|-----------------|----------------------|--|--|---------------|---------------|
|                 |                 |                      |  | <ul style="list-style-type: none"> <li>– 3) Conduct regular water quality monitoring.</li> <li>– 4) Carry out regular visual inspection to the Kai Tak Approach Channel (near the outfall of discharge point) to prevent illegal discharge of untreated water</li> </ul>   |               |               |
| #L02            | Portion Q1      | 9 May 2025           | A complaint regarding light nuisance and dark smoke from barges berthed near Laguna City | <ul style="list-style-type: none"> <li>– There was no direct evidence that any dark smoke was emitted while the barge is operating.</li> <li>– The following recommendations are made to contractor to further enhance the mitigation measures:</li> <li>– 1) Conduct regular monitoring for smoke emission.</li> <li>– 2) Turn off unnecessary lighting and adjust the angle of lighting to reduce light nuisance to public.</li> <li>– 3) Use Low Sulfur Diesel for the barge</li> <li>– 4) Conduct regular toolbox training</li> <li>– 5) Conduct regular maintenance for all Powered Mechanical Equipment to prevent dark smoke emission.</li> </ul> | Light & Air   | Closed        |



**Environmental Permit No.: EP-451/2013**  
**Environmental Team for Trunk Road T2**

**Appendix L – Summary of environmental complaint, warning, summon and notification of successful prosecution**

| Log Ref. | Location        | Received Date | Details of Complaint/warning/summon and prosecution   | Investigation/Mitigation Action   | Nature | Status |
|----------|-----------------|---------------|---|---|--------|--------|
| #W05     | Lam Chak Street | 10 June 2025  | An anonymous complaint regarding muddy water flew out and hygiene problem caused by dump truck in/out at Lam Chak Street. | <ul style="list-style-type: none"> <li>– There is no direct evidence that the suspected muddy water was discharged from T2 construction site at Lam Chak Street.</li> <li>– The following recommendations are made to contractor to further enhance the mitigation measures:</li> <li>– 1) Wash out the yellowish water ponded next to site entrance;</li> <li>– 2) Follow up the yellowish water leakage from the site boundary;</li> <li>– 3) Conduct regular maintenance for wastewater treatment facilities to maintain the quality of effluent;</li> <li>– 4) Conduct regular water quality monitoring.</li> </ul> | Water  | Closed |

**Environmental Permit No.: EP-451/2013**  
**Environmental Team for Trunk Road T2**

**Appendix L – Summary of environmental complaint, warning, summon and notification of successful prosecution**

| <b>Log Ref.</b> | <b>Location</b>      | <b>Received Date</b> | <b>Details of Complaint/warning/summon and prosecution</b>   | <b>Investigation/Mitigation Action</b>  | <b>Nature</b> | <b>Status</b> |
|-----------------|----------------------|----------------------|--|---|---------------|---------------|
| #W06            | Launching Shaft Area | 31 July 2025         | A complaint regarding muddy water discharged into the “Kai Tak River” through an outfall near Children’s Hospital. | <ul style="list-style-type: none"> <li>– There is no direct evidence that the suspected muddy water was discharged from T2 construction site.</li> <li>– The following recommendations are made to contractor to further enhance the mitigation measures:               <ol style="list-style-type: none"> <li>1) Wheel washing bay would keep cleaning regularly to maintain the wheel washing performance;</li> <li>2) Wastewater from STP &amp; LSCC would be collected and pumped to WetSep of STP;</li> <li>3) The walkway and stockpile would keep covering after ducting work every day;</li> <li>4) Conduct regular maintenance for wastewater treatment facilities to maintain the quality of effluent;</li> <li>5) Conduct regular water quality monitoring.</li> </ol> </li> </ul> | Water         | Closed        |

---

---

**APPENDIX M**  
**SUMMARY OF EXCEEDANCE**

---

---

**Environmental Permit No.: EP-451/2013**  
**Environmental Team for Trunk Road T2**

**Appendix M – Summary of Exceedance**

**Reporting Month:** July 2025

**(A) Exceedance Report for Air Quality**

No Action Level and No Limit Level exceedance of 24-hr TSP monitoring was recorded in this reporting month.

No Action Level and No Limit Level exceedance of 1-hr TSP monitoring was recorded in this reporting month.

**(B) Exceedance Report for Construction Noise**

**Action Level for Construction Noise**

No Action Level exceedance was recorded due to no documented complaint received in this reporting month.

**Limit Level for Construction Noise**

No exceedance for daytime construction noise monitoring was recorded in the reporting month.

**(C) Summary of Landscape and Visual Non-Conformity**

(NIL in the reporting month)

---

**APPENDIX N**  
**TENTATIVE CONSTRUCTION**  
**PROGRAMME**

---

| Activity ID  | Activity Name  | Dur | Start       | Finish    | 2025   |     |     |
|--|--|-----|-------------|-----------|--|-----|-----|
|  |  |     |             |           | Jul  | Aug | Sep |
| HKT2 Pre-P80 Programme DD 01Jul25  |  | 761 | 20-Nov-23 A | 20-Dec-25 |  |     |     |
| Construction   |  | 761 | 20-Nov-23 A | 20-Dec-25 |  |     |     |
| Trunk Road T2  |  | 761 | 20-Nov-23 A | 20-Dec-25 |  |     |     |
| 02 AtGrade Road -AGR   |  | 501 | 15-Jun-24 A | 28-Oct-25 |  |     |     |
| Kiosk  |  | 120 | 01-Jul-25   | 28-Oct-25 |  |     |     |
| AGR 1030   | Kiosk - procurement, fabrication & delivery                                    | 90  | 01-Jul-25*  | 28-Sep-25 | Kiosk - procurement, fabrication & delivery                                    |     |     |
| AGR 1060   | Kiosk - Civil  | 30  | 29-Sep-25   | 28-Oct-25 | Kiosk - Civil  |     |     |
| AGR - Road & Drainage works  |  | 400 | 15-Jun-24 A | 20-Jul-25 |  |     |     |
| AGR 1021   | AGR - TCSS Provision CH5860-5962   | 148 | 09-Jan-25 A | 12-Jul-25 | AGR - TCSS Provision CH5860-5962   |     |     |
| AGR 1150   | AGR - Central Barrier (subject to CKR interface and TBM haul road arrangement) | 12  | 08-Jul-25   | 20-Jul-25 | AGR - Central Barrier (subject to CKR interface and TBM haul road arrangement) |     |     |
| Eastbound  |  | 165 | 07-Dec-24 A | 04-Jul-25 |  |     |     |
| AGR1040  | AGR - EB Drainage & Gully Installation   | 165 | 07-Dec-24 A | 04-Jul-25 | AGR - EB Drainage & Gully Installation   |     |     |
| Westbound  |  | 400 | 15-Jun-24 A | 20-Jul-25 |  |     |     |
| AGR 1020   | AGR - WB Drainage & Gully Installation   | 310 | 15-Jun-24 A | 02-Jul-25 | AGR - WB Drainage & Gully Installation   |     |     |
| AGR 1050   | AGR - WB Road Side Barrier   | 155 | 15-Feb-25 A | 20-Jul-25 | AGR - WB Road Side Barrier   |     |     |
| AGR 1140   | AGR - WB Subbase (subject to CKR interface and TBM haul road arrangement)      | 98  | 06-Mar-25 A | 08-Jul-25 | AGR - WB Subbase (subject to CKR interface and TBM haul road arrangement)      |     |     |
| 03 Depressed Road - DPR  |  | 135 | 16-Jun-25 A | 28-Oct-25 |  |     |     |
| DPR - Road Works   |  | 135 | 16-Jun-25 A | 28-Oct-25 |  |     |     |
| Temporary Ramp for CKR Opening   |  | 60  | 01-Jul-25   | 29-Aug-25 |  |     |     |
| A229450370   | AGR & DPR - Traffic diversion  | 15  | 01-Jul-25   | 15-Jul-25 | AGR & DPR - Traffic diversion  |     |     |
| A229450510   | DPR - WB Ramp demolition   | 15  | 16-Jul-25   | 30-Jul-25 | DPR - WB Ramp demolition   |     |     |
| A229450530   | DPR - Remaining Road Works   | 30  | 31-Jul-25   | 29-Aug-25 | DPR - Remaining Road Works   |     |     |
| Rising Main  |  | 135 | 16-Jun-25 A | 28-Oct-25 |  |     |     |
| A229450070   | DPR - Civil - temp drainage system modification                                | 45  | 16-Jun-25 A | 30-Jul-25 | DPR - Civil - temp drainage system modification                                |     |     |
| A229450170   | DPR - Civil - Perm civil provision   | 30  | 31-Jul-25   | 29-Aug-25 | DPR - Civil - Perm civil provision   |     |     |
| A229426391   | DPR - E&M - Sump pit pumps and watermain installation                          | 60  | 30-Aug-25   | 28-Oct-25 | DPR - E&M - Sump pit pumps and watermain installation                          |     |     |
| DPR - Final Works  |  | 36  | 02-Jul-25   | 12-Aug-25 |  |     |     |
| 05 Supporting Underground Structure - SUS  |  | 84  | 18-Jun-25 A | 09-Sep-25 |  |     |     |
| SUS - Tunnel Civil Works   |  | 84  | 18-Jun-25 A | 09-Sep-25 |  |     |     |
| A229450430   | Parapet Defect Rectification (EB CP side)                                      | 32  | 18-Jun-25 A | 19-Jul-25 | Parapet Defect Rectification (EB CP side)                                      |     |     |
| A229450470   | SUS VE Panel Design Review (EB)  | 47  | 30-Jun-25 A | 15-Aug-25 | SUS VE Panel Design Review (EB)  |     |     |
| A229450490   | SUS VE Panel Design Review (WB)  | 58  | 30-Jun-25 A | 27-Aug-25 | SUS VE Panel Design Review (WB)  |     |     |
| A229450440   | Parapet Defect Rectification (EB NCP side)                                     | 24  | 20-Jul-25   | 12-Aug-25 | Parapet Defect Rectification (EB NCP side)                                     |     |     |
| A229450450   | Parapet Defect Rectification (WB CP side) (Design TBC)                         | 14  | 13-Aug-25   | 26-Aug-25 | Parapet Defect Rectification (WB CP side) (Design TBC)                         |     |     |
| A229450460   | Parapet Defect Rectification (WB NCP side) (Design TBC)                        | 14  | 27-Aug-25   | 09-Sep-25 | Parapet Defect Rectification (WB NCP side) (Design TBC)                        |     |     |
| Eastbound TCW  |  | 14  | 01-Jul-25   | 14-Jul-25 |  |     |     |
| EB Road Barrier  |  | 14  | 01-Jul-25   | 14-Jul-25 |  |     |     |
| SUS10060   | SUS EB - Road Barrier (CPS) Last 50m   | 14  | 01-Jul-25   | 14-Jul-25 | SUS EB - Road Barrier (CPS) Last 50m   |     |     |
| Westbound TCW  |  | 14  | 01-Jul-25   | 14-Jul-25 |  |     |     |
| WB Road Barrier  |  | 14  | 01-Jul-25   | 14-Jul-25 |  |     |     |
| SUS10210   | SUS WB - Road Barrier (CPS) Last 50m   | 14  | 01-Jul-25   | 14-Jul-25 | SUS WB - Road Barrier (CPS) Last 50m   |     |     |
| 06 Launching Shaft & C&C Tunnel - LSCC   |  | 702 | 20-Nov-23 A | 21-Oct-25 |  |     |     |
| LSCC - Structure works   |  | 133 | 15-Apr-25 A | 25-Aug-25 |  |     |     |
| Launching Shaft  |  | 133 | 15-Apr-25 A | 25-Aug-25 |  |     |     |
| Late Stitch/C&C  |  | 91  | 15-Apr-25 A | 14-Jul-25 |  |     |     |
| LSCC10401  | 9a. Late Stitch/C&C - Remaining Base Slab                                      | 91  | 15-Apr-25 A | 14-Jul-25 | 9a. Late Stitch/C&C - Remaining Base Slab                                      |     |     |
| LS - Miscellaneous Structural Openings   |  | 56  | 01-Jul-25   | 25-Aug-25 |  |     |     |
| 01 Massfill at cable trench (subject to temporary cable relocation)                |  | 14  | 12-Aug-25   | 25-Aug-25 |  |     |     |
| A229448630   | Clearance and Massfill the trench  | 14  | 12-Aug-25   | 25-Aug-25 | Clearance and Massfill the trench  |     |     |
| 02 Road slab opening & Drainage works (subject to temporary cable relocation)      |  | 42  | 01-Jul-25   | 11-Aug-25 |  |     |     |
| A229448640   | RC Slab, Manhole, drainage pipe construction and massfill                      | 42  | 01-Jul-25   | 11-Aug-25 | RC Slab, Manhole, drainage pipe construction and massfill                      |     |     |
| 04 In situ SG at LS/TSS connection (subject to temporary works to maintain tunnel) |  | 31  | 01-Jul-25   | 31-Jul-25 |  |     |     |
| A229448570   | EB & WB in situ Service Gallery CPS - Part 1                                   | 7   | 01-Jul-25   | 07-Jul-25 | EB & WB in situ Service Gallery CPS - Part 1                                   |     |     |
| A229448580   | EB & WB in situ Service Gallery CPS - Part 2                                   | 7   | 08-Jul-25   | 14-Jul-25 | EB & WB in situ Service Gallery CPS - Part 2                                   |     |     |

| Activity ID  |  | Activity Name   | Dur         | Start       | Finish   | 2025   |     |     |
|--|--|---|-------------|-------------|--|--|-----|-----|
|  |  |   |             |             |  | Jul  | Aug | Sep |
| 05 RC works at MMEP Opening for Service Galleries Works (subject to BYME 8 | A229448581   | Road Diversion  | 3           | 15-Jul-25   | 17-Jul-25  | Road Diversion   |     |     |
|  | A229448590   | EB & WB in situ Service Gallery NCPS - Part 1                       | 7           | 18-Jul-25   | 24-Jul-25  | EB & WB in situ Service Gallery NCPS - Part 1                            |     |     |
|  | A229448600   | EB & WB in situ Service Gallery NCPS - Part 2                       | 7           | 25-Jul-25   | 31-Jul-25  | EB & WB in situ Service Gallery NCPS - Part 2                            |     |     |
|  | 05 RC works at MMEP Opening for Service Galleries Works (subject to BYME 8   |   | 49          | 01-Jul-25   | 18-Aug-25  |  |     |     |
|  | A229448650   | Stage 1 - Narrow the opening to 3.5m*2m RC works                    | 28          | 01-Jul-25*  | 28-Jul-25  | Stage 1 - Narrow the opening to 3.5m*2m RC works                         |     |     |
|  | A229448660   | Stage 2 - Closing out the opening (after SG installation completion | 14          | 01-Jul-25*  | 14-Jul-25  | Stage 2 - Closing out the opening (after SG installation completion TBC) |     |     |
|  | A229449020   | Stage 1a - Emergency staircase corridor RC works                    | 21          | 29-Jul-25   | 18-Aug-25  | Stage 1a - Emergency staircase corridor RC works                         |     |     |
|  | LSCC - Backfilling & Dwall Dismantling                                       |   | 113         | 01-Jul-25   | 21-Oct-25  |  |     |     |
|  | LSCC - Tunnel Civil Works  |   | 647         | 20-Nov-23 A | 28-Aug-25  |  |     |     |
|  | Eastbound TCW  |   | 647         | 20-Nov-23 A | 28-Aug-25  |  |     |     |
|  | LSCC10070  | LSCC EB - Fireboard   | 589         | 20-Nov-23 A | 01-Jul-25  | LSCC EB - Fireboard  |     |     |
|  | LSCC10090  | LSCC EB - E&M brackets (CPS)  | 312         | 06-Sep-24 A | 15-Jul-25  | LSCC EB - E&M brackets (CPS)   |     |     |
|  | LSCC10421  | LSCC EB - E&M brackets (NCPS)                                       | 312         | 20-Sep-24 A | 29-Jul-25  | LSCC EB - E&M brackets (NCPS)  |     |     |
|  | LSCC10050  | LSCC EB - Road Barrier (NCPS)                                       | 61          | 13-Jun-25 A | 13-Aug-25  | LSCC EB - Road Barrier (NCPS)  |     |     |
|  | LSCC10110  | LSCC EB - TCSS provision  | 6           | 15-Jul-25   | 21-Jul-25  | LSCC EB - TCSS provision   |     |     |
|  | LSCC10431  | LSCC EB - Road Barrier (CPS)  | 15          | 13-Aug-25*  | 28-Aug-25  | LSCC EB - Road Barrier (CPS)   |     |     |
|  | Westbound TCW  |   | 409         | 13-Jul-24 A | 26-Aug-25  |  |     |     |
|  | LSCC10080  | LSCC WB - E&M brackets (CPS)  | 367         | 13-Jul-24 A | 15-Jul-25  | LSCC WB - E&M brackets (CPS)   |     |     |
|  | LSCC10060  | LSCC WB - Fireboard   | 255         | 19-Oct-24 A | 01-Jul-25  | LSCC WB - Fireboard  |     |     |
|  | LSCC10411  | LSCC WB - E&M brackets (NCPS)                                       | 278         | 24-Oct-24 A | 29-Jul-25  | LSCC WB - E&M brackets (NCPS)  |     |     |
|  | LSCC10441  | LSCC WB - Road Barrier (NCPS)                                       | 74          | 30-May-25 A | 12-Aug-25  | LSCC WB - Road Barrier (NCPS)  |     |     |
|  | LSCC10100  | LSCC WB - TCSS provision  | 6           | 15-Jul-25   | 21-Jul-25  | LSCC WB - TCSS provision   |     |     |
|  | LSCC10451  | LSCC WB - Road Barrier (CPS)  | 14          | 12-Aug-25   | 26-Aug-25  | LSCC WB - Road Barrier (CPS)   |     |     |
|  | 07 Tunnel Sub-sea (TSS)  |   | 711         | 26-Nov-23 A | 05-Nov-25  |  |     |     |
|  | Additional Excavation by D&Br from CKL                                       |   | 329         | 15-Aug-24 A | 09-Jul-25  |  |     |     |
|  | Eastbound Pilot Tunnel   |   | 329         | 15-Aug-24 A | 09-Jul-25  |  |     |     |
|  | CKL1130  | EB CKL - Pilot tunnel enlargement (Benching)                        | 329         | 15-Aug-24 A | 09-Jul-25  | EB CKL - Pilot tunnel enlargement (Benching)                             |     |     |
|  | TSS - TBM Excavation from Kai Tak  |   | 634         | 11-Feb-24 A | 05-Nov-25  |  |     |     |
|  | Westbound - TBM S1281  |   | 163         | 27-May-25 A | 05-Nov-25  |  |     |     |
|  | TBM1 Tunneling   |   | 96          | 27-May-25 A | 30-Aug-25  |  |     |     |
| CP26-31  |  | 96  | 27-May-25 A | 30-Aug-25   |  |  |     |     |
| A229450300   | WB TBM Tunnelling CH8900-8975 (Pilot tunnel section) (75m; 7.0R/wk, 15% TRA) | 37  | 27-May-25 A | 03-Jul-25 A | WB TBM Tunnelling CH8900-8975 (Pilot tunnel section) (75m; 7.0R/wk, 15% TRA) |  |     |     |
| A229449564   | WB TBM Tunnelling CH8975-9068 (Pilot tunnel section) (93m 7.0F               | 35  | 03-Jul-25 A | 06-Aug-25   | WB TBM Tunnelling CH8975-9068 (Pilot tunnel section) (93m 7.0R/wk, 15% TRA)  |  |     |     |
| A229449565   | WB TBM Tunnelling CH9068-9137 (cavern) (69m; 9.3R/wk, 10% T                  | 24  | 06-Aug-25   | 30-Aug-25   | WB TBM Tunnelling CH9068-9137 (cavern) (69m; 9.3R/wk, 10% TRA)               |  |     |     |
| TBM1 Dismantling   |  | 67  | 30-Aug-25   | 05-Nov-25   |  |  |     |     |
| General  |  | 67  | 30-Aug-25   | 05-Nov-25   |  |  |     |     |
| TA525  | WB TBM - Last 5 Rings Installation   | 2   | 30-Aug-25   | 01-Sep-25   | WB TBM - Last 5 Rings Installation   |  |     |     |
| TA85   | WB TBM dismantling - TSS side  | 67  | 30-Aug-25   | 05-Nov-25   | WB TBM dismantling - TSS side  |  |     |     |
| TA70   | WB TBM Cutterhead Cleaning   | 5   | 01-Sep-25   | 06-Sep-25   | WB TBM Cutterhead Cleaning   |  |     |     |
| TA325  | WB TBM dismantling - CKL side  | 60  | 06-Sep-25   | 05-Nov-25   | WB TBM dismantling - CKL side  |  |     |     |
| TSS side   |  | 34  | 01-Sep-25   | 05-Oct-25   |  |  |     |     |
| Gantries   |  | 33  | 01-Sep-25   | 04-Oct-25   |  |  |     |     |
| TA526  | WB TBM dismantling - QU + Walkways   | 2   | 01-Sep-25   | 03-Sep-25   | WB TBM dismantling - QU + Walkways   |  |     |     |
| TA536  | WB TBM dismantling - MD Rings to front + SF                                  | 1   | 03-Sep-25   | 04-Sep-25   | WB TBM dismantling - MD Rings to front + SF                                  |  |     |     |
| TA135  | WB TBM dismantling - Gantry 4 Level 3, 2 & 1 dismantling                     | 7   | 04-Sep-25   | 11-Sep-25   | WB TBM dismantling - Gantry 4 Level 3, 2 & 1 dismantling                     |  |     |     |
| TA115  | WB TBM dismantling - Gantry 1-3 pulling (free up 1st 50m)                    | 1   | 12-Sep-25   | 13-Sep-25   | WB TBM dismantling - Gantry 1-3 pulling (free up 1st 50m)                    |  |     |     |
| TA275  | WB TBM dismantling - Gantry 1-3 Level 3 Dismantling                          | 7   | 13-Sep-25   | 20-Sep-25   | WB TBM dismantling - Gantry 1-3 Level 3 Dismantling                          |  |     |     |
| TA921  | WB TBM dismantling - Gantry 1-3 Level 2 Dismantling                          | 7   | 20-Sep-25   | 27-Sep-25   | WB TBM dismantling - Gantry 1-3 Level 2 Dismantling                          |  |     |     |
| TA931  | WB TBM dismantling - Gantry 1-3 Level 1 Dismantling                          | 7   | 27-Sep-25   | 04-Oct-25   | WB TBM dismantling - Gantry 1-3 Level 1 Dismantling                          |  |     |     |
| Erector,Cross Beam,MD  |  | 22  | 13-Sep-25   | 05-Oct-25   |  |  |     |     |
| TA185  | WB TBM dismantling - Concreting  | 5   | 13-Sep-25   | 18-Sep-25   | WB TBM dismantling - Concreting  |  |     |     |
| TA195  | WB TBM dismantling - Rail Installation                                       | 4   | 18-Sep-25   | 22-Sep-25   | WB TBM dismantling - Rail Installation                                       |  |     |     |
| TA205  | WB TBM dismantling - Erector Support installation + pulling                  | 4   | 22-Sep-25   | 26-Sep-25   | WB TBM dismantling - Erector Support installation + pulling                  |  |     |     |
| TA225  | WB TBM dismantling - Cross Beam Extraction                                   | 2   | 26-Sep-25   | 28-Sep-25   | WB TBM dismantling - Cross Beam Extraction                                   |  |     |     |



| Activity ID |  | Activity Name  | Dur   | Start       | Finish      | 2025        |   |                                       |
|-------------|--|--|---|-------------|-------------|-------------|---|---------------------------------------|
|             |  |  |   |             |             | Jul         | Aug   | Sep                                   |
|             |  | TA216  | WB TBM dismantling - Erector dismantling                        | 7           | 26-Sep-25   | 03-Oct-25   |   |                                       |
|             |  | TA245  | WB TBM dismantling - MD Extraction                              | 2           | 28-Sep-25   | 30-Sep-25   |   |                                       |
|             |  | TA236  | WB TBM dismantling - Cross Beam Wire Cutting                    | 7           | 28-Sep-25   | 05-Oct-25   |   |                                       |
|             |  | CKL Side   | 24  | 06-Sep-25   | 30-Sep-25   |             |   |                                       |
|             |  | Cutterhead, Bearing, Shield                                | 24  | 06-Sep-25   | 30-Sep-25   |             |   |                                       |
|             |  | TA90   | WB TBM dismantling - Cutterhead dismantling Part 1 + Rotation   | 6           | 06-Sep-25   | 12-Sep-25   |   | WB TBM dismantling - Cutterhead disma |
|             |  | TA901  | WB TBM dismantling - Cutterhead dismantling Part 2              | 14          | 12-Sep-25   | 26-Sep-25   |   | WB TB                                 |
|             |  | TA91   | WB TBM dismantling - Shield Cutting (before MD removal)         | 4           | 26-Sep-25   | 30-Sep-25   |   |                                       |
|             |  | Eastbound - TBM S1282                                      | 604   | 11-Feb-24 A | 06-Oct-25   |             |   |                                       |
|             |  | TBM2 Tunneling   | 604   | 11-Feb-24 A | 06-Oct-25   |             |   |                                       |
|             |  | CP21-26  | 507   | 11-Feb-24 A | 01-Jul-25   |             |   |                                       |
|             |  | EBTBM1250  | EB TBM stop   | 507         | 11-Feb-24 A | 01-Jul-25   | EB TBM stop   |                                       |
|             |  | CP26-30  | 97  | 02-Jul-25   | 06-Oct-25   |             |   |                                       |
|             |  | EBTBM1350  | EB TBM Tunnelling - Seawall Section 5 Rings CH8632-8654 (11m    | 10          | 02-Jul-25   | 11-Jul-25   | EB TBM Tunnelling - Seawall Section 5 Rings CH8632-8654 (11m; 3.6R/wk,as-built rate)    |                                       |
|             |  | EBTBM1300  | TRA: Stoppage 1 before Full Face Rock                           | 18          | 12-Jul-25   | 29-Jul-25   | TRA: Stoppage 1 before Full Face Rock   |                                       |
|             |  | EBTBM1360  | EB TBM Tunnelling - Seawall Section 5 Rings CH8632-8654 (11m    | 10          | 30-Jul-25   | 08-Aug-25   | EB TBM Tunnelling - Seawall Section 5 Rings CH8632-8654 (11m; 3.6R/wk,as-built rate)    |                                       |
|             |  | EBTBM1260  | EB TBM Tunnelling - Seawall Section up to Full Face Rock CH865  | 14          | 09-Aug-25   | 22-Aug-25   | EB TBM Tunnelling - Seawall Section up to Full Face Rock CH8654-8675 (21m; 4.8R/wk, 15% |                                       |
|             |  | EBTBM1530  | EB TBM Tunnelling - Seawall Section up to Full Face Rock CH867  | 15          | 23-Aug-25   | 06-Sep-25   | EB TBM Tunnelling - Seawall Section up to Full Face R                                   |                                       |
|             |  | EBTBM1270  | EB TBM Tunnelling - Seawall Section up to Full Face Rock CH869  | 14          | 07-Sep-25   | 20-Sep-25   | EB TBM Tunnelling -   |                                       |
|             |  | EBTBM1280  | EB TBM Tunnelling CH8718-8748 up to start of Pilot Tunnel (30m; | 16          | 21-Sep-25   | 06-Oct-25   |   |                                       |
|             |  | TSS - Tunnel Civil Works                                   | 685   | 26-Nov-23 A | 11-Oct-25   |             |   |                                       |
|             |  | Westbound (WB)   | 321   | 24-Nov-24 A | 11-Oct-25   |             |   |                                       |
|             |  | WB TSS - TBM Temporary Services                            | 28  | 06-Sep-25   | 04-Oct-25   |             |   |                                       |
|             |  | TBM slurry pipe relocation                                 | 7   | 11-Sep-25   | 18-Sep-25   |             |   |                                       |
|             |  | A229447540   | TSS - WB NCPS Wall Pipe Relocation from CP23 to CP24            | 7           | 11-Sep-25   | 18-Sep-25   |   | TSS - WB NCPS Wall Pipe               |
|             |  | TBM slurry pipe dismantling                                | 28  | 06-Sep-25   | 04-Oct-25   |             |   |                                       |
|             |  | A229447590   | TSS - WB NCPS Wall Pipe Dismantling from CP25 to CP29           | 14          | 06-Sep-25   | 20-Sep-25   |   | TSS - WB NCPS Wa                      |
|             |  | A229447610   | TSS - WB NCPS Wall Pipe Dismantling from FT to CP11             | 14          | 06-Sep-25   | 20-Sep-25   |   | TSS - WB NCPS Wa                      |
|             |  | A229447620   | TSS - WB NCPS Wall Pipe Dismantling from CP11 to CP16           | 14          | 20-Sep-25   | 04-Oct-25   |   |                                       |
|             |  | WB TSS - Service Gallery                                   | 103   | 26-May-25 A | 05-Sep-25   |             |   |                                       |
|             |  | CP26-31  | 103   | 26-May-25 A | 05-Sep-25   |             |   |                                       |
|             |  | A229446380   | WB TSS - Service Gallery up from CH8712 to 8786 (CP28)          | 36          | 26-May-25 A | 01-Jul-25   | WB TSS - Service Gallery up from CH8712 to 8786 (CP28)                                  |                                       |
|             |  | TC3010   | WB TSS - Service Gallery up from CH8786 to CH8897 (CP29)        | 5           | 06-Aug-25   | 11-Aug-25   | WB TSS - Service Gallery up from CH8786 to CH8897 (CP29)                                |                                       |
|             |  | Same Rate as TBM Excavation (Last SG 170m behind TBM CH)   | 102   | 27-May-25 A | 05-Sep-25   |             |   |                                       |
|             |  | A229450330   | WB TBM Tunnelling CH8900-8975 (Pilot tunnel section) (75m; 7.0l | 37          | 27-May-25 A | 03-Jul-25 A | WB TBM Tunnelling CH8900-8975 (Pilot tunnel section) (75m; 7.0R/wk, 15% TRA)            |                                       |
|             |  | A229450340   | WB TBM Tunnelling CH8975-9068 (Pilot tunnel section) (93m 7.0F  | 41          | 03-Jul-25 A | 12-Aug-25   | WB TBM Tunnelling CH8975-9068 (Pilot tunnel section) (93m 7.0R/wk, 15% TRA)             |                                       |
|             |  | A229450350   | WB TBM Tunnelling CH9068-9137 (cavern) (69m; 9.3R/wk, 10% T     | 24          | 13-Aug-25   | 05-Sep-25   | WB TBM Tunnelling CH9068-9137 (cavern) (69m; 9.3R/w                                     |                                       |
|             |  | WB TSS - Below Road Level Installation                     | 18  | 11-Aug-25   | 29-Aug-25   |             |   |                                       |
|             |  | Service Gallery Civil Provision                            | 18  | 11-Aug-25   | 29-Aug-25   |             |   |                                       |
|             |  | TC1100   | WB TSS - Service Gallery Civil Provision up to CP29             | 18          | 11-Aug-25   | 29-Aug-25   | WB TSS - Service Gallery Civil Provision up to CP29                                     |                                       |
|             |  | WB TSS - Corbel  | 88  | 02-Jul-25 A | 27-Sep-25   |             |   |                                       |
|             |  | CP21-26  | 55  | 02-Jul-25 A | 25-Aug-25   |             |   |                                       |
|             |  | A229450520   | WB TSS - Corbel Structure & Curing up to CH8780 before CP28     | 16          | 02-Jul-25 A | 17-Jul-25   | WB TSS - Corbel Structure & Curing up to CH8780 before CP28                             |                                       |
|             |  | A229424160   | WB TSS - Corbel Structure & Curing at CP28                      | 6           | 05-Aug-25   | 10-Aug-25   | WB TSS - Corbel Structure & Curing at CP28  |                                       |
|             |  | TC11200  | WB TSS - Corbel Structure & Curing up to CH8875                 | 15          | 11-Aug-25   | 25-Aug-25   | WB TSS - Corbel Structure & Curing up to CH8875   |                                       |
|             |  | CP26-31  | 4   | 17-Sep-25   | 20-Sep-25   |             |   |                                       |
|             |  | TC1930   | WB TSS - Corbel Structure up to CP29 (25m)                      | 4           | 17-Sep-25   | 20-Sep-25   |   | WB TSS - Corbel Str                   |
|             |  | Concrete curing time before ISSG arrival                   | 7   | 21-Sep-25   | 27-Sep-25   |             |   |                                       |
|             |  | TC1330   | WB TSS - Corbel Structure up to CP29 (concrete curing)          | 7           | 21-Sep-25   | 27-Sep-25   |   | WB                                    |
|             |  | WB TSS - OHVD  | 7   | 21-Jul-25   | 28-Jul-25   |             |   |                                       |
|             |  | TC11470  | WB TSS - OHVD from CH8530 to CP26                               | 4           | 21-Jul-25   | 25-Jul-25   | WB TSS - OHVD from CH8530 to CP26   |                                       |
|             |  | TC11400  | WB TSS - OHVD up to CP"26.5" blocked by CP27 WB Tym             | 3           | 25-Jul-25   | 28-Jul-25   | WB TSS - OHVD up to CP"26.5" blocked by CP27 WB Tym                                     |                                       |
|             |  | WB TSS - Fire Board - Tunnel Crown with deletion up Ch8924 | 80  | 17-Jul-25   | 05-Oct-25   |             |   |                                       |
|             |  | D12555   | WB TSS - Fire board - Tunnel Crown up to CP27                   | 4           | 17-Jul-25   | 21-Jul-25   | WB TSS - Fire board - Tunnel Crown up to CP27   |                                       |
|             |  | D12565   | WB TSS - Fire board - Tunnel Crown up to CP28                   | 8           | 28-Sep-25   | 05-Oct-25   |   |                                       |




| Activity ID  |  | Activity Name  |  | Dur | Start       | Finish    | 2025 |     |     |
|--|--|--|--|-----|-------------|-----------|------|-----|-----|
|  |  |  |  |     |             |           | Jul  | Aug | Sep |
| WB TSS - Fire Board - Road level with deletion up Ch8924 |  |  |  | 14  | 18-Sep-25   | 02-Oct-25 |      |     |     |
| A229446460   |  | WB TSS - Fire Board - Road level up to CP24                      |  | 14  | 18-Sep-25   | 02-Oct-25 |      |     |     |
| WB TSS - Road Barrier                                    |  |  |  | 100 | 03-Jul-25   | 11-Oct-25 |      |     |     |
| CPS  |  |  |  | 84  | 03-Jul-25   | 24-Sep-25 |      |     |     |
| A229447850   |  | WB TSS - Road Barrier CPS up to CP26                             |  | 6   | 03-Jul-25   | 10-Jul-25 |      |     |     |
| A229447650   |  | WB TSS - Road Barrier CPS up to CP28                             |  | 6   | 11-Aug-25   | 20-Aug-25 |      |     |     |
| TC1040   |  | WB TSS - Road Barrier CPS up to CP29                             |  | 4   | 21-Sep-25   | 24-Sep-25 |      |     |     |
| NCPS   |  |  |  | 13  | 20-Sep-25   | 11-Oct-25 |      |     |     |
| A229446430   |  | WB TSS - Road Barrier NCPS up to CP26                            |  | 6   | 20-Sep-25   | 27-Sep-25 |      |     |     |
| A229446420   |  | WB TSS - Road Barrier NCPS up to CP27                            |  | 6   | 27-Sep-25   | 11-Oct-25 |      |     |     |
| WB TSS - E&M Brackets                                    |  |  |  | 219 | 24-Nov-24 A | 01-Jul-25 |      |     |     |
| NCPS   |  |  |  | 219 | 24-Nov-24 A | 01-Jul-25 |      |     |     |
| TC11460  |  | WB TSS - E&M Brackets NCPS from CH8450 to CP25                   |  | 219 | 24-Nov-24 A | 01-Jul-25 |      |     |     |
| Eastbound (EB)   |  |  |  | 681 | 26-Nov-23 A | 06-Oct-25 |      |     |     |
| EB TSS - TBM Temporary Services                          |  |  |  | 7   | 11-Sep-25   | 18-Sep-25 |      |     |     |
| TBM slurry pipe relocation                               |  |  |  | 7   | 11-Sep-25   | 18-Sep-25 |      |     |     |
| A229447680   |  | TSS - EB NCPS Wall Pipe Relocation from CP23 to CP24             |  | 7   | 11-Sep-25   | 18-Sep-25 |      |     |     |
| EB TSS - Service Gallery                                 |  |  |  | 97  | 02-Jul-25   | 06-Oct-25 |      |     |     |
| CP21-26  |  |  |  | 97  | 02-Jul-25   | 06-Oct-25 |      |     |     |
| A229428552   |  | EB TSS - Service Gallery up to CP 25                             |  | 13  | 23-Aug-25   | 08-Sep-25 |      |     |     |
| Same Rate as TBM Excavation (Last SG 170m behind TBM CH) |  |  |  | 97  | 02-Jul-25   | 06-Oct-25 |      |     |     |
| EBTBM1380  |  | EB TSS - Service Gallery up to CH8473                            |  | 10  | 02-Jul-25   | 11-Jul-25 |      |     |     |
| EBTBM1390  |  | TRA: Stoppage 1 before Full Face Rock                            |  | 18  | 11-Jul-25   | 29-Jul-25 |      |     |     |
| EBTBM1400  |  | EB TSS - Service Gallery up to CH8484                            |  | 10  | 29-Jul-25   | 08-Aug-25 |      |     |     |
| EBTBM1410  |  | EB TSS - Service Gallery up to CH8495 (11m; 4.8R/wk) and allow   |  | 7   | 08-Aug-25   | 15-Aug-25 |      |     |     |
| EBTBM1500  |  | EB TSS - Service Gallery up to CH8505 (10m; 4.8R/wk)             |  | 7   | 15-Aug-25   | 22-Aug-25 |      |     |     |
| EBTBM1430  |  | EB TSS - Service Gallery up to CH8548 (43m; 4.8R/wk)             |  | 29  | 22-Aug-25   | 20-Sep-25 |      |     |     |
| EBTBM1440  |  | EB TSS - Service Gallery up to CH8578                            |  | 16  | 20-Sep-25   | 06-Oct-25 |      |     |     |
| EB TSS - Below Road Level Installation                   |  |  |  | 162 | 17-Feb-25 A | 28-Jul-25 |      |     |     |
| Low Point Sump Pit                                       |  |  |  | 162 | 17-Feb-25 A | 28-Jul-25 |      |     |     |
| Low Point @ CP12   |  |  |  | 162 | 17-Feb-25 A | 28-Jul-25 |      |     |     |
| TC11330  |  | EB TSS - Low Point Sump Pit waterproofing & testing (after TBM c |  | 162 | 17-Feb-25 A | 28-Jul-25 |      |     |     |
| EB TSS - Corbel  |  |  |  | 672 | 26-Nov-23 A | 27-Sep-25 |      |     |     |
| CP21-26  |  |  |  | 672 | 26-Nov-23 A | 27-Sep-25 |      |     |     |
| A229415982   |  | EB TSS - Corbel Stoppage at CP23                                 |  | 610 | 26-Nov-23 A | 27-Jul-25 |      |     |     |
| A229415952   |  | EB TSS - Corbel Structure up to CP24                             |  | 8   | 18-Sep-25   | 27-Sep-25 |      |     |     |
| EB TSS - OHVD  |  |  |  | 93  | 01-Jul-25   | 01-Oct-25 |      |     |     |
| TC305  |  | EB - ISSG Assembly (subject to ISSG availability)                |  | 14  | 01-Jul-25*  | 14-Jul-25 |      |     |     |
| CP21-26  |  |  |  | 4   | 27-Sep-25   | 01-Oct-25 |      |     |     |
| TC320  |  | EB TSS - OHVD up to CP24   |  | 4   | 27-Sep-25   | 01-Oct-25 |      |     |     |
| EB TSS - Road Barrier                                    |  |  |  | 8   | 27-Sep-25   | 05-Oct-25 |      |     |     |
| NCPS   |  |  |  | 8   | 27-Sep-25   | 05-Oct-25 |      |     |     |
| TC10160  |  | EB TSS - Road Barrier NCPS up to CP24                            |  | 8   | 27-Sep-25   | 05-Oct-25 |      |     |     |
| 08 CKL Tunnel  |  |  |  | 305 | 25-Nov-24 A | 25-Sep-25 |      |     |     |
| Westbound (WB)   |  |  |  | 14  | 01-Jul-25   | 14-Jul-25 |      |     |     |
| WB CKL - Before TBM breakthrough                         |  |  |  | 14  | 01-Jul-25   | 14-Jul-25 |      |     |     |
| Westbound (WB) Civil Works                               |  |  |  | 14  | 01-Jul-25   | 14-Jul-25 |      |     |     |
| WB Type A  |  |  |  | 14  | 01-Jul-25   | 14-Jul-25 |      |     |     |
| E&M Brackets   |  |  |  | 14  | 01-Jul-25   | 14-Jul-25 |      |     |     |
| A229450100   |  | CKL WB - E&M Bracket up to CP32                                  |  | 14  | 01-Jul-25   | 14-Jul-25 |      |     |     |
| WB EVB Portal  |  |  |  | 14  | 01-Jul-25   | 14-Jul-25 |      |     |     |
| A229450180   |  | CKL WB EVB Portal - Road Barrier                                 |  | 14  | 01-Jul-25   | 14-Jul-25 |      |     |     |
| Eastbound (EB)   |  |  |  | 305 | 25-Nov-24 A | 25-Sep-25 |      |     |     |
| EB CKL - Before TBM breakthrough                         |  |  |  | 305 | 25-Nov-24 A | 25-Sep-25 |      |     |     |
| Eastbound (EB) Structure Works                           |  |  |  | 254 | 25-Nov-24 A | 05-Aug-25 |      |     |     |

| Activity ID                                     | Activity Name   | Dur   | Start       | Finish      | Jul  | 2025<br>Aug   | Sep |
|---|---|---|-------------|-------------|--|---|-----|
| 08 Eastbound (EB) Civil Works                   | EB Type C   | 186   | 25-Nov-24 A | 15-Jul-25   |  |   |     |
|   | OHVD  | 186   | 25-Nov-24 A | 15-Jul-25   |  |   |     |
|   | A2050   | EB Type C - OHVD Formwork Modification & Relocation | 186         | 25-Nov-24 A | 15-Jul-25  | EB Type C - OHVD Formwork Modification & Relocation |     |
|   | EB Type A D&Br  | 21  | 16-Jul-25   | 05-Aug-25   |  |   |     |
|   | OHVD  | 21  | 16-Jul-25   | 05-Aug-25   |  |   |     |
|   | A1800   | EB D&Br - A1 OHVD Bay 5                             | 21          | 16-Jul-25   | 05-Aug-25  | EB D&Br - A1 OHVD Bay 5                             |     |
|   | Eastbound (EB) Civil Works                              | 87  | 01-Jul-25   | 25-Sep-25   |  |   |     |
|   | EB Type A   | 72  | 16-Jul-25   | 25-Sep-25   |  |   |     |
|   | A8980   | CKL EB Type A - E&M Bracket                         | 39          | 16-Jul-25   | 23-Aug-25  | CKL EB Type A - E&M Bracket                         |     |
|   | A229444530  | EB - Type A - Road Barrier                          | 36          | 11-Aug-25   | 25-Sep-25  | EB - Typ  |     |
|   | EB Type C   | 81  | 01-Jul-25   | 19-Sep-25   |  |   |     |
|   | A229450140  | CKL EB Type C - MIMEP module installation           | 6           | 01-Jul-25   | 06-Jul-25  | CKL EB Type C - MIMEP module installation           |     |
|   | A229444520  | CKL EB Type C2/C3 - Road Barrier                    | 27          | 16-Jul-25   | 11-Aug-25  | CKL EB Type C2/C3 - Road Barrier                    |     |
|   | A229450120  | CKL EB Type C2/C3 - Black paint                     | 7           | 11-Aug-25   | 18-Aug-25  | CKL EB Type C2/C3 - Black paint                     |     |
|   | A229450110  | CKL EB Type C2/C3 - E&M Bracket                     | 27          | 24-Aug-25   | 19-Sep-25  | CKL EB Type C2/C3 - E                               |     |
|   | EB Type A D&Br  | 36  | 03-Jul-25   | 13-Aug-25   |  |   |     |
|   | A229444700  | EB Type A Dr&BI - MIMEP module installation         | 36          | 03-Jul-25   | 13-Aug-25  | EB Type A Dr&BI - MIMEP module installation         |     |
|   | EB EVB Portal   | 21  | 01-Jul-25   | 21-Jul-25   |  |   |     |
| A229450150                                      | CKL EB EVB Portal - Road Barrier                        | 21  | 01-Jul-25   | 21-Jul-25   | CKL EB EVB Portal - Road Barrier                       |   |     |
| A229450160                                      | CKL EB EVB Portal - Black paint                         | 7   | 01-Jul-25   | 07-Jul-25   | CKL EB EVB Portal - Black paint                        |   |     |
| Branch Tunnel (S01)                             |   | 223   | 10-Feb-25 A | 21-Sep-25   |  |   |     |
| Branch Tunnel (S01) Civil Works                 |   | 223   | 10-Feb-25 A | 21-Sep-25   |  |   |     |
| E&M Brackets                                    |   | 223   | 10-Feb-25 A | 21-Sep-25   |  |   |     |
| A229450130                                      | CKL S01 - E&M Bracket                                   | 223   | 10-Feb-25 A | 21-Sep-25   | CKL S01 - E&M Br                                       |   |     |
| 09 Cross Passages                               |   | 151   | 01-Jul-25   | 28-Nov-25   |  |   |     |
| Cross Passages @ TSS & CKL Tunnel (CP7 to CP33) |   | 151   | 01-Jul-25   | 28-Nov-25   |  |   |     |
| CP25 by Mini TBM                                |   | 105   | 15-Aug-25   | 28-Nov-25   |  |   |     |
| TD0100  | CP25 - EB - Tympanum Civil works CH8489                 | 27  | 15-Aug-25   | 11-Sep-25   |  | CP25 - EB - Tympanum Civil works CH8489             |     |
| A7950   | CP25 - CP TBM cycle                                     | 18  | 11-Sep-25   | 29-Sep-25   |  |   |     |
| A8260   | CP25 - Internal & Collar Structure & ABWF               | 60  | 29-Sep-25   | 28-Nov-25   |  |   |     |
| CP27 by Mini TBM                                |   | 27  | 07-Sep-25   | 03-Oct-25   |  |   |     |
| TD0310  | CP27 - WB - Tympanum Civil works CH8688 R0936W          | 27  | 07-Sep-25   | 03-Oct-25   |  |   |     |
| CP28 by D&Br                                    |   | 129   | 01-Jul-25   | 06-Nov-25   |  |   |     |
| TD1000  | CP28 - WB - Temporary Platform setup & Tympanum CH8787  | 35  | 01-Jul-25   | 04-Aug-25   | CP28 - WB - Temporary Platform setup & Tympanum CH8787 |   |     |
| TD1030  | CP28 - WB - Sawcut and breakin                          | 6   | 05-Aug-25   | 10-Aug-25   | CP28 - WB - Sawcut and breakin                         |   |     |
| TD1250  | CP28 - Advance excavation from WB (15m Length; 0.17m/d) | 88  | 11-Aug-25   | 06-Nov-25   |  |   |     |
| CP29 by D&Br                                    |   | 35  | 13-Aug-25   | 16-Sep-25   |  |   |     |
| TD1310  | CP29 - WB - Temporary Platform setup & Tympanum         | 35  | 13-Aug-25   | 16-Sep-25   | CP29 - WB - Temporary Platfo                           |   |     |
| CP32 by D&BI                                    |   | 78  | 01-Jul-25   | 16-Sep-25   |  |   |     |
| A229438446                                      | CP32 - Backfill   | 26  | 01-Jul-25   | 26-Jul-25   | CP32 - Backfill  |   |     |
| A229438436                                      | CP32 - Lining Structure                                 | 26  | 27-Jul-25   | 21-Aug-25   | CP32 - Lining Structure                                |   |     |
| A229422590                                      | CP32 - Collar   | 26  | 22-Aug-25   | 16-Sep-25   | CP32 - Collar  |   |     |
| CP33 by D&BI                                    |   | 133   | 01-Jul-25   | 10-Nov-25   |  |   |     |
| A1900   | CP33 - Rock Plug Excavation Preparation Works           | 40  | 01-Jul-25   | 09-Aug-25   | CP33 - Rock Plug Excavation Preparation Works          |   |     |
| A1710   | CP33 - Rock Plug Excavation                             | 26  | 10-Aug-25   | 04-Sep-25   | CP33 - Rock Plug Excavation                            |   |     |
| A1720   | CP33 - CP33/Type E Junction                             | 67  | 05-Sep-25   | 10-Nov-25   |  |   |     |
| 10 East Ventilation Building - EVB              |   | 622   | 15-Mar-24 A | 26-Nov-25   |  |   |     |
| E&M Works (by BYME)                             |   | 427   | 15-Mar-24 A | 23-Aug-25   |  |   |     |
| EVB1210   | EVB - E&M works (B/F)                                   | 384   | 15-Mar-24 A | 04-Jul-25   | EVB - E&M works (B/F)                                  |   |     |
| EVB1300   | EVB - E&M works (LG3/F)                                 | 359   | 26-Apr-24 A | 12-Jul-25   | EVB - E&M works (LG3/F)                                |   |     |
| EVB1360   | EVB - E&M works (LG2/F)                                 | 330   | 21-May-24 A | 02-Jul-25   | EVB - E&M works (LG2/F)                                |   |     |
| EVB1440   | EVB - E&M works (LG1/F)                                 | 314   | 10-Jul-24 A | 30-Jul-25   | EVB - E&M works (LG1/F)                                |   |     |
| EVB1500   | EVB - E&M works (G/F)                                   | 311   | 07-Aug-24 A | 23-Aug-25   | EVB - E&M works (G/F)                                  |   |     |
| EVB Remaining Works (TBC)                       |   | 209   | 02-May-25 A | 26-Nov-25   |  |   |     |

| Activity ID   | Activity Name   | Dur | Start       | Finish    | 2025  |     |     |
|---|---|-----|-------------|-----------|---|-----|-----|
|   |   |     |             |           | Jul   | Aug | Sep |
| Facade works  |   |     |             |           |   |     |     |
| EVB1606   | EVB - Aluminium Fins Installation   | 107 | 13-Jun-25 A | 27-Sep-25 | EVB - Aluminium Fins Installation   |     |     |
| Logistic Deck & Tower Crane Removal                               |   |     |             |           |   |     |     |
| EVB1620   | EVB - Removal of Logistic Deck  | 73  | 02-May-25 A | 13-Jul-25 | EVB - Removal of Logistic Deck  |     |     |
| EVB1621   | EVB - Tower Crane TC2 Removal TC2   | 15  | 28-Sep-25   | 12-Oct-25 |   |     |     |
| Landscape works   |   |     |             |           |   |     |     |
| EVB1650   | EVB - Landscape - Above G/F   | 60  | 28-Sep-25   | 26-Nov-25 |   |     |     |
| VO - Recovery Vehicle Base (RVB) Construction                     |   |     |             |           |   |     |     |
| EVB1810   | RVB - Rock Excavation & Site Formation                                    | 45  | 13-Jul-25   | 27-Aug-25 | RVB - Rock Excavation & Site Formation                                    |     |     |
| 11 Tunnel E&M Installation  |   |     |             |           |   |     |     |
| WB - E&M Works  |   |     |             |           |   |     |     |
| WB - LV Cabling & LV Power On                                     |   |     |             |           |   |     |     |
| TF170   | WB CKL - CP32-EVB Portal E&M installation                                 | 90  | 01-Jul-25*  | 28-Sep-25 | WB CKL - CP32-EVB Portal E&M installation                                 |     |     |
| E&MC1180  | 01b. WB SUS CP1 to CP12 - E&M Installation (Final Stage)                  | 60  | 29-Jul-25   | 27-Sep-25 | 01b. WB SUS CP1 to CP12 - E&M Installation (Final Stage)                  |     |     |
| EB - E&M Works  |   |     |             |           |   |     |     |
| EB - LV Cabling & LV Power On                                     |   |     |             |           |   |     |     |
| E&MC1080  | 02. EB TSS - CP12-16 E&M installation                                     | 61  | 01-May-25 A | 01-Jul-25 | 02. EB TSS - CP12-16 E&M installation                                     |     |     |
| E&MC1150  | 01b. EB SUS to TSS CP12 - E&M Installation (Final Stage)                  | 60  | 13-Aug-25   | 12-Oct-25 | 01b. EB SUS to TSS CP12 - E&M Installation (Final Stage)                  |     |     |
| E&MC1130  | 11. EB CKL - CP31 to EVB Portal - E&M installation                        | 90  | 19-Sep-25   | 18-Dec-25 | 11. EB CKL - CP31 to EVB Portal - E&M installation                        |     |     |
| E&MC1140  | 12. EB CKL - BT & S01 - E&M installation                                  | 90  | 21-Sep-25   | 20-Dec-25 | 12. EB CKL - BT & S01 - E&M installation                                  |     |     |
| 14 Projectwide Final Works  |   |     |             |           |   |     |     |
| Tunnel Cladding   |   |     |             |           |   |     |     |
| Eastbound   |   |     |             |           |   |     |     |
| Typical Subframe & Cladding                                       |   |     |             |           |   |     |     |
| EB CPS  |   |     |             |           |   |     |     |
| VE10220   | 1. VE Panel - EB SUS (CPS) 400m   | 24  | 16-Aug-25   | 08-Sep-25 | 1. VE Panel - EB SUS (CPS) 400m   |     |     |
| EB NCPS   |   |     |             |           |   |     |     |
| VE10601   | 4. VE Panel - EB TSS CP12-17 (NCPS) 500m                                  | 237 | 29-Jan-25 A | 22-Sep-25 | 4. VE Panel - EB TSS CP12-17 (NCPS) 500m                                  |     |     |
| VE10571   | 1. VE Panel - EB SUS (NCPS) 400m  | 24  | 09-Sep-25   | 02-Oct-25 | 1. VE Panel - EB SUS (NCPS) 400m  |     |     |
| VE10611   | 5. VE Panel - EB TSS CP17-21 (NCPS) 400m                                  | 24  | 23-Sep-25   | 16-Oct-25 | 5. VE Panel - EB TSS CP17-21 (NCPS) 400m                                  |     |     |
| Westbound   |   |     |             |           |   |     |     |
| Typical Subframe & Cladding                                       |   |     |             |           |   |     |     |
| WB CPS  |   |     |             |           |   |     |     |
| VE10022   | 2. VE Panel - WB LSCC to CP7 (CPS) 150m                                   | 10  | 27-Sep-25   | 07-Oct-25 | 2. VE Panel - WB LSCC to CP7 (CPS) 150m                                   |     |     |
| WB NCPS   |   |     |             |           |   |     |     |
| VE10701   | 4. VE Panel - WB TSS CP12-17 (NCPS) 500m (subject to GTECH h/o End Jun25) | 146 | 15-Feb-25 A | 10-Jul-25 | 4. VE Panel - WB TSS CP12-17 (NCPS) 500m (subject to GTECH h/o End Jun25) |     |     |
| VE10731   | 5. VE Panel - WB TSS CP17-23 (NCPS) 600m                                  | 24  | 10-Jul-25*  | 03-Aug-25 | 5. VE Panel - WB TSS CP17-23 (NCPS) 600m                                  |     |     |
| Infrastructure Works  |   |     |             |           |   |     |     |
| 06 Road S20   |   |     |             |           |   |     |     |
| Addition of Planter (Non Critical)                                |   |     |             |           |   |     |     |
| A1140   | S20 - Construction of Remaining Planter                                   | 85  | 31-Mar-25 A | 26-Jul-25 | S20 - Construction of Remaining Planter                                   |     |     |
| Run-in Remaining Works  |   |     |             |           |   |     |     |
| A1100   | S20 - Run-in Remaining Works  | 83  | 08-May-25 A | 23-Aug-25 | S20 - Run-in Remaining Works  |     |     |
| VO - Modification of Irrigation System at Charging Station Run-in |   |     |             |           |   |     |     |
| A1070   | S20 - Shrubs Reinstatement (Non Critical)                                 | 12  | 02-Jul-25   | 16-Jul-25 | S20 - Shrubs Reinstatement (Non Critical)                                 |     |     |
| 07 Road L10(N)  |   |     |             |           |   |     |     |
| L10(N) Landscape (KD-26)  |   |     |             |           |   |     |     |
| LN10110   | L10(N) - Landscape softwork (TBC)   | 26  | 31-Jul-25   | 29-Aug-25 | L10(N) - Landscape softwork (TBC)   |     |     |
| L10(N) Remaining works  |   |     |             |           |   |     |     |
| LN10100   | Road L10N - Drainage T&C  | 21  | 01-Jul-25   | 21-Jul-25 | Road L10N - Drainage T&C  |     |     |
| LN10150   | Road L10N - Final Paving works & Road Marking                             | 20  | 08-Aug-25   | 27-Aug-25 | Road L10N - Final Paving works & Road Marking                             |     |     |
| L10 (N) Remaining Road Works (Subject to Manpower)                |   |     |             |           |   |     |     |
| A229450270  | L10 (N) - Remaining Road Signage  | 112 | 01-Mar-25 A | 28-Jul-25 | L10 (N) - Remaining Road Signage  |     |     |
| A229450280  | L10 (N) - Remaining Road Lighting   | 30  | 02-Jul-25   | 07-Aug-25 | L10 (N) - Remaining Road Lighting   |     |     |

| Activity ID | Activity Name   | Dur | Start       | Finish    | 2025 |   |     |
|-------------|---|-----|-------------|-----------|------|---|-----|
|             |   |     |             |           | Jul  | Aug   | Sep |
|             | <b>08 Road L10(S) &amp; L18</b>                         | 265 | 07-Jan-25 A | 28-Sep-25 |      |   |     |
|             | <b>L10(S) &amp; L18 Landscape (KD-24)</b>               | 25  | 02-Jul-25   | 30-Jul-25 |      |   |     |
| A229445710  | L10 (S) & L18 - Landscape softwork (TBC)                | 25  | 02-Jul-25*  | 30-Jul-25 |      | L10 (S) & L18 - Landscape softwork (TBC)                |     |
|             | <b>L10(S) &amp; L18 Remaining works</b>                 | 90  | 01-Jul-25   | 28-Sep-25 |      |   |     |
|             | <b>Roadside Area adjacent to L10(S)</b>                 | 90  | 01-Jul-25   | 28-Sep-25 |      |   |     |
|             | <b>Roadworks</b>  | 30  | 01-Jul-25   | 30-Jul-25 |      |   |     |
| A229448810  | Roadside Area adjacent to L10S - Road works             | 30  | 01-Jul-25*  | 30-Jul-25 |      | Roadside Area adjacent to L10S - Road works             |     |
|             | <b>Landscape</b>  | 30  | 30-Aug-25   | 28-Sep-25 |      |   |     |
| A229448820  | Roadside Area adjacent to L10S - Landscape (TBC)        | 30  | 30-Aug-25   | 28-Sep-25 |      |   |     |
|             | <b>Miscellaneous Road Works</b>                         | 137 | 07-Jan-25 A | 07-Jul-25 |      |   |     |
| A1190       | L10 (S) Carriageway - Construction of Remaining Islands | 137 | 07-Jan-25 A | 07-Jul-25 |      | L10 (S) Carriageway - Construction of Remaining Islands |     |
|             | <b>Preparation for Road Opening (L10S)</b>              | 51  | 26-Apr-25 A | 03-Jul-25 |      |   |     |
| A229450210  | L10 (S) Carriageway - Final Paving Works & Road Marking | 51  | 26-Apr-25 A | 03-Jul-25 |      | L10 (S) Carriageway - Final Paving Works & Road Marking |     |
|             | <b>10 Lam Chak Street/ Kai Hing Road Modification</b>   | 30  | 10-Sep-25   | 10-Oct-25 |      |   |     |
|             | <b>LCS/KHR Modification (KD-19)</b>                     | 30  | 10-Sep-25   | 10-Oct-25 |      |   |     |
|             | <b>VO -Additional Raod Lighting at Stage 1 Area</b>     | 30  | 10-Sep-25   | 10-Oct-25 |      |   |     |
| A229450080  | VO - Additional Road Lighting installation              | 30  | 10-Sep-25   | 10-Oct-25 |      |   |     |





| Activity ID   |  | Activity Name | Dur         | Start       | Finish    | 2025 |     |     |
|---|--|---------------|-------------|-------------|-----------|------|-----|-----|
|   |  |               |             |             |           | Aug  | Sep | Oct |
| HKT2 Pre-P80 Programme DD 01Aug25   |  |               | 796         | 20-Nov-23 A | 23-Jan-26 |      |     |     |
| Construction  |  |               | 796         | 20-Nov-23 A | 23-Jan-26 |      |     |     |
| Trunk Road T2   |  |               | 796         | 20-Nov-23 A | 23-Jan-26 |      |     |     |
| 02 AtGrade Road -AGR  |  |               | 532         | 15-Jun-24 A | 28-Nov-25 |      |     |     |
| Kiosk   |  |               | 120         | 01-Aug-25   | 28-Nov-25 |      |     |     |
| AGR 1030  | Kiosk - procurement, fabrication & delivery                                    | 90            | 01-Aug-25*  | 29-Oct-25   |           |      |     |     |
| AGR 1060  | Kiosk - Civil  | 30            | 30-Oct-25   | 28-Nov-25   |           |      |     |     |
| AGR - Road & Drainage works   |  |               | 430         | 15-Jun-24 A | 19-Aug-25 |      |     |     |
| AGR 1021  | AGR - TCSS Provision CH5860-5962   | 174           | 09-Jan-25 A | 12-Aug-25   |           |      |     |     |
| AGR 1150  | AGR - Central Barrier (subject to CKR interface and TBM haul road arrangement) | 12            | 07-Aug-25   | 19-Aug-25   |           |      |     |     |
| Eastbound   |  |               | 191         | 07-Dec-24 A | 04-Aug-25 |      |     |     |
| AGR 1040  | AGR - EB Drainage & Gully Installation   | 191           | 07-Dec-24 A | 04-Aug-25   |           |      |     |     |
| Westbound   |  |               | 430         | 15-Jun-24 A | 19-Aug-25 |      |     |     |
| AGR 1020  | AGR - WB Drainage & Gully Installation   | 336           | 15-Jun-24 A | 01-Aug-25   |           |      |     |     |
| AGR 1050  | AGR - WB Road Side Barrier   | 185           | 15-Feb-25 A | 19-Aug-25   |           |      |     |     |
| AGR 1140  | AGR - WB Subbase (subject to CKR interface and TBM haul road arrangement)      | 124           | 06-Mar-25 A | 07-Aug-25   |           |      |     |     |
| 03 Depressed Road - DPR   |  |               | 166         | 16-Jun-25 A | 28-Nov-25 |      |     |     |
| DPR - Road Works  |  |               | 166         | 16-Jun-25 A | 28-Nov-25 |      |     |     |
| Temporary Ramp for CKR Opening  |  |               | 60          | 01-Aug-25   | 29-Sep-25 |      |     |     |
| A229450370  | AGR & DPR - Traffic diversion  | 15            | 01-Aug-25   | 15-Aug-25   |           |      |     |     |
| A229450510  | DPR - WB Ramp demolition   | 15            | 16-Aug-25   | 30-Aug-25   |           |      |     |     |
| A229450530  | DPR - Remaining Road Works   | 30            | 31-Aug-25   | 29-Sep-25   |           |      |     |     |
| Rising Main   |  |               | 166         | 16-Jun-25 A | 28-Nov-25 |      |     |     |
| A229450070  | DPR - Civil - temp drainage system modification                                | 76            | 16-Jun-25 A | 30-Aug-25   |           |      |     |     |
| A229450170  | DPR - Civil - Perm civil provision   | 30            | 31-Aug-25   | 29-Sep-25   |           |      |     |     |
| A229426391  | DPR - E&M - Sump pit pumps and watermain installation                          | 60            | 30-Sep-25   | 28-Nov-25   |           |      |     |     |
| DPR - Final Works   |  |               | 36          | 01-Aug-25   | 11-Sep-25 |      |     |     |
| Landscape work (TBC)  |  |               | 36          | 01-Aug-25   | 11-Sep-25 |      |     |     |
| A12991  | Landscape Soil Filling   | 24            | 01-Aug-25   | 28-Aug-25   |           |      |     |     |
| A12992  | Planter works  | 12            | 29-Aug-25   | 11-Sep-25   |           |      |     |     |
| 05 Supporting Underground Structure - SUS                                     |  |               | 84          | 30-Jun-25 A | 21-Sep-25 |      |     |     |
| SUS - Tunnel Civil Works  |  |               | 84          | 30-Jun-25 A | 21-Sep-25 |      |     |     |
| A229450470  | SUS VE Panel Design Review (EB)  | 59            | 30-Jun-25 A | 27-Aug-25   |           |      |     |     |
| A229450490  | SUS VE Panel Design Review (WB)  | 70            | 30-Jun-25 A | 08-Sep-25   |           |      |     |     |
| A229450440  | Parapet Defect Rectification (EB NCP side)                                     | 27            | 29-Jul-25 A | 24-Aug-25   |           |      |     |     |
| A229450450  | Parapet Defect Rectification (WB CP side) (Design TBC)                         | 14            | 25-Aug-25   | 07-Sep-25   |           |      |     |     |
| A229450460  | Parapet Defect Rectification (WB NCP side) (Design TBC)                        | 14            | 08-Sep-25   | 21-Sep-25   |           |      |     |     |
| Eastbound TCW   |  |               | 14          | 01-Aug-25   | 14-Aug-25 |      |     |     |
| EB Road Barrier   |  |               | 14          | 01-Aug-25   | 14-Aug-25 |      |     |     |
| SUS10060  | SUS EB - Road Barrier (CPS) Last 50m   | 14            | 01-Aug-25   | 14-Aug-25   |           |      |     |     |
| Westbound TCW   |  |               | 14          | 01-Aug-25   | 14-Aug-25 |      |     |     |
| WB Road Barrier   |  |               | 14          | 01-Aug-25   | 14-Aug-25 |      |     |     |
| SUS10210  | SUS WB - Road Barrier (CPS) Last 50m   | 14            | 01-Aug-25   | 14-Aug-25   |           |      |     |     |
| 06 Launching Shaft & C&C Tunnel - LSCC  |  |               | 733         | 20-Nov-23 A | 21-Nov-25 |      |     |     |
| LSCC - Structure works  |  |               | 56          | 01-Aug-25   | 25-Sep-25 |      |     |     |
| Launching Shaft   |  |               | 56          | 01-Aug-25   | 25-Sep-25 |      |     |     |
| LS - Miscellaneous Structural Openings  |  |               | 56          | 01-Aug-25   | 25-Sep-25 |      |     |     |
| 01 Massfill at cable trench (subject to temporary cable relocation)           |  |               | 14          | 12-Sep-25   | 25-Sep-25 |      |     |     |
| A229448630  | Clearance and Massfill the trench  | 14            | 12-Sep-25   | 25-Sep-25   |           |      |     |     |
| 02 Road slab opening & Drainage works (subject to temporary cable relocation) |  |               | 42          | 01-Aug-25   | 11-Sep-25 |      |     |     |

| Activity ID |  | Activity Name  | Dur | Start       | Finish    | 2025  |                              |     |
|-------------|--|--|-----|-------------|-----------|---|------------------------------|-----|
|             |  |  |     |             |           | Aug   | Sep                          | Oct |
|             | A229448640   | RC Slab, Manhole, drainage pipe construction and massfill            | 42  | 01-Aug-25   | 11-Sep-25 | RC Slab, Manhole, drainage pipe construction and massfill                   |                              |     |
|             | 04 In situ SG at LS/TSS connection (subject to temporary works to maintain tunnelling) |  | 31  | 01-Aug-25   | 31-Aug-25 |   |                              |     |
|             | A229448570   | EB & WB in situ Service Gallery CPS - Part 1                         | 7   | 01-Aug-25   | 07-Aug-25 | EB & WB in situ Service Gallery CPS - Part 1                                |                              |     |
|             | A229448580   | EB & WB in situ Service Gallery CPS - Part 2                         | 7   | 08-Aug-25   | 14-Aug-25 | EB & WB in situ Service Gallery CPS - Part 2                                |                              |     |
|             | A229448581   | Road Diversion   | 3   | 15-Aug-25   | 17-Aug-25 | Road Diversion  |                              |     |
|             | A229448590   | EB & WB in situ Service Gallery NCPS - Part 1                        | 7   | 18-Aug-25   | 24-Aug-25 | EB & WB in situ Service Gallery NCPS - Part 1                               |                              |     |
|             | A229448600   | EB & WB in situ Service Gallery NCPS - Part 2                        | 7   | 25-Aug-25   | 31-Aug-25 | EB & WB in situ Service Gallery NCPS - Part 2                               |                              |     |
|             | 05 RC works at MMEP Opening for Service Galleries Works (subject to BYME 8)            |  | 49  | 01-Aug-25   | 18-Sep-25 |   |                              |     |
|             | A229448650   | Stage 1 - Narrow the opening to 3.5m*2m RC works                     | 28  | 01-Aug-25*  | 28-Aug-25 | Stage 1 - Narrow the opening to 3.5m*2m RC works                            |                              |     |
|             | A229448660   | Stage 2 - Closing out the opening (after SG installation completion) | 14  | 01-Aug-25*  | 14-Aug-25 | Stage 2 - Closing out the opening (after SG installation completion TBC)    |                              |     |
|             | A229449020   | Stage 1a - Emergency staircase corridor RC works                     | 21  | 29-Aug-25   | 18-Sep-25 | Stage 1a - Emergency staircase corridor RC works                            |                              |     |
|             | LSCC - Backfilling & Dwall Dismantling   |  | 113 | 01-Aug-25   | 21-Nov-25 |   |                              |     |
|             | A229447780   | D-wall dismantling at LCS side (from +1.0mPD to +4.0mPD) TBC         | 45  | 01-Aug-25   | 14-Sep-25 | D-wall dismantling at LCS side (from +1.0mPD to +4.0mPD) TBC                |                              |     |
|             | A229447781   | D-wall dismantling (from +1.0mPD to +4.0mPD) ~3050 m3 TBC            | 38  | 15-Sep-25   | 22-Oct-25 |   | D-wall dismantling           |     |
|             | A229447790   | Stage 2b (i) Final Backfilling at LCS side with open cut and allow L | 18  | 23-Oct-25   | 10-Nov-25 |   |                              |     |
|             | A229447800   | Stage 2b (ii) Final Backfilling (from +1.0mPD to +4.0mPD) (total qt  | 30  | 23-Oct-25   | 21-Nov-25 |   |                              |     |
|             | LSCC - Tunnel Civil Works  |  | 678 | 20-Nov-23 A | 28-Sep-25 |   |                              |     |
|             | Eastbound TCW  |  | 678 | 20-Nov-23 A | 28-Sep-25 |   |                              |     |
|             | LSCC10070  | LSCC EB - Fireboard  | 620 | 20-Nov-23 A | 01-Aug-25 | LSCC EB - Fireboard   |                              |     |
|             | LSCC10090  | LSCC EB - E&M brackets (CPS)   | 343 | 06-Sep-24 A | 15-Aug-25 | LSCC EB - E&M brackets (CPS)  |                              |     |
|             | LSCC10421  | LSCC EB - E&M brackets (NCPS)  | 343 | 20-Sep-24 A | 29-Aug-25 | LSCC EB - E&M brackets (NCPS)   |                              |     |
|             | LSCC10050  | LSCC EB - Road Barrier (NCPS)  | 92  | 13-Jun-25 A | 13-Sep-25 | LSCC EB - Road Barrier (NCPS)   |                              |     |
|             | LSCC10110  | LSCC EB - TCSS provision   | 6   | 15-Aug-25   | 21-Aug-25 | LSCC EB - TCSS provision  |                              |     |
|             | LSCC10431  | LSCC EB - Road Barrier (CPS)   | 15  | 13-Sep-25*  | 28-Sep-25 |   | LSCC EB - Road Barrier (CPS) |     |
|             | Westbound TCW  |  | 440 | 13-Jul-24 A | 26-Sep-25 |   |                              |     |
|             | LSCC10080  | LSCC WB - E&M brackets (CPS)   | 398 | 13-Jul-24 A | 15-Aug-25 | LSCC WB - E&M brackets (CPS)  |                              |     |
|             | LSCC10060  | LSCC WB - Fireboard  | 286 | 19-Oct-24 A | 01-Aug-25 | LSCC WB - Fireboard   |                              |     |
|             | LSCC10411  | LSCC WB - E&M brackets (NCPS)  | 309 | 24-Oct-24 A | 29-Aug-25 | LSCC WB - E&M brackets (NCPS)   |                              |     |
|             | LSCC10441  | LSCC WB - Road Barrier (NCPS)  | 105 | 30-May-25 A | 12-Sep-25 | LSCC WB - Road Barrier (NCPS)   |                              |     |
|             | LSCC10100  | LSCC WB - TCSS provision   | 6   | 15-Aug-25   | 21-Aug-25 | LSCC WB - TCSS provision  |                              |     |
|             | LSCC10451  | LSCC WB - Road Barrier (CPS)   | 14  | 12-Sep-25   | 26-Sep-25 |   | LSCC WB - Road Barrier (CPS) |     |
|             | 07 Tunnel Sub-sea (TSS)  |  | 743 | 26-Nov-23 A | 07-Dec-25 |   |                              |     |
|             | Additional Excavation by D&Br from CKL   |  | 360 | 15-Aug-24 A | 09-Aug-25 |   |                              |     |
|             | Eastbound Pilot Tunnel   |  | 360 | 15-Aug-24 A | 09-Aug-25 |   |                              |     |
|             | CKL1130  | EB CKL - Pilot tunnel enlargement (Benching)                         | 360 | 15-Aug-24 A | 09-Aug-25 | EB CKL - Pilot tunnel enlargement (Benching)                                |                              |     |
|             | TSS - TBM Excavation from Kai Tak  |  | 158 | 03-Jul-25 A | 07-Dec-25 |   |                              |     |
|             | Westbound - TBM S1281  |  | 158 | 03-Jul-25 A | 07-Dec-25 |   |                              |     |
|             | TBM1 Tunneling   |  | 64  | 03-Jul-25 A | 04-Sep-25 |   |                              |     |
|             | CP26-31  |  | 64  | 03-Jul-25 A | 04-Sep-25 |   |                              |     |
|             | A229449564   | WB TBM Tunnelling CH8975-9068 (Pilot tunnel section) (93m 7.0F       | 40  | 03-Jul-25 A | 11-Aug-25 | WB TBM Tunnelling CH8975-9068 (Pilot tunnel section) (93m 7.0R/wk, 15% TRA) |                              |     |
|             | A229449565   | WB TBM Tunnelling CH9068-9137 (cavern) (69m; 9.3R/wk, 10% T          | 24  | 11-Aug-25   | 04-Sep-25 | WB TBM Tunnelling CH9068-9137 (cavern) (69m; 9.3R/wk, 10% TRA)              |                              |     |
|             | TBM1 Dismantling   |  | 94  | 04-Sep-25   | 07-Dec-25 |   |                              |     |
|             | General  |  | 94  | 04-Sep-25   | 07-Dec-25 |   |                              |     |
|             | TA1251   | WB TBM - Last 5 Rings Installation                                   | 2   | 04-Sep-25   | 06-Sep-25 | WB TBM - Last 5 Rings Installation  |                              |     |
|             | TA85   | WB TBM dismantling - TSS side (46d)                                  | 46  | 04-Sep-25   | 20-Oct-25 | WB TBM dismantling - TSS side (46d)   |                              |     |
|             | TA325  | WB TBM dismantling - CKL side (94d)                                  | 94  | 04-Sep-25   | 07-Dec-25 | WB TBM dismantling - CKL side (94d)   |                              |     |
|             | TSS side   |  | 50  | 06-Sep-25   | 26-Oct-25 |   |                              |     |
|             | Gantry 4   |  | 8   | 06-Sep-25   | 14-Sep-25 |   |                              |     |
|             | TA1551   | WB TBM dismantling - Last ring securing + Tailskin Cutting + Erec    | 8   | 06-Sep-25   | 14-Sep-25 | WB TBM dismantling - Last ring securing + Tailskin Cutting + Erector Prep   |                              |     |
|             | Gantries 1-3   |  | 29  | 06-Sep-25   | 05-Oct-25 |   |                              |     |
|             | TA135  | WB TBM dismantling - Gantry 4 Level 3, 2 & 1 dismantling             | 7   | 06-Sep-25   | 13-Sep-25 | WB TBM dismantling - Gantry 4 Level 3, 2 & 1 dismantling                    |                              |     |

| Activity ID |                         | Activity Name  | Dur | Start       | Finish    | 2025   |   |   |
|-------------|-------------------------|--|-----|-------------|-----------|--|---|---|
|             |                         |  |     |             |           | Aug  | Sep   | Oct   |
|             | TA115                   | WB TBM dismantling - Gantry 1-3 pulling (free up 1st 50m)                    | 1   | 13-Sep-25   | 14-Sep-25 |  | <div>WB TBM dismantling - Gantry 1-3 pulling (free up 1st 50m)</div>                    |   |
|             | TA275                   | WB TBM dismantling - Propping all gantries                                   | 3   | 14-Sep-25   | 17-Sep-25 |  | <div>WB TBM dismantling - Propping all gantries</div>                                   |   |
|             | TA921                   | WB TBM dismantling - Gantry 1-3 Level 3 Dismantling                          | 6   | 17-Sep-25   | 23-Sep-25 |  | <div>WB TBM dismantling - Gantry 1-3 Level 3 Dismantling</div>                          |   |
|             | TA931                   | WB TBM dismantling - Gantry 1-3 Level 2 Dismantling                          | 4   | 23-Sep-25   | 27-Sep-25 |  | <div>WB TBM dismantling - Gantry 1-3 Level 2 Dismantling</div>                          |   |
|             | TA1261                  | WB TBM dismantling - Gantry 1-3 Level 1 Dismantling                          | 4   | 27-Sep-25   | 01-Oct-25 |  | <div>WB TBM dismantling - Gantry 1-3 Level 1 Dismantling</div>                          |   |
|             | TA285                   | WB TBM dismantling - Remove all Boggies                                      | 4   | 01-Oct-25   | 05-Oct-25 |  |   | <div>WB TBM dismantling - Remove all Boggies</div>                      |
|             | Back shield             |  | 8   | 06-Sep-25   | 14-Sep-25 |  |   |   |
|             | TA185                   | WB TBM dismantling - Erector table and cylinders removal                     | 2   | 06-Sep-25   | 08-Sep-25 |  | <div>WB TBM dismantling - Erector table and cylinders removal</div>                     |   |
|             | TA1451                  | WB TBM dismantling - Shield systems removal (slurry, gear oil, grease, elec) | 3   | 06-Sep-25   | 09-Sep-25 |  | <div>WB TBM dismantling - Shield systems removal (slurry, gear oil, grease, elec)</div> |   |
|             | TA1461                  | WB TBM dismantling - Bottom 3 x Thrust Cylinders                             | 8   | 06-Sep-25   | 14-Sep-25 |  | <div>WB TBM dismantling - Bottom 3 x Thrust Cylinders</div>                             |   |
|             | TA1471                  | WB TBM dismantling - Articulation cylinders                                  | 5   | 09-Sep-25   | 14-Sep-25 |  | <div>WB TBM dismantling - Articulation cylinders</div>                                  |   |
|             | HAG System Preparation  |  | 13  | 08-Sep-25   | 21-Sep-25 |  |   |   |
|             | TA1271                  | WB TBM dismantling - Segment Feeder removal                                  | 1   | 08-Sep-25   | 09-Sep-25 |  | <div>WB TBM dismantling - Segment Feeder removal</div>                                  |   |
|             | TA1281                  | WB TBM dismantling - Installation front sliding rail type M under er         | 1   | 09-Sep-25   | 10-Sep-25 |  | <div>WB TBM dismantling - Installation front sliding rail type M under er</div>         |   |
|             | TA1291                  | WB TBM dismantling - Installation Banana's frame                             | 2   | 14-Sep-25   | 16-Sep-25 |  | <div>WB TBM dismantling - Installation Banana's frame</div>                             |   |
|             | TA1301                  | WB TBM dismantling - Concreting  | 3   | 16-Sep-25   | 19-Sep-25 |  | <div>WB TBM dismantling - Concreting</div>  |   |
|             | TA1311                  | WB TBM dismantling - Sliding Rails installation                              | 2   | 19-Sep-25   | 21-Sep-25 |  | <div>WB TBM dismantling - Sliding Rails installation</div>                              |   |
|             | Erector, Cross Beam, MD |  | 28  | 21-Sep-25   | 19-Oct-25 |  |   |   |
|             | Erector                 |  | 7   | 21-Sep-25   | 28-Sep-25 |  |   |   |
|             | TA1321                  | WB TBM dismantling - Preparation for Pulling Erector                         | 3   | 21-Sep-25   | 24-Sep-25 |  |   | <div>WB TBM dismantling - Preparation for Pulling Erector</div>         |
|             | TA1331                  | WB TBM dismantling - Unbolting Erector & Pulling Erector                     | 1   | 24-Sep-25   | 25-Sep-25 |  |   | <div>WB TBM dismantling - Unbolting Erector &amp; Pulling Erector</div> |
|             | TA1341                  | WB TBM dismantling - Dismantling Erector                                     | 2   | 25-Sep-25   | 27-Sep-25 |  |   | <div>WB TBM dismantling - Dismantling Erector</div>                     |
|             | TA1351                  | WB TBM dismantling - Dismantling Trolley                                     | 1   | 27-Sep-25   | 28-Sep-25 |  |   | <div>WB TBM dismantling - Dismantling Trolley</div>                     |
|             | Cross Beam              |  | 9   | 28-Sep-25   | 07-Oct-25 |  |   |   |
|             | TA1361                  | WB TBM dismantling - Preparation pulling X Beam                              | 3   | 28-Sep-25   | 01-Oct-25 |  |   | <div>WB TBM dismantling - Preparation pulling X Beam</div>              |
|             | TA1371                  | WB TBM dismantling - Pulling X Beam  | 1   | 01-Oct-25   | 02-Oct-25 |  |   | <div>WB TBM dismantling - Pulling X Beam</div>                          |
|             | TA1381                  | WB TBM dismantling - Welding X Beam lifting lugs                             | 1   | 02-Oct-25   | 03-Oct-25 |  |   | <div>WB TBM dismantling - Welding X Beam lifting lugs</div>             |
|             | TA1391                  | WB TBM dismantling - Wire Cutting of X Beam                                  | 4   | 03-Oct-25   | 07-Oct-25 |  |   | <div>WB TBM dismantling - Wire Cutting of X Beam</div>                  |
|             | Main Drive              |  | 12  | 07-Oct-25   | 19-Oct-25 |  |   |   |
|             | TA1401                  | WB TBM dismantling - Preparation pulling MD                                  | 3   | 07-Oct-25   | 10-Oct-25 |  |   | <div>WB TBM dismantling - Preparation pulling MD</div>                  |
|             | TA1411                  | WB TBM dismantling - Pulling MD to Trolley to Rotation Device                | 2   | 10-Oct-25   | 12-Oct-25 |  |   | <div>WB TBM dismantling - Pulling MD to Trolley</div>                   |
|             | TA1421                  | WB TBM dismantling - Preparation of MD Rotation                              | 3   | 12-Oct-25   | 15-Oct-25 |  |   | <div>WB TBM dismantling - Preparation of MD Rotation</div>              |
|             | TA1431                  | WB TBM dismantling - MD Rotation   | 1   | 15-Oct-25   | 16-Oct-25 |  |   | <div>WB TBM dismantling - MD Rotation</div>                             |
|             | TA1441                  | WB TBM dismantling - MD Dismantling and Cutting                              | 3   | 16-Oct-25   | 19-Oct-25 |  |   | <div>WB TBM dismantling - MD</div>                                      |
|             | Final Demo              |  | 7   | 19-Oct-25   | 26-Oct-25 |  |   |   |
|             | TA296                   | WB TBM dismantling - HAG System Rail dismantling & Concrete E                | 7   | 19-Oct-25   | 26-Oct-25 |  |   | <div>WB TBM dismantling</div>   |
|             | TA1581                  | WB TBM dismantling - Oxycutting area dismantling                             | 2   | 19-Oct-25   | 21-Oct-25 |  |   | <div>WB TBM dismantling</div>   |
|             | CKL Side                |  | 64  | 06-Sep-25   | 09-Nov-25 |  |   |   |
|             | Cutterhead              |  | 35  | 06-Sep-25   | 11-Oct-25 |  |   |   |
|             | TA90                    | WB TBM dismantling - CKL Civil Works #1                                      | 12  | 06-Sep-25   | 18-Sep-25 | <div>WB TBM dismantling - CKL Civil Works #1</div> |   |   |
|             | TA901                   | WB TBM dismantling - Cutterhead dismantling Part 1                           | 8   | 18-Sep-25   | 26-Sep-25 |  | <div>WB TBM dismantling - Cutterhead dismantling Part 1</div>                           |   |
|             | TA1481                  | WB TBM dismantling - Cutterhead Rotation and Securing                        | 1   | 26-Sep-25   | 27-Sep-25 |  | <div>WB TBM dismantling - Cutterhead Rotation and Securing</div>                        |   |
|             | TA1491                  | WB TBM dismantling - Cutterhead dismantling Part 2                           | 14  | 27-Sep-25   | 11-Oct-25 |  | <div>WB TBM dismantling - Cutterhead dismantling</div>                                  |   |
|             | Spherical Bearing       |  | 9   | 11-Oct-25   | 20-Oct-25 |  |   |   |
|             | TA91                    | WB TBM dismantling - CKL Civil Works #2                                      | 5   | 11-Oct-25   | 16-Oct-25 |  |   | <div>WB TBM dismantling - CKL Civil V</div>                             |
|             | TA92                    | WB TBM dismantling - Spherical Bearing                                       | 4   | 16-Oct-25   | 20-Oct-25 |  |   | <div>WB TBM dismantling - S</div>                                       |
|             | Sheild                  |  | 20  | 20-Oct-25   | 09-Nov-25 |  |   |   |
|             | TA1561                  | WB TBM dismantling - CKL Civil Works #3                                      | 5   | 20-Oct-25   | 25-Oct-25 |  |   | <div>WB TBM di</div>  |
|             | TA93                    | WB TBM dismantling - Shield Part 1   | 15  | 25-Oct-25   | 09-Nov-25 |  |   | <div></div>   |
|             | Eastbound - TBM S1282   |  | 124 | 23-Jul-25 A | 24-Nov-25 |  |   |   |
|             | TBM2 Tunneling          |  | 124 | 23-Jul-25 A | 24-Nov-25 |  |   |   |



| Activity ID  |  | Activity Name   | Dur         | Start       | Finish  | 2025  |                                       |                                       |
|--|--|---|-------------|-------------|---|---|---------------------------------------|---------------------------------------|
|  |  |   |             |             |   | Aug   | Sep                                   | Oct                                   |
|  |  | CP26-30   | 124         | 23-Jul-25 A | 24-Nov-25   |   |                                       |                                       |
|  | EBTBM1420  | EB TBM Backfill Operation                                       | 15          | 23-Jul-25 A | 07-Aug-25   | <div></div> EB TBM Backfill Operation   |                                       |                                       |
|  | EBTBM1360  | EB TBM Tunnelling - Seawall Section 6 Rings CH8641-8654 (11m    | 12          | 07-Aug-25   | 19-Aug-25   | <div></div> EB TBM Tunnelling - Seawall Section 6 Rings CH8641-8654 (11m; 3.6R/wk,as-built rate)        |                                       |                                       |
|  | EBTBM1260  | EB TBM Tunnelling - Seawall Section up to Full Face Rock CH865  | 14          | 19-Aug-25   | 02-Sep-25   | <div></div> EB TBM Tunnelling - Seawall Section up to Full Face Rock CH8654-8675 (21m; 4.8R/wk,15% TRA) |                                       |                                       |
|  | EBTBM1530  | EB TBM Tunnelling - Seawall Section up to Full Face Rock CH867  | 15          | 02-Sep-25   | 17-Sep-25   | <div></div> EB TBM Tunnelling - Seawall Section up to Full Face Rock CH8675-8698 (23m; 4.8R/wk,15% TRA) |                                       |                                       |
|  | EBTBM1270  | EB TBM Tunnelling - Seawall Section up to Full Face Rock CH869  | 14          | 17-Sep-25   | 01-Oct-25   | <div></div> EB TBM Tunnelling - Seawall Section up to Full Face Rock CH8698-87                          |                                       |                                       |
|  | EBTBM1280  | EB TBM Tunnelling CH8718-8748 up to start of Pilot Tunnel (30m; | 16          | 01-Oct-25   | 17-Oct-25   | <div></div> EB TBM Tunnelling CH8718-87   |                                       |                                       |
|  | EBTBM1290  | EB TBM Tunnelling CH8748-8831 (Pilot tunnel section) (83m; 7.0F | 38          | 17-Oct-25   | 24-Nov-25   | <div></div>   |                                       |                                       |
| TSS - Tunnel Civil Works                                   |  |   | 727         | 26-Nov-23 A | 21-Nov-25   |   |                                       |                                       |
| Westbound (WB)   |  |   | 363         | 24-Nov-24 A | 21-Nov-25   |   |                                       |                                       |
| WB TSS - TBM Temporary Services                            |  |   | 56          | 06-Sep-25   | 01-Nov-25   |   |                                       |                                       |
| TBM slurry pipe relocation                                 |  |   | 7           | 11-Oct-25   | 18-Oct-25   |   |                                       |                                       |
| A229447540   | TSS - WB NCPS Wall Pipe Relocation from CP23 to CP24           | 7   | 11-Oct-25   | 18-Oct-25   |   |   |                                       | <div></div> TSS - WB NCPS Wall Pipe R |
| TBM slurry pipe dismantling                                |  |   | 56          | 06-Sep-25   | 01-Nov-25   |   |                                       |                                       |
| A229447590   | TSS - WB NCPS Wall Pipe Dismantling from CP25 to CP29          | 14  | 06-Sep-25   | 20-Sep-25   |   | <div></div> TSS - WB NCPS Wall Pipe Dismantling from CP25 to CP29                                       |                                       |                                       |
| A229447610   | TSS - WB NCPS Wall Pipe Dismantling from FT to CP11            | 14  | 06-Sep-25   | 20-Sep-25   |   | <div></div> TSS - WB NCPS Wall Pipe Dismantling from FT to CP11   |                                       |                                       |
| A229447620   | TSS - WB NCPS Wall Pipe Dismantling from CP11 to CP16          | 14  | 20-Sep-25   | 04-Oct-25   |   | <div></div> TSS - WB NCPS Wall Pipe Dismantling from CP11 to CP16                                       |                                       |                                       |
| A229447630   | TSS - WB NCPS Wall Pipe Dismantling from CP16 to CP21          | 14  | 04-Oct-25   | 18-Oct-25   |   |   | <div></div> TSS - WB NCPS Wall Pipe D |                                       |
| A229447640   | TSS - WB NCPS Wall Pipe Dismantling from CP21 to CP25          | 14  | 18-Oct-25   | 01-Nov-25   |   |   | <div></div>                           |                                       |
| WB TSS - Service Gallery                                   |  |   | 123         | 03-Jul-25 A | 02-Nov-25   |   |                                       |                                       |
| CP26-31  |  |   | 123         | 03-Jul-25 A | 02-Nov-25   |   |                                       |                                       |
| TC3010   | WB TSS - Service Gallery up from CH8786 to CH8897 (CP29)       | 42  | 05-Jul-25 A | 16-Aug-25   | <div></div> WB TSS - Service Gallery up from CH8786 to CH8897 (CP29)                    |   |                                       |                                       |
| TC3020   | WB TSS - Service Gallery up to CP30 (100m)                     | 7   | 26-Oct-25   | 02-Nov-25   |   |   |                                       | <div></div>                           |
| Same Rate as TBM Excavation (Last SG 170m behind TBM CH)   |  |   | 96          | 03-Jul-25 A | 06-Oct-25   |   |                                       |                                       |
| A229450340   | WB TBM Tunnelling CH8975-9068 (Pilot tunnel section) (93m 7.0F | 72  | 03-Jul-25 A | 12-Sep-25   | <div></div> WB TBM Tunnelling CH8975-9068 (Pilot tunnel section) (93m 7.0R/wk, 15% TRA) |   |                                       |                                       |
| A229450350   | WB TBM Tunnelling CH9068-9137 (cavern) (69m; 9.3R/wk, 10% T    | 24  | 13-Sep-25   | 06-Oct-25   |   | <div></div> WB TBM Tunnelling CH9068-9137 (cavern) (69m; 9.3R/w   |                                       |                                       |
| WB TSS - Below Road Level Installation                     |  |   | 34          | 01-Aug-25   | 03-Sep-25   |   |                                       |                                       |
| Service Gallery Civil Provision                            |  |   | 18          | 16-Aug-25   | 03-Sep-25   |   |                                       |                                       |
| TC1100   | WB TSS - Service Gallery Civil Provision up to CP29            | 18  | 16-Aug-25   | 03-Sep-25   | <div></div> WB TSS - Service Gallery Civil Provision up to CP29                         |   |                                       |                                       |
| Low Point @ CP12   |  |   | 28          | 01-Aug-25   | 28-Aug-25   |   |                                       |                                       |
| TC11290  | WB TSS - Low Point Sump Pit waterproofing & testing (after TBM | 28  | 01-Aug-25   | 28-Aug-25   | <div></div> WB TSS - Low Point Sump Pit waterproofing & testing (after TBM dismantling) |   |                                       |                                       |
| WB TSS - Corbel  |  |   | 100         | 21-Jul-25 A | 28-Oct-25   |   |                                       |                                       |
| CP21-26  |  |   | 32          | 21-Jul-25 A | 21-Aug-25   |   |                                       |                                       |
| A229424160   | WB TSS - Corbel Structure & Curing at CP28                     | 17  | 21-Jul-25 A | 06-Aug-25   | <div></div> WB TSS - Corbel Structure & Curing at CP28                                  |   |                                       |                                       |
| TC11200  | WB TSS - Corbel Structure & Curing up to CH8875 (R1017W)       | 15  | 07-Aug-25   | 21-Aug-25   | <div></div> WB TSS - Corbel Structure & Curing up to CH8875 (R1017W)                    |   |                                       |                                       |
| CP26-31  |  |   | 4           | 18-Oct-25   | 21-Oct-25   |   |                                       |                                       |
| TC1930   | WB TSS - Corbel Structure up to CP29 (25m)                     | 4   | 18-Oct-25   | 21-Oct-25   |   |   | <div></div> WB TSS - Corbel Str       |                                       |
| Concrete curing time before ISSG arrival                   |  |   | 7           | 22-Oct-25   | 28-Oct-25   |   |                                       |                                       |
| TC1330   | WB TSS - Corbel Structure up to CP29 (concrete curing)         | 7   | 22-Oct-25   | 28-Oct-25   |   |   | <div></div> WB                        |                                       |
| WB TSS - OHVD  |  |   | 7           | 05-Aug-25   | 11-Aug-25   |   |                                       |                                       |
| TC11470  | WB TSS - OHVD from CH8530 to CP26                              | 4   | 05-Aug-25   | 08-Aug-25   | <div></div> WB TSS - OHVD from CH8530 to CP26   |   |                                       |                                       |
| TC11400  | WB TSS - OHVD up to CP"26.5" blocked by CP27 WB Tym            | 3   | 09-Aug-25   | 11-Aug-25   | <div></div> WB TSS - OHVD up to CP"26.5" blocked by CP27 WB Tym                         |   |                                       |                                       |
| WB TSS - Fire Board - Tunnel Crown with deletion up Ch8924 |  |   | 100         | 28-Jul-25 A | 05-Nov-25   |   |                                       |                                       |
| D12555   | WB TSS - Fire board - Tunnel Crown up to CP27                  | 7   | 28-Jul-25 A | 04-Aug-25   | <div></div> WB TSS - Fire board - Tunnel Crown up to CP27                               |   |                                       |                                       |
| D12565   | WB TSS - Fire board - Tunnel Crown up to CP28                  | 8   | 29-Oct-25   | 05-Nov-25   |   |   | <div></div>                           |                                       |
| WB TSS - Fire Board - Road level with deletion up Ch8924   |  |   | 268         | 21-Feb-25 A | 15-Nov-25   |   |                                       |                                       |
| TC11430  | WB TSS - Fire Board - Wall & OHVD Soffit from CP25 to CP26     | 268   | 21-Feb-25 A | 15-Nov-25   | <div></div>   |   |                                       |                                       |
| WB TSS - Road Barrier                                      |  |   | 86          | 01-Aug-25   | 25-Oct-25   |   |                                       |                                       |
| CPS  |  |   | 86          | 01-Aug-25   | 25-Oct-25   |   |                                       |                                       |
| A229447850   | WB TSS - Road Barrier CPS up to CP26                           | 6   | 01-Aug-25   | 08-Aug-25   | <div></div> WB TSS - Road Barrier CPS up to CP26  |   |                                       |                                       |
| A229447650   | WB TSS - Road Barrier CPS up to CP28                           | 6   | 07-Aug-25   | 14-Aug-25   | <div></div> WB TSS - Road Barrier CPS up to CP28  |   |                                       |                                       |



| Activity ID  | Activity Name  | Dur | Start       | Finish    | 2025   |  |   |
|--|--|-----|-------------|-----------|--|--|---|
|  |  |     |             |           | Aug  | Sep  | Oct   |
| A229447860   | WB TSS - Road Barrier CPS up to CP27                             | 6   | 14-Oct-25   | 21-Oct-25 |  |  | <div>WB TSS - Road Barrier CPS up to CP27</div>                 |
| TC1040   | WB TSS - Road Barrier CPS up to CP29                             | 4   | 22-Oct-25   | 25-Oct-25 |  |  | <div>WB TSS - Road Barrier CPS up to CP29</div>                 |
| NCPS   |  | 16  | 20-Sep-25   | 16-Oct-25 |  |  |   |
| A229446430   | WB TSS - Road Barrier NCPS up to CP26                            | 6   | 20-Sep-25   | 27-Sep-25 |  | <div>WB TSS - Road Barrier NCPS up to CP26</div> |   |
| A229446420   | WB TSS - Road Barrier NCPS up to CP27                            | 6   | 27-Sep-25   | 11-Oct-25 |  | <div>WB TSS - Road Barrier NCPS up to CP27</div> |   |
| A229425611   | WB TSS - Road Barrier NCPS up to CP28                            | 4   | 11-Oct-25   | 16-Oct-25 |  |  | <div>WB TSS - Road Barrier NCPS up to CP28</div>                |
| WB TSS - E&M Brackets                                    |  | 363 | 24-Nov-24 A | 21-Nov-25 |  |  |   |
| TC11030  | WB TSS - E&M Brackets up to CP26                                 | 143 | 02-Jul-25 A | 21-Nov-25 |  |  |   |
| NCPS   |  | 250 | 24-Nov-24 A | 01-Aug-25 |  |  |   |
| TC11460  | WB TSS - E&M Brackets NCPS from CH8450 to CP25                   | 250 | 24-Nov-24 A | 01-Aug-25 | <div>WB TSS - E&amp;M Brackets NCPS from CH8450 to CP25</div>                                  |  |   |
| Eastbound (EB)   |  | 711 | 26-Nov-23 A | 05-Nov-25 |  |  |   |
| EB TSS - TBM Temporary Services                          |  | 7   | 11-Oct-25   | 18-Oct-25 |  |  |   |
| TBM slurry pipe relocation                               |  | 7   | 11-Oct-25   | 18-Oct-25 |  |  |   |
| A229447680   | TSS - EB NCPS Wall Pipe Relocation from CP23 to CP24             | 7   | 11-Oct-25   | 18-Oct-25 |  |  | <div>TSS - EB NCPS Wall Pipe Relocation from CP23 to CP24</div> |
| EB TSS - Service Gallery                                 |  | 97  | 01-Aug-25   | 05-Nov-25 |  |  |   |
| CP21-26  |  | 97  | 01-Aug-25   | 05-Nov-25 |  |  |   |
| A229428552   | EB TSS - Service Gallery up to CP 25                             | 13  | 02-Sep-25   | 16-Sep-25 | <div>EB TSS - Service Gallery up to CP 25</div>  |  |   |
| A229428562   | EB TSS - Service Gallery up to CP 26                             | 13  | 17-Oct-25   | 01-Nov-25 |  |  | <div>EB TSS - Service Gallery up to CP 26</div>                 |
| Same Rate as TBM Excavation (Last SG 170m behind TBM CH) |  | 97  | 01-Aug-25   | 05-Nov-25 |  |  |   |
| EBTBM1380  | EB TSS - Service Gallery up to CH8473                            | 10  | 01-Aug-25   | 10-Aug-25 | <div>EB TSS - Service Gallery up to CH8473</div>   |  |   |
| EBTBM1390  | TRA: Stoppage 1 before Full Face Rock                            | 18  | 10-Aug-25   | 28-Aug-25 | <div>TRA: Stoppage 1 before Full Face Rock</div>   |  |   |
| EBTBM1400  | EB TSS - Service Gallery up to CH8484                            | 10  | 28-Aug-25   | 07-Sep-25 | <div>EB TSS - Service Gallery up to CH8484</div>   |  |   |
| EBTBM1410  | EB TSS - Service Gallery up to CH8495 (11m; 4.8R/wk) and allow   | 7   | 07-Sep-25   | 14-Sep-25 | <div>EB TSS - Service Gallery up to CH8495 (11m; 4.8R/wk) and allow start of CP25 EB Tym</div> |  |   |
| EBTBM1500  | EB TSS - Service Gallery up to CH8505 (10m; 4.8R/wk)             | 7   | 14-Sep-25   | 21-Sep-25 | <div>EB TSS - Service Gallery up to CH8505 (10m; 4.8R/wk)</div>                                |  |   |
| EBTBM1430  | EB TSS - Service Gallery up to CH8548 (43m; 4.8R/wk)             | 29  | 21-Sep-25   | 20-Oct-25 | <div>EB TSS - Service Gallery up to CH8548 (43m; 4.8R/wk)</div>                                |  |   |
| EBTBM1440  | EB TSS - Service Gallery up to CH8578                            | 16  | 20-Oct-25   | 05-Nov-25 |  |  | <div>EB TSS - Service Gallery up to CH8578</div>                |
| EB TSS - Below Road Level Installation                   |  | 193 | 17-Feb-25 A | 28-Aug-25 |  |  |   |
| Low Point Sump Pit                                       |  | 193 | 17-Feb-25 A | 28-Aug-25 |  |  |   |
| Low Point @ CP12   |  | 193 | 17-Feb-25 A | 28-Aug-25 |  |  |   |
| TC11330  | EB TSS - Low Point Sump Pit waterproofing & testing (after TBM c | 193 | 17-Feb-25 A | 28-Aug-25 | <div>EB TSS - Low Point Sump Pit waterproofing &amp; testing (after TBM dismantling)</div>     |  |   |
| EB TSS - Corbel  |  | 703 | 26-Nov-23 A | 28-Oct-25 |  |  |   |
| CP21-26  |  | 703 | 26-Nov-23 A | 28-Oct-25 |  |  |   |
| A229415982   | EB TSS - Corbel Stoppage at CP23                                 | 641 | 26-Nov-23 A | 27-Aug-25 | <div>EB TSS - Corbel Stoppage at CP23</div>  |  |   |
| A229415952   | EB TSS - Corbel Structure up to CP24                             | 8   | 18-Oct-25   | 28-Oct-25 |  |  | <div>EB TSS - Corbel Structure up to CP24</div>                 |
| EB TSS - OHVD  |  | 93  | 01-Aug-25   | 01-Nov-25 |  |  |   |
| TC305  | EB - ISSG Assembly (subject to ISSG availability)                | 14  | 01-Aug-25*  | 14-Aug-25 | <div>EB - ISSG Assembly (subject to ISSG availability)</div>                                   |  |   |
| CP21-26  |  | 4   | 28-Oct-25   | 01-Nov-25 |  |  |   |
| TC320  | EB TSS - OHVD up to CP24   | 4   | 28-Oct-25   | 01-Nov-25 |  |  | <div>EB TSS - OHVD up to CP24</div>                             |
| EB TSS - Road Barrier                                    |  | 8   | 28-Oct-25   | 05-Nov-25 |  |  |   |
| NCPS   |  | 8   | 28-Oct-25   | 05-Nov-25 |  |  |   |
| TC10160  | EB TSS - Road Barrier NCPS up to CP24                            | 8   | 28-Oct-25   | 05-Nov-25 |  |  | <div>EB TSS - Road Barrier NCPS up to CP24</div>                |
| 08 CKL Tunnel  |  | 340 | 25-Nov-24 A | 30-Oct-25 |  |  |   |
| Westbound (WB)   |  | 14  | 01-Aug-25   | 14-Aug-25 |  |  |   |
| WB CKL - Before TBM breakthrough                         |  | 14  | 01-Aug-25   | 14-Aug-25 |  |  |   |
| Westbound (WB) Civil Works                               |  | 14  | 01-Aug-25   | 14-Aug-25 |  |  |   |
| WB Type A  |  | 14  | 01-Aug-25   | 14-Aug-25 |  |  |   |
| E&M Brackets   |  | 14  | 01-Aug-25   | 14-Aug-25 |  |  |   |
| A229450100   | CKL WB - E&M Bracket up to CP32                                  | 14  | 01-Aug-25   | 14-Aug-25 | <div>CKL WB - E&amp;M Bracket up to CP32</div>   |  |   |
| WB EVB Portal  |  | 14  | 01-Aug-25   | 14-Aug-25 |  |  |   |
| A229450180   | CKL WB EVB Portal - Road Barrier                                 | 14  | 01-Aug-25   | 14-Aug-25 | <div>CKL WB EVB Portal - Road Barrier</div>  |  |   |
| Eastbound (EB)   |  | 340 | 25-Nov-24 A | 30-Oct-25 |  |  |   |

| Activity ID |   | Activity Name                                   | Dur         | Start       | Finish  | 2025 |     |     |
|-------------|---|---|-------------|-------------|---|------|-----|-----|
|             |   |   |             |             |   | Aug  | Sep | Oct |
|             |   | EB CKL - Before TBM breakthrough                | 340         | 25-Nov-24 A | 30-Oct-25   |      |     |     |
|             |   | Eastbound (EB) Structure Works                  | 284         | 25-Nov-24 A | 04-Sep-25   |      |     |     |
|             |   | EB Type C                                       | 212         | 25-Nov-24 A | 14-Aug-25   |      |     |     |
|             |   | OHVD  | 212         | 25-Nov-24 A | 14-Aug-25   |      |     |     |
| A2050       | EB Type C - OHVD Formwork Modification & Relocation     | 212   | 25-Nov-24 A | 14-Aug-25   | EB Type C - OHVD Formwork Modification & Relocation     |      |     |     |
|             |   | EB Type A D&Br                                  | 21          | 15-Aug-25   | 04-Sep-25   |      |     |     |
|             |   | OHVD  | 21          | 15-Aug-25   | 04-Sep-25   |      |     |     |
| A1800       | EB D&Br - A1 OHVD Bay 5                                 | 21  | 15-Aug-25   | 04-Sep-25   | EB D&Br - A1 OHVD Bay 5                                 |      |     |     |
|             |   | Eastbound (EB) Civil Works                      | 92          | 31-Jul-25 A | 30-Oct-25   |      |     |     |
|             |   | EB Type A                                       | 77          | 15-Aug-25   | 30-Oct-25   |      |     |     |
| A8980       | CKL EB Type A - E&M Bracket                             | 39  | 15-Aug-25   | 22-Sep-25   | CKL EB Type A - E&M Bracket                             |      |     |     |
| A229444530  | EB - Type A - Road Barrier                              | 36  | 10-Sep-25   | 30-Oct-25   |   |      |     |     |
|             |   | EB Type C                                       | 81          | 31-Jul-25 A | 19-Oct-25   |      |     |     |
| A229444520  | CKL EB Type C2/C3 - Road Barrier                        | 42  | 31-Jul-25 A | 10-Sep-25   | CKL EB Type C2/C3 - Road Barrier                        |      |     |     |
| A229450140  | CKL EB Type C - MIMEP module installation               | 6   | 01-Aug-25   | 06-Aug-25   | CKL EB Type C - MIMEP module installation               |      |     |     |
| A229450120  | CKL EB Type C2/C3 - Black paint                         | 7   | 10-Sep-25   | 17-Sep-25   | CKL EB Type C2/C3 - Black paint                         |      |     |     |
| A229450110  | CKL EB Type C2/C3 - E&M Bracket                         | 27  | 23-Sep-25   | 19-Oct-25   | CKL EB Type C2/C3 - E&M Bracket                         |      |     |     |
|             |   | EB Type A D&Br                                  | 36          | 01-Aug-25   | 15-Sep-25   |      |     |     |
| A229444700  | EB Type A Dr&BI - MIMEP module installation             | 36  | 01-Aug-25   | 15-Sep-25   | EB Type A Dr&BI - MIMEP module installation             |      |     |     |
|             |   | EB EVB Portal                                   | 21          | 01-Aug-25   | 21-Aug-25   |      |     |     |
| A229450150  | CKL EB EVB Portal - Road Barrier                        | 21  | 01-Aug-25   | 21-Aug-25   | CKL EB EVB Portal - Road Barrier                        |      |     |     |
| A229450160  | CKL EB EVB Portal - Black paint                         | 7   | 01-Aug-25   | 07-Aug-25   | CKL EB EVB Portal - Black paint                         |      |     |     |
|             |   | 09 Cross Passages                               | 176         | 01-Aug-25   | 23-Jan-26   |      |     |     |
|             |   | Cross Passages @ TSS & CKL Tunnel (CP7 to CP33) | 176         | 01-Aug-25   | 23-Jan-26   |      |     |     |
|             |   | CP25 by Mini TBM                                | 105         | 14-Sep-25   | 28-Dec-25   |      |     |     |
| TD0100      | CP25 - EB - Tympanum Civil works CH8489                 | 27  | 14-Sep-25   | 11-Oct-25   | CP25 - EB - Tympanum Civil works CH8489                 |      |     |     |
| A7950       | CP25 - CP TBM cycle                                     | 18  | 11-Oct-25   | 29-Oct-25   | CP25 - CP TBM cycle                                     |      |     |     |
| A8260       | CP25 - Internal & Collar Structure & ABWF               | 60  | 29-Oct-25   | 28-Dec-25   | CP25 - Internal & Collar Structure & ABWF               |      |     |     |
|             |   | CP27 by Mini TBM                                | 27          | 17-Sep-25   | 14-Oct-25   |      |     |     |
| TD0310      | CP27 - WB - Tympanum Civil works CH8688 R0936W          | 27  | 17-Sep-25   | 14-Oct-25   | CP27 - WB - Tympanum Civil works CH8688 R0936W          |      |     |     |
|             |   | CP28 by D&Br                                    | 94          | 01-Aug-25   | 02-Nov-25   |      |     |     |
| TD1030      | CP28 - WB - Sawcut and breakin                          | 6   | 01-Aug-25   | 06-Aug-25   | CP28 - WB - Sawcut and breakin                          |      |     |     |
| TD1250      | CP28 - Advance excavation from WB (15m Length; 0.17m/d) | 88  | 07-Aug-25   | 02-Nov-25   | CP28 - Advance excavation from WB (15m Length; 0.17m/d) |      |     |     |
|             |   | CP29 by D&Br                                    | 133         | 13-Sep-25   | 23-Jan-26   |      |     |     |
| TD1310      | CP29 - WB - Temporary Platform setup & Tympanum         | 35  | 13-Sep-25   | 17-Oct-25   | CP29 - WB - Temporary Platform setup & Tympanum         |      |     |     |
| TD1320      | CP29 - WB - Sawcut and break in                         | 6   | 22-Oct-25   | 27-Oct-25   | CP29 - WB - Sawcut and break in                         |      |     |     |
| TD1330      | CP29 - excavation from WB                               | 88  | 28-Oct-25   | 23-Jan-26   | CP29 - excavation from WB                               |      |     |     |
|             |   | CP32 by D&BI                                    | 78          | 01-Aug-25   | 17-Oct-25   |      |     |     |
| A229438446  | CP32 - Backfill   | 26  | 01-Aug-25   | 26-Aug-25   | CP32 - Backfill   |      |     |     |
| A229438436  | CP32 - Lining Structure                                 | 26  | 27-Aug-25   | 21-Sep-25   | CP32 - Lining Structure                                 |      |     |     |
| A229422590  | CP32 - Collar   | 26  | 22-Sep-25   | 17-Oct-25   | CP32 - Collar   |      |     |     |
|             |   | CP33 by D&BI                                    | 133         | 01-Aug-25   | 11-Dec-25   |      |     |     |
| A1900       | CP33 - Rock Plug Excavation Preparation Works           | 40  | 01-Aug-25   | 09-Sep-25   | CP33 - Rock Plug Excavation Preparation Works           |      |     |     |
| A1710       | CP33 - Rock Plug Excavation                             | 26  | 10-Sep-25   | 05-Oct-25   | CP33 - Rock Plug Excavation                             |      |     |     |
| A1720       | CP33 - CP33/Type E Junction                             | 67  | 06-Oct-25   | 11-Dec-25   | CP33 - CP33/Type E Junction                             |      |     |     |
|             |   | 10 East Ventilation Building - EVB              | 653         | 15-Mar-24 A | 27-Dec-25   |      |     |     |
|             |   | E&M Works (by BYME)                             | 453         | 15-Mar-24 A | 23-Sep-25   |      |     |     |
| EVB1210     | EVB - E&M works (B/F)                                   | 410   | 15-Mar-24 A | 04-Aug-25   | EVB - E&M works (B/F)                                   |      |     |     |
| EVB1300     | EVB - E&M works (LG3/F)                                 | 385   | 26-Apr-24 A | 12-Aug-25   | EVB - E&M works (LG3/F)                                 |      |     |     |
| EVB1360     | EVB - E&M works (LG2/F)                                 | 356   | 21-May-24 A | 01-Aug-25   | EVB - E&M works (LG2/F)                                 |      |     |     |
| EVB1440     | EVB - E&M works (LG1/F)                                 | 340   | 10-Jul-24 A | 29-Aug-25   | EVB - E&M works (LG1/F)                                 |      |     |     |

| Activity ID   |          | Activity Name   | Dur | Start       | Finish    | 2025  |     |     |
|---|----------|---|-----|-------------|-----------|---|-----|-----|
|   |          |   |     |             |           | Aug   | Sep | Oct |
|   | EVB1500  | EVB - E&M works (G/F)   | 337 | 07-Aug-24 A | 23-Sep-25 | EVB - E&M works (G/F)   |     |     |
| EVB Remaining Works (TBC)   |          |   | 198 | 13-Jun-25 A | 27-Dec-25 |   |     |     |
| Facade works  |          |   | 138 | 13-Jun-25 A | 28-Oct-25 |   |     |     |
|   | EVB1606  | EVB - Aluminium Fins Installation   | 138 | 13-Jun-25 A | 28-Oct-25 | EVB - Aluminium Fins Installation   |     |     |
| Logistic Deck & Tower Crane Removal                               |          |   | 15  | 29-Oct-25   | 12-Nov-25 |   |     |     |
|   | EVB1621  | EVB - Tower Crane TC2 Removal TC2   | 15  | 29-Oct-25   | 12-Nov-25 |   |     |     |
| Landscape works   |          |   | 60  | 29-Oct-25   | 27-Dec-25 |   |     |     |
|   | EVB1650  | EVB - Landscape - Above G/F   | 60  | 29-Oct-25   | 27-Dec-25 |   |     |     |
| VO - Recovery Vehicle Base (RVB) Construction                     |          |   | 45  | 01-Aug-25   | 14-Sep-25 |   |     |     |
|   | EVB1810  | RVB - Rock Excavation & Site Formation                                    | 45  | 01-Aug-25   | 14-Sep-25 | RVB - Rock Excavation & Site Formation                                    |     |     |
| 11 Tunnel E &M Installation                                       |          |   | 262 | 01-May-25 A | 17-Jan-26 |   |     |     |
| WB - E&M Works  |          |   | 90  | 01-Aug-25   | 29-Oct-25 |   |     |     |
| WB - LV Cabling & LV Power On                                     |          |   | 90  | 01-Aug-25   | 29-Oct-25 |   |     |     |
|   | TF170    | WB CKL - CP32-EVB Portal E&M installation                                 | 90  | 01-Aug-25*  | 29-Oct-25 | WB CKL - CP32-EVB Portal E&M installation                                 |     |     |
|   | E&MC1180 | 01b. WB SUS CP1 to CP12 - E&M Installation (Final Stage)                  | 60  | 29-Aug-25   | 28-Oct-25 | 01b. WB SUS CP1 to CP12 - E&M Installation (Final Stage)                  |     |     |
| EB - E&M Works  |          |   | 262 | 01-May-25 A | 17-Jan-26 |   |     |     |
| EB - LV Cabling & LV Power On                                     |          |   | 262 | 01-May-25 A | 17-Jan-26 |   |     |     |
|   | E&MC1080 | 02. EB TSS - CP12-16 E&M installation                                     | 92  | 01-May-25 A | 01-Aug-25 | 02. EB TSS - CP12-16 E&M installation                                     |     |     |
|   | E&MC1150 | 01b. EB SUS to TSS CP12 - E&M Installation (Final Stage)                  | 60  | 13-Sep-25   | 12-Nov-25 | 01b. EB SUS to TSS CP12 - E&M Installation (Final Stage)                  |     |     |
|   | E&MC1130 | 11. EB CKL - CP31 to EVB Portal - E&M installation                        | 90  | 19-Oct-25   | 17-Jan-26 | 11. EB CKL - CP31 to EVB Portal - E&M installation                        |     |     |
|   | E&MC1140 | 12. EB CKL - BT & S01 - E&M installation                                  | 90  | 19-Oct-25   | 17-Jan-26 | 12. EB CKL - BT & S01 - E&M installation                                  |     |     |
| 14 Projectwide Final Works  |          |   | 283 | 29-Jan-25 A | 07-Nov-25 |   |     |     |
| Tunnel Cladding   |          |   | 283 | 29-Jan-25 A | 07-Nov-25 |   |     |     |
| Eastbound   |          |   | 261 | 29-Jan-25 A | 16-Oct-25 |   |     |     |
| Typical Subframe & Cladding                                       |          |   | 261 | 29-Jan-25 A | 16-Oct-25 |   |     |     |
| EB CPS  |          |   | 24  | 28-Aug-25   | 20-Sep-25 |   |     |     |
|   | VE10220  | 1. VE Panel - EB SUS (CPS) 400m   | 24  | 28-Aug-25   | 20-Sep-25 | 1. VE Panel - EB SUS (CPS) 400m   |     |     |
| EB NCPS   |          |   | 261 | 29-Jan-25 A | 16-Oct-25 |   |     |     |
|   | VE10601  | 4. VE Panel - EB TSS CP12-17 (NCPS) 500m                                  | 237 | 29-Jan-25 A | 22-Sep-25 | 4. VE Panel - EB TSS CP12-17 (NCPS) 500m                                  |     |     |
|   | VE10571  | 1. VE Panel - EB SUS (NCPS) 400m  | 24  | 21-Sep-25   | 14-Oct-25 | 1. VE Panel - EB SUS (NCPS) 400m  |     |     |
|   | VE10611  | 5. VE Panel - EB TSS CP17-21 (NCPS) 400m                                  | 24  | 23-Sep-25   | 16-Oct-25 | 5. VE Panel - EB TSS CP17-21 (NCPS) 400m                                  |     |     |
| Westbound   |          |   | 266 | 15-Feb-25 A | 07-Nov-25 |   |     |     |
| Typical Subframe & Cladding                                       |          |   | 266 | 15-Feb-25 A | 07-Nov-25 |   |     |     |
| WB CPS  |          |   | 24  | 15-Oct-25   | 07-Nov-25 |   |     |     |
|   | VE10021  | 1. VE Panel - WB SUS (CPS) 400m   | 24  | 15-Oct-25*  | 07-Nov-25 | 1. VE Panel - WB SUS (CPS) 400m   |     |     |
|   | VE10022  | 2. VE Panel - WB LSCC to CP7 (CPS) 150m                                   | 10  | 28-Oct-25   | 07-Nov-25 | 2. VE Panel - WB LSCC to CP7 (CPS) 150m                                   |     |     |
| WB NCPS   |          |   | 201 | 15-Feb-25 A | 03-Sep-25 |   |     |     |
|   | VE10701  | 4. VE Panel - WB TSS CP12-17 (NCPS) 500m (subject to GTECH h/o End Jun25) | 177 | 15-Feb-25 A | 10-Aug-25 | 4. VE Panel - WB TSS CP12-17 (NCPS) 500m (subject to GTECH h/o End Jun25) |     |     |
|   | VE10731  | 5. VE Panel - WB TSS CP17-23 (NCPS) 600m                                  | 24  | 10-Aug-25*  | 03-Sep-25 | 5. VE Panel - WB TSS CP17-23 (NCPS) 600m                                  |     |     |
| Tunnel Pavement   |          |   | 30  | 01-Aug-25   | 30-Aug-25 |   |     |     |
| Westbound   |          |   | 30  | 01-Aug-25   | 30-Aug-25 |   |     |     |
|   | AGR10090 | Pavement - WB Initial Layers CP1 to CP18                                  | 30  | 01-Aug-25   | 30-Aug-25 | Pavement - WB Initial Layers CP1 to CP18                                  |     |     |
| Infrastructure Works  |          |   | 307 | 07-Jan-25 A | 10-Nov-25 |   |     |     |
| 06 Road S20   |          |   | 131 | 31-Mar-25 A | 23-Sep-25 |   |     |     |
| Addition of Planter (Non Critical)                                |          |   | 109 | 31-Mar-25 A | 26-Aug-25 |   |     |     |
|   | A1140    | S20 - Construction of Remaining Planter                                   | 109 | 31-Mar-25 A | 26-Aug-25 | S20 - Construction of Remaining Planter                                   |     |     |
| Run-in Remaining Works  |          |   | 107 | 08-May-25 A | 23-Sep-25 |   |     |     |
|   | A1100    | S20 - Run-in Remaining Works  | 107 | 08-May-25 A | 23-Sep-25 | S20 - Run-in Remaining Works  |     |     |
| VO - Modification of Irrigation System at Charging Station Run-in |          |   | 12  | 01-Aug-25   | 15-Aug-25 |   |     |     |
|   | A1070    | S20 - Shrubs Reinstatement (Non Critical)                                 | 12  | 01-Aug-25   | 15-Aug-25 | S20 - Shrubs Reinstatement (Non Critical)                                 |     |     |
| 07 Road L10(N)  |          |   | 213 | 01-Mar-25 A | 29-Sep-25 |   |     |     |

| Activity ID | Activity Name   | Dur | Start       | Finish    | 2025 |     |   |
|-------------|---|-----|-------------|-----------|------|-----|---|
|             |   |     |             |           | Aug  | Sep | Oct   |
|             | <b>L10(N) Landscape (KD-26)</b>                           | 26  | 30-Aug-25   | 29-Sep-25 |      |     |   |
| LN10110     | L10(N) - Landscape softwork (TBC)                         | 26  | 30-Aug-25   | 29-Sep-25 |      |     | L10(N) - Landscape softwork (TBC)             |
|             | <b>L10(N) Remaining works</b>                             | 57  | 01-Aug-25   | 26-Sep-25 |      |     |   |
| LN10100     | Road L10N - Drainage T&C                                  | 21  | 01-Aug-25   | 21-Aug-25 |      |     |   |
| LN10150     | Road L10N - Final Paving works & Road Marking             | 20  | 07-Sep-25   | 26-Sep-25 |      |     | Road L10N - Final Paving works & Road Marking |
|             | <b>L10 (N) Remaining Road Works (Subject to Manpower)</b> | 145 | 01-Mar-25 A | 06-Sep-25 |      |     |   |
| A229450270  | L10 (N) - Remaining Road Signage                          | 136 | 01-Mar-25 A | 27-Aug-25 |      |     |   |
| A229450280  | L10 (N) - Remaining Road Lighting                         | 30  | 01-Aug-25   | 06-Sep-25 |      |     |   |
|             | <b>08 Road L10(S) &amp; L18</b>                           | 296 | 07-Jan-25 A | 29-Oct-25 |      |     |   |
|             | <b>L10(S) &amp; L18 Landscape (KD-24)</b>                 | 25  | 01-Aug-25   | 29-Aug-25 |      |     |   |
| A229445710  | L10 (S) & L18 - Landscape softwork (TBC)                  | 25  | 01-Aug-25*  | 29-Aug-25 |      |     |   |
|             | <b>L10(S) &amp; L18 Remaining works</b>                   | 90  | 01-Aug-25   | 29-Oct-25 |      |     |   |
|             | <b>Roadside Area adjacent to L10(S)</b>                   | 90  | 01-Aug-25   | 29-Oct-25 |      |     |   |
|             | <b>Roadworks</b>  | 30  | 01-Aug-25   | 30-Aug-25 |      |     |   |
| A229448810  | Roadside Area adjacent to L10S - Road works               | 30  | 01-Aug-25*  | 30-Aug-25 |      |     |   |
|             | <b>Landscape</b>  | 30  | 30-Sep-25   | 29-Oct-25 |      |     |   |
| A229448820  | Roadside Area adjacent to L10S - Landscape (TBC)          | 30  | 30-Sep-25   | 29-Oct-25 |      |     |   |
|             | <b>Miscellaneous Road Works</b>                           | 161 | 07-Jan-25 A | 06-Aug-25 |      |     |   |
| A1190       | L10 (S) Carriageway - Construction of Remaining Islands   | 161 | 07-Jan-25 A | 06-Aug-25 |      |     |   |
|             | <b>Preparation for Road Opening (L10S)</b>                | 75  | 26-Apr-25 A | 02-Aug-25 |      |     |   |
| A229450210  | L10 (S) Carriageway - Final Paving Works & Road Marking   | 75  | 26-Apr-25 A | 02-Aug-25 |      |     |   |
|             | <b>10 Lam Chak Street / Kai Hing Road Modification</b>    | 30  | 11-Oct-25   | 10-Nov-25 |      |     |   |
|             | <b>LCS/KHR Modification (KD-19)</b>                       | 30  | 11-Oct-25   | 10-Nov-25 |      |     |   |
|             | <b>VO -Additional Raod Lighting at Stage 1 Area</b>       | 30  | 11-Oct-25   | 10-Nov-25 |      |     |   |
| A229450080  | VO - Additional Road Lighting installation                | 30  | 11-Oct-25   | 10-Nov-25 |      |     |   |



CONTRACT NO. ED/2020/03

TRUNK ROAD T2

TRAFFIC CONTROL SURVEILLANCE SYSTEM AND ASSOCIATED WORKS

THREE MONTH ROLLING PROGRAMME

Appendix III B - Three Month Rolling Programme

| Activity ID  | Activity Name  | Original Duration | Early Start | Early Finish | Late Start | Late Finish | Actual Start | Actual Finish | Predecessor Details  | 2025 |     |     |     |
|--|--|-------------------|-------------|--------------|------------|-------------|--------------|---------------|--|------|-----|-----|-----|
|  |  |                   |             |              |            |             |              |               |  | Jul  | Aug | Sep | Oct |
|  |  |                   |             |              |            |             |              |               |  | 43   | 44  | 45  | 46  |
| Trunk Road T2 - Traffic Control & Surveillance System & Associated Works |  | 814               | 01-Aug-25   | 01-Jun-26    | 19-Feb-24  | 31-Oct-26   | 10-Aug-23    |               |  |      |     |     |     |
| Access Dates   |  | 75                | 01-Aug-25   | 15-Oct-25    | 02-Apr-24  | 15-May-25   |              |               |  |      |     |     |     |
| AC1010b  | Portion 2 - LSCC to CP7 (NCP Side) - WB                                  | 0                 | 01-Aug-25   |              | 02-Oct-24  |             |              |               |  |      |     |     |     |
| AC1010c  | Portion 2 - LSCC to CP7 (Under OHVD) - WB                                | 0                 | 01-Aug-25   |              | 15-May-25  |             |              |               |  |      |     |     |     |
| AC1010d  | Portion 2 - LSCC to CP7 (VSLS Signage Anchors & Niche Cabinet) - EB & WB | 0                 | 01-Aug-25   |              | 28-Jan-25  |             |              |               |  |      |     |     |     |
| AC1010f  | Portion 2 - LSCC to CP7 (CP Side) - EB                                   | 0                 | 01-Aug-25   |              | 02-Oct-24  |             |              |               |  |      |     |     |     |
| AC1010g  | Portion 2 - LSCC to CP7 (Under OHVD) - EB                                | 0                 | 01-Aug-25   |              | 15-May-25  |             |              |               |  |      |     |     |     |
| AC1010h  | Portion 2 - LSCC to CP7 (NCP Side) - EB                                  | 0                 | 01-Aug-25   |              | 02-Oct-24  |             |              |               |  |      |     |     |     |
| AC1020   | Portion 3 - CKL Branch Tunnel in TKO-LTT Site                            | 0                 | 01-Aug-25   |              | 23-Aug-24  |             |              |               |  |      |     |     |     |
| AC1030   | Portion 4 - TKO-LTT (LT Interchange)                                     | 0                 | 01-Aug-25   |              | 02-Apr-24  |             |              |               |  |      |     |     |     |
| AC1040   | Underpass S21  | 0                 | 01-Aug-25   |              | 16-Jan-25  |             |              |               |  |      |     |     |     |
| AC1050i  | Portion 2 - LS - CKL Tunnel CP7 to CP11 (Niche cabinet) - EB             | 0                 | 01-Aug-25   |              | 15-Feb-25  |             |              |               |  |      |     |     |     |
| AC1050j  | Portion 2 - LS - CKL Tunnel CP7 to CP11 (Niche cabinet) - WB             | 0                 | 01-Aug-25   |              | 31-Jan-25  |             |              |               |  |      |     |     |     |
| AC1060i  | Portion 2 - LS - CKL Tunnel CP11 to CP16 (Niche Cabinet) - EB & WB       | 0                 | 01-Aug-25   |              | 15-May-25  |             |              |               |  |      |     |     |     |
| AC1070i  | Portion 2 - LS - CKL Tunnel CP16 to CP21 (Niche Cabinet) - EB & WB       | 0                 | 01-Aug-25   |              | 18-Nov-24  |             |              |               |  |      |     |     |     |
| AC1080b  | Portion 2 - LS - CKL Tunnel CP24 to CP26 (Service Gallery) - EB          | 0                 | 01-Aug-25   |              | 13-Feb-25  |             |              |               |  |      |     |     |     |
| AC1080f  | Portion 2 - LS - CKL Tunnel CP24 to CP26 (Road Level) - WB               | 0                 | 01-Aug-25   |              | 20-Sep-24  |             |              |               |  |      |     |     |     |
| AC1080h  | Portion 2 - LS - CKL Tunnel CP21 to CP24 (VSLS Signage Anchor) - WB      | 0                 | 01-Aug-25   |              | 25-Jan-25  |             |              |               |  |      |     |     |     |
| AC1080i  | Portion 2 - LS - CKL Tunnel CP21 to CP24 (Niche Cabinet) - WB            | 0                 | 01-Aug-25   |              | 14-Feb-25  |             |              |               |  |      |     |     |     |
| AC1090d  | Portion 2 - LS - CKL Tunnel CP26 to CP30 (Service Gallery) - WB          | 0                 | 01-Aug-25   |              | 19-Dec-24  |             |              |               |  |      |     |     |     |
| AC1090e  | Portion 2 - LS - CKL Main Tunnel CP29 to CP32 (Road Level) - EB          | 0                 | 01-Aug-25   |              | 02-Sep-24  |             |              |               |  |      |     |     |     |
| AC1090f  | Portion 2 - LS - CKL Main Tunnel CP29 to CP32 (Service Gallery) - EB     | 0                 | 01-Aug-25   |              | 21-Jan-25  |             |              |               |  |      |     |     |     |
| AC1090g  | Portion 2 - LS - CKL Main Tunnel CP30 to CP32 (Road Level) - WB          | 0                 | 01-Aug-25   |              | 17-Sep-24  |             |              |               |  |      |     |     |     |
| AC1090h  | Portion 2 - LS - CKL Main Tunnel CP30 to CP32 (Service Gallery) - WB     | 0                 | 01-Aug-25   |              | 21-Jan-25  |             |              |               |  |      |     |     |     |
| AC1090c  | Portion 2 - LS - CKL Tunnel CP26 to CP30 (Road Level) - WB               | 0                 | 15-Aug-25   |              | 27-Aug-24  |             |              |               |  |      |     |     |     |
| AC1080a  | Portion 2 - LS - CKL Tunnel CP21 to CP26 (Road Level) - EB               | 0                 | 15-Sep-25   |              | 09-Sep-24  |             |              |               |  |      |     |     |     |
| AC1090a  | Portion 2 - LS - CKL Tunnel CP26 to CP29 (Road Level) - EB               | 0                 | 15-Sep-25   |              | 07-Sep-24  |             |              |               |  |      |     |     |     |
| AC1120a  | Portion 2 - LS - CKL Final Connection (Service Gallery) - WB             | 0                 | 15-Sep-25   |              | 01-Mar-25  |             |              |               |  |      |     |     |     |
| AC1120   | Portion 2 - LS - CKL Final Connection (Road Level) - WB                  | 0                 | 30-Sep-25   |              | 25-Sep-24  |             |              |               |  |      |     |     |     |
| AC1090b  | Portion 2 - LS - CKL Tunnel CP26 to CP29 (Service Gallery) - EB          | 0                 | 15-Oct-25   |              | 17-Jan-25  |             |              |               |  |      |     |     |     |
| Milestones of Contract T2  |  | 0                 | 01-Aug-25   | 01-Aug-25    | 27-Mar-25  | 27-Mar-25   |              |               |  |      |     |     |     |
| KD1050   | Commencement of Project-wide FSD Inspection - Contract T2                | 0                 | 01-Aug-25   |              | 27-Mar-25  |             |              |               |  |      |     |     |     |
| Summary by Cost Center   |  | 527               | 01-Aug-25   | 01-Jun-26    | 19-Feb-24  | 30-May-25   | 01-Apr-24    |               |  |      |     |     |     |
| Cost Center B - Central System   |  | 108               | 01-Aug-25   | 08-Dec-25    | 16-Aug-24  | 11-Apr-25   |              |               |  |      |     |     |     |
| SC1090   | SAT Plan Submission & Approval for Central System                        | 78                | 01-Aug-25   | 03-Nov-25    | 07-Jan-25  | 11-Apr-25   |              |               | DS3500: SS   |      |     |     |     |
| SC1080   | Site Installation of Central System                                      | 95                | 16-Aug-25   | 08-Dec-25    | 16-Aug-24  | 22-Jan-25   |              |               | SW1100: SS, SW1120: SS, SW1960: SS, SW1090: SS, SW1670: SS, SW1770: SS |      |     |     |     |



| Activity ID   | Activity Name  | Original Duration | Early Start | Early Finish | Late Start | Late Finish | Actual Start | Actual Finish | Predecessor Details                | 2025      |           |           |           |
|---|--|-------------------|-------------|--------------|------------|-------------|--------------|---------------|------------------------------------|-----------|-----------|-----------|-----------|
|   |  |                   |             |              |            |             |              |               |                                    | Jul<br>43 | Aug<br>44 | Sep<br>45 | Oct<br>46 |
| Cost Center C - Traffic Control Devices                     |  | 442               | 01-Aug-25   | 14-Mar-26    | 11-Jul-24  | 29-May-25   | 23-Sep-24    |               |                                    |           |           |           |           |
| SC1200  | SCT Plan Submission & Approval for Traffic Control Devices                           | 0                 | 01-Aug-25   | 09-Sep-25    | 23-Sep-24  | 22-Feb-25   | 23-Sep-24    |               | DS2980: SS                         |           |           |           |           |
| SC1220  | SAT Plan Submission & Approval for Traffic Control Devices                           | 84                | 01-Aug-25   | 10-Nov-25    | 30-Dec-24  | 11-Apr-25   |              |               | DS3540: SS                         |           |           |           |           |
| SC1210  | Site Installation of Traffic Control Devices   | 166               | 25-Aug-25   | 14-Mar-26    | 11-Jul-24  | 29-May-25   |              |               | SW1110: SS                         |           |           |           |           |
| Cost Center D - Communication System                        |  | 310               | 01-Aug-25   | 09-Dec-25    | 16-Aug-24  | 22-Jan-25   | 28-Nov-24    |               |                                    |           |           |           |           |
| SC1350  | SAT Plan Submission & Approval for Communication System                              | 0                 | 01-Aug-25   | 09-Sep-25    | 28-Nov-24  | 31-Dec-24   | 28-Nov-24    |               | DS3580: SS                         |           |           |           |           |
| SC1330  | Site Installation of Communication System  | 38                | 25-Oct-25   | 09-Dec-25    | 16-Aug-24  | 22-Jan-25   |              |               | SW1100: SS, SW1120: SS, SW1960: SS |           |           |           |           |
| Cost Center E - CCTV System                                 |  | 306               | 01-Aug-25   | 24-Nov-25    | 13-Sep-24  | 29-May-25   | 18-Nov-24    |               |                                    |           |           |           |           |
| SC1480  | SAT Plan Submission & Approval for CCTV System                                       | 0                 | 01-Aug-25   | 11-Sep-25    | 18-Nov-24  | 28-Mar-25   | 18-Nov-24    |               | DS3620: SS                         |           |           |           |           |
| SC1470  | Site Installation of CCTV System   | 76                | 25-Aug-25   | 24-Nov-25    | 13-Sep-24  | 29-May-25   |              |               | SW1060: SS, SW1940: SS             |           |           |           |           |
| Cost Center F - PABX System                                 |  | 474               | 01-Aug-25   | 01-Jun-26    | 30-Dec-24  | 21-May-25   | 01-Nov-24    |               |                                    |           |           |           |           |
| SC1610  | SAT Plan Submission & Approval for PABX System                                       | 0                 |             |              |            |             | 01-Nov-24    | 04-Jul-25     | DS3660: SS                         |           |           |           |           |
| SC1590  | Site Installation of PABX System   | 120               | 01-Aug-25   | 11-Nov-25    | 30-Dec-24  | 07-Apr-25   | 30-Dec-24    |               | SW2380: SS                         |           |           |           |           |
| SC1620  | SCT of PABX System   | 241               | 12-Aug-25   | 01-Jun-26    | 28-Jan-25  | 21-May-25   |              |               | SW2770: SS, SW2770a: SS            |           |           |           |           |
| Cost Center G - ET System                                   |  | 251               | 01-Aug-25   | 30-Oct-25    | 27-Dec-24  | 21-Apr-25   | 27-Dec-24    |               |                                    |           |           |           |           |
| SC1740  | SAT Plan Submission & Approval for ET System   | 0                 | 01-Aug-25   | 09-Sep-25    | 27-Dec-24  | 21-Apr-25   | 27-Dec-24    |               | DS3700: SS                         |           |           |           |           |
| SC1720  | Site Installation of ET System   | 74                | 01-Aug-25   | 30-Oct-25    | 15-Feb-25  | 22-Feb-25   | 15-Feb-25    |               | SW2340: SS                         |           |           |           |           |
| Cost Center H - PA System                                   |  | 190               | 01-Aug-25   | 30-Oct-25    | 01-Nov-24  | 07-May-25   | 01-Nov-24    |               |                                    |           |           |           |           |
| SC1860  | Site Installation of PA System   | 130               | 01-Aug-25   | 30-Oct-25    | 01-Nov-24  | 31-Mar-25   | 01-Nov-24    |               | SW2370: SS, SW3170: FS             |           |           |           |           |
| SC1870  | SAT Plan Submission & Approval for PA System   | 0                 | 01-Aug-25   | 09-Sep-25    | 18-Nov-24  | 07-May-25   | 18-Nov-24    |               | DS3740: SS                         |           |           |           |           |
| Cost Center I - Radio System                                |  | 378               | 01-Aug-25   | 05-Dec-25    | 22-Apr-24  | 21-Apr-25   | 03-Sep-24    |               |                                    |           |           |           |           |
| SC1980  | SCT Plan Submission & Approval for Radio System                                      | 0                 |             |              |            |             | 03-Sep-24    | 30-Jun-25     | DS3220: SS                         |           |           |           |           |
| SC2000  | SAT Plan Submission & Approval for Radio System                                      | 84                | 01-Aug-25   | 11-Oct-25    | 21-Apr-25  | 21-Apr-25   | 04-Jul-25    |               | DS3780: SS                         |           |           |           |           |
| SC1930  | Installation Drawing Preparation, Submission & Approval for Radio System             | 60                | 01-Aug-25   | 11-Oct-25    | 22-Apr-24  | 06-Feb-25   |              |               | DS6130: SS                         |           |           |           |           |
| SC1990  | Site Installation of Radio System  | 92                | 18-Aug-25   | 05-Dec-25    | 12-Nov-24  | 22-Feb-25   |              |               | SW2390: SS                         |           |           |           |           |
| Cost Center J - Detection System                            |  | 399               | 01-Aug-25   | 03-Mar-26    | 31-Aug-24  | 30-May-25   | 02-Nov-24    |               |                                    |           |           |           |           |
| SC2110  | SCT Plan Submission & Approval for Detection System                                  | 0                 | 01-Aug-25   | 09-Sep-25    | 02-Nov-24  | 17-Jan-25   | 02-Nov-24    |               | DS3260: SS                         |           |           |           |           |
| SC2130  | SAT Plan Submission & Approval for Detection System                                  | 84                | 01-Aug-25   | 10-Nov-25    | 04-Jan-25  | 16-Apr-25   |              |               | DS3820: SS                         |           |           |           |           |
| SC2120  | Site Installation of Detection System  | 156               | 25-Aug-25   | 03-Mar-26    | 31-Aug-24  | 30-May-25   |              |               | SW1070: SS, SW1250: SS             |           |           |           |           |
| Cost Center K - Manual Fallback System                      |  | 258               | 01-Aug-25   | 10-Nov-25    | 12-Nov-24  | 22-Feb-25   | 31-Dec-24    |               |                                    |           |           |           |           |
| SC2240  | Site Installation of Manual Fallback System  | 0                 | 01-Aug-25   | 21-Oct-25    | 25-Nov-24  | 25-Nov-24   | 31-Dec-24    |               | EM1110: FS                         |           |           |           |           |
| SC2270  | SAT Plan Submission & Approval for Manual Fallback System                            | 84                | 01-Aug-25   | 10-Nov-25    | 12-Nov-24  | 22-Feb-25   |              |               | DS3860: SS                         |           |           |           |           |
| Cost Center L - Speed Enforcement System                    |  | 413               | 01-Aug-25   | 12-Jan-26    | 19-Feb-24  | 21-May-25   | 28-Aug-24    |               |                                    |           |           |           |           |
| SC2370  | SCT Plan Submission & Approval for Speed Enforcement System                          | 98                | 01-Aug-25   | 09-Sep-25    | 28-Aug-24  | 22-Mar-25   | 28-Aug-24    |               | DS3380: SS                         |           |           |           |           |
| SC2380  | Reliability Test Plan Submission & Approval for Speed Enforcement System             | 84                | 01-Aug-25   | 09-Sep-25    | 21-Dec-24  | 11-Apr-25   | 21-Dec-24    |               | DS3940: SS                         |           |           |           |           |
| SC2340  | Installation Drawing Preparation, Submission & Approval for Speed Enforcement System | 60                | 01-Aug-25   | 11-Oct-25    | 19-Feb-24  | 10-Mar-25   |              |               | DS6290: SS                         |           |           |           |           |
| SC2390  | Site Installation of Speed Enforcement System  | 71                | 01-Aug-25   | 24-Oct-25    | 10-Dec-24  | 22-Mar-25   |              |               | SW2330: SS                         |           |           |           |           |
| SC2400  | SCT of Speed Enforcement System  | 102               | 10-Sep-25   | 12-Jan-26    | 24-Mar-25  | 21-May-25   |              |               | DS8860: FS                         |           |           |           |           |
| Cost Center M - Power Distribution System                   |  | 98                | 01-Aug-25   | 01-Dec-25    | 01-Apr-24  | 21-Mar-25   | 01-Apr-24    |               |                                    |           |           |           |           |
| SC2480  | Site Installation of Power Distribution System                                       | 98                | 01-Aug-25   | 01-Dec-25    | 01-Apr-24  | 21-Mar-25   | 01-Apr-24    |               | SW1920: SS, SW2250: SS, SW1650: SS |           |           |           |           |
| Operation Facilities  |  | 257               | 01-Aug-25   | 10-Nov-25    | 19-Aug-24  | 11-Apr-25   | 31-Dec-24    |               |                                    |           |           |           |           |
| SC2680  | Site Installation of Operation Facilities  | 0                 | 01-Aug-25   | 20-Oct-25    | 07-Nov-24  | 07-Nov-24   | 31-Dec-24    |               | EM1120: FS                         |           |           |           |           |
| SC2630  | Installation Drawing Preparation, Submission & Approval for Operation Facilities     | 53                | 01-Aug-25   | 02-Oct-25    | 19-Aug-24  | 22-Oct-24   |              |               | DS6250: SS                         |           |           |           |           |
| SC2710  | SAT Plan Submission & Approval for Operation Facilities                              | 84                | 01-Aug-25   | 10-Nov-25    | 30-Dec-24  | 11-Apr-25   |              |               | DS3900: SS                         |           |           |           |           |
| Design & Submissions  |  | 304               | 01-Aug-25   | 01-Aug-25    | 27-Aug-24  | 25-Jun-25   | 29-Aug-23    |               |                                    |           |           |           |           |
| FSP Submissions (42 Working Days after Commencement of FSP) |  | 304               | 01-Aug-25   | 01-Aug-25    | 27-Aug-24  | 25-Jun-25   | 29-Aug-23    |               |                                    |           |           |           |           |
| FSP Batch 1 Submission                                      |  | 304               | 01-Aug-25   | 01-Aug-25    | 27-Aug-24  | 25-Jun-25   | 29-Aug-23    |               |                                    |           |           |           |           |
| Central System  |  | 304               | 01-Aug-25   | 01-Aug-25    | 27-Aug-24  | 25-Jun-25   | 29-Aug-23    |               |                                    |           |           |           |           |



| Activity ID   |                                  | Activity Name   | Original Duration | Early Start | Early Finish | Late Start | Late Finish | Actual Start | Actual Finish | Predecessor Details    | 2025      |           |           |           |
|---|----------------------------------|---|-------------------|-------------|--------------|------------|-------------|--------------|---------------|------------------------|-----------|-----------|-----------|-----------|
|   |                                  |   |                   |             |              |            |             |              |               |                        | Jul<br>43 | Aug<br>44 | Sep<br>45 | Oct<br>46 |
|   | Traffic Plan Review & Combine    |   | 140               | 01-Aug-25   | 01-Aug-25    | 27-Aug-24  | 27-Aug-24   | 28-Dec-23    |               |                        |           |           |           |           |
|   | DS7300                           | Traffic Plan Review & Combine Workshop                                  | 140               | 01-Aug-25   | 01-Aug-25    | 27-Aug-24  | 27-Aug-24   | 28-Dec-23    |               | DS1830: FS 22          |           |           |           |           |
|   | IT Security Risk Assessment Plan |   | 30                | 01-Aug-25   | 01-Aug-25    | 25-Jun-25  | 25-Jun-25   | 29-Aug-23    |               |                        |           |           |           |           |
|   | DS7440                           | Approval on IT Security Risk Assessment Plan                            | 30                | 01-Aug-25   | 01-Aug-25    | 25-Jun-25  | 25-Jun-25   | 29-Aug-23    |               | DS7430: FS             |           |           |           |           |
| Interface Coordination & Integration with Other Parties |                                  |   | 72                | 01-Aug-25   | 25-Oct-25    | 06-Apr-24  | 03-Jul-24   |              |               |                        |           |           |           |           |
| Interfacing Coordination with T2                        |                                  |   | 72                | 01-Aug-25   | 25-Oct-25    | 06-Apr-24  | 03-Jul-24   |              |               |                        |           |           |           |           |
| Preliminary Interfacing Management Plan (PIMP)          |                                  |   | 72                | 01-Aug-25   | 25-Oct-25    | 06-Apr-24  | 03-Jul-24   |              |               |                        |           |           |           |           |
|   | DS6890                           | Prepare & Submit PIMP with T2   | 24                | 01-Aug-25   | 28-Aug-25    | 06-Apr-24  | 04-May-24   |              |               | DS2680: FS 211         |           |           |           |           |
|   | DS6900                           | Comment on PIMP with T2   | 24                | 29-Aug-25   | 25-Sep-25    | 06-May-24  | 03-Jun-24   |              |               | DS6890: FS             |           |           |           |           |
|   | DS6910                           | Resubmit PIMP with T2   | 12                | 26-Sep-25   | 11-Oct-25    | 04-Jun-24  | 18-Jun-24   |              |               | DS6900: FS             |           |           |           |           |
|   | DS6920                           | Approval of PIMP with T2  | 12                | 13-Oct-25   | 25-Oct-25    | 19-Jun-24  | 03-Jul-24   |              |               | DS6910: FS             |           |           |           |           |
| Drawing & Installation Method Statement Submissions     |                                  |   | 537               | 01-Aug-25   | 11-Oct-25    | 19-Feb-24  | 31-Oct-26   | 10-Aug-23    |               |                        |           |           |           |           |
| Installation Drawing Submission                         |                                  |   | 60                | 01-Aug-25   | 11-Oct-25    | 19-Feb-24  | 10-Mar-25   |              |               |                        |           |           |           |           |
| Radio System  |                                  |   | 60                | 01-Aug-25   | 11-Oct-25    | 22-Apr-24  | 06-Feb-25   |              |               |                        |           |           |           |           |
|   | DS6130                           | Prepare & Submit Installation Drawing for Radio System                  | 12                | 01-Aug-25   | 14-Aug-25    | 22-Apr-24  | 06-May-24   |              |               | DS2154: FS             |           |           |           |           |
|   | DS6140                           | Comment on Installation Drawing for Radio System                        | 24                | 15-Aug-25   | 11-Sep-25    | 07-Dec-24  | 06-Jan-25   |              |               | DS6130: FS             |           |           |           |           |
|   | DS6150                           | Resubmit Installation Drawing for Radio System                          | 12                | 12-Sep-25   | 25-Sep-25    | 07-Jan-25  | 20-Jan-25   |              |               | DS6140: FS             |           |           |           |           |
|   | DS6160                           | Approval of Installation Drawing for Radio System                       | 12                | 26-Sep-25   | 11-Oct-25    | 21-Jan-25  | 06-Feb-25   |              |               | DS6150: FS, SC1930: FF |           |           |           |           |
| Operation Facility                                      |                                  |   | 53                | 01-Aug-25   | 02-Oct-25    | 19-Aug-24  | 22-Oct-24   |              |               |                        |           |           |           |           |
|   | DS6250                           | Prepare & Submit Installation Drawing for Operation Facility            | 5                 | 01-Aug-25   | 06-Aug-25    | 19-Aug-24  | 23-Aug-24   |              |               | DS2532: FS             |           |           |           |           |
|   | DS6260                           | Comment on Installation Drawing for Operation Facility                  | 24                | 07-Aug-25   | 03-Sep-25    | 24-Aug-24  | 21-Sep-24   |              |               | DS6250: FS             |           |           |           |           |
|   | DS6270                           | Resubmit Installation Drawing for Operation Facility                    | 12                | 04-Sep-25   | 17-Sep-25    | 23-Sep-24  | 07-Oct-24   |              |               | DS6260: FS             |           |           |           |           |
|   | DS6280                           | Approval of Installation Drawing for Operation Facility                 | 12                | 18-Sep-25   | 02-Oct-25    | 08-Oct-24  | 22-Oct-24   |              |               | DS6270: FS, SC2630: FF |           |           |           |           |
| Speed Enforcement System                                |                                  |   | 60                | 01-Aug-25   | 11-Oct-25    | 19-Feb-24  | 10-Mar-25   |              |               |                        |           |           |           |           |
|   | DS6290                           | Prepare & Submit Installation Drawing for Speed Enforcement System      | 12                | 01-Aug-25   | 14-Aug-25    | 19-Feb-24  | 02-Mar-24   |              |               | DS2472: FS             |           |           |           |           |
|   | DS6300                           | Comment on Installation Drawing for Speed Enforcement System            | 24                | 15-Aug-25   | 11-Sep-25    | 10-Jan-25  | 10-Feb-25   |              |               | DS6290: FS             |           |           |           |           |
|   | DS6310                           | Resubmit Installation Drawing for Speed Enforcement System              | 12                | 12-Sep-25   | 25-Sep-25    | 11-Feb-25  | 24-Feb-25   |              |               | DS6300: FS             |           |           |           |           |
|   | DS6320                           | Approval of Installation Drawing for Speed Enforcement System           | 12                | 26-Sep-25   | 11-Oct-25    | 25-Feb-25  | 10-Mar-25   |              |               | DS6310: FS, SC2340: FF |           |           |           |           |
| Installation Method Statement Submission                |                                  |   | 499               | 01-Aug-25   | 26-Aug-25    | 06-Oct-26  | 31-Oct-26   | 10-Aug-23    |               |                        |           |           |           |           |
| Power Distribution System                               |                                  |   | 499               | 01-Aug-25   | 26-Aug-25    | 06-Oct-26  | 31-Oct-26   | 10-Aug-23    |               |                        |           |           |           |           |
|   | DS6550                           | Resubmit Installation Method Statement for Power Distribution System    | 6                 | 01-Aug-25   | 12-Aug-25    | 06-Oct-26  | 16-Oct-26   | 10-Aug-23    |               | DS6540: FS             |           |           |           |           |
|   | DS6560                           | Approval of Installation Method Statement for Power Distribution System | 12                | 13-Aug-25   | 26-Aug-25    | 17-Oct-26  | 31-Oct-26   |              |               | DS6550: FS             |           |           |           |           |
| SCT Plan Submissions                                    |                                  |   | 386               | 01-Aug-25   | 09-Sep-25    | 07-Dec-24  | 22-Mar-25   | 24-Dec-24    |               |                        |           |           |           |           |
| Traffic Control Devices                                 |                                  |   | 361               | 01-Aug-25   | 09-Sep-25    | 11-Jan-25  | 22-Feb-25   | 11-Feb-25    |               |                        |           |           |           |           |
|   | DS8910                           | Resubmission of SCT Plan for Traffic Control Devices                    | 12                | 01-Aug-25   | 12-Aug-25    | 11-Jan-25  | 22-Jan-25   | 11-Feb-25    |               | DS3010: FS             |           |           |           |           |
|   | DS8920                           | Approval of SCT Plan for Traffic Control Devices                        | 24                | 13-Aug-25   | 09-Sep-25    | 23-Jan-25  | 22-Feb-25   |              |               | DS8910: FS, SC1200: FF |           |           |           |           |
| Radio System  |                                  |   | 24                |             |              |            |             | 12-Jun-25    | 30-Jun-25     |                        |           |           |           |           |
|   | DS9080                           | Approval of SCT Plan for Radio System                                   | 24                |             |              |            |             | 12-Jun-25    | 30-Jun-25     | SC1980: FF, DS9070: FS |           |           |           |           |
| Detection System  |                                  |   | 38                | 01-Aug-25   | 09-Sep-25    | 07-Dec-24  | 17-Jan-25   | 24-Jun-25    |               |                        |           |           |           |           |
|   | DS9150                           | Resubmission of SCT Plan for Detection System                           | 12                | 01-Aug-25   | 12-Aug-25    | 07-Dec-24  | 18-Dec-24   | 24-Jun-25    |               | DS9100: FS             |           |           |           |           |
|   | DS9160                           | Approval of SCT Plan for Detection System                               | 24                | 13-Aug-25   | 09-Sep-25    | 19-Dec-24  | 17-Jan-25   |              |               | SC2110: FF, DS9150: FS |           |           |           |           |
| Speed Enforcement System                                |                                  |   | 386               | 01-Aug-25   | 09-Sep-25    | 12-Feb-25  | 22-Mar-25   | 24-Dec-24    |               |                        |           |           |           |           |
|   | DS8850                           | Resubmission of SCT Plan for Speed Enforcement System                   | 12                | 01-Aug-25   | 12-Aug-25    | 12-Feb-25  | 22-Feb-25   | 24-Dec-24    |               | DS3410: FS             |           |           |           |           |
|   | DS8860                           | Approval of SCT Plan for Speed Enforcement System                       | 24                | 13-Aug-25   | 09-Sep-25    | 24-Feb-25  | 22-Mar-25   |              |               | DS8850: FS, SC2370: FF |           |           |           |           |
| SAT Plan Submissions                                    |                                  |   | 428               | 01-Aug-25   | 10-Nov-25    | 09-Nov-24  | 07-May-25   | 14-Jan-25    |               |                        |           |           |           |           |
| Central System  |                                  |   | 78                | 01-Aug-25   | 03-Nov-25    | 07-Jan-25  | 11-Apr-25   |              |               |                        |           |           |           |           |
|   | DS3500                           | Submission of Central System SAT Plan                                   | 18                | 01-Aug-25   | 21-Aug-25    | 07-Jan-25  | 27-Jan-25   |              |               | DS2940: FS             |           |           |           |           |
|   | DS3510                           | Comment on SAT Plan/ Workshops (System Briefing & Comment Discussion)   | 24                | 22-Aug-25   | 18-Sep-25    | 28-Jan-25  | 27-Feb-25   |              |               | DS3500: FS             |           |           |           |           |
|   | DS3520                           | Resubmission of SAT Plan for Central System                             | 12                | 19-Sep-25   | 03-Oct-25    | 28-Feb-25  | 13-Mar-25   |              |               | DS3510: FS             |           |           |           |           |





| Activity ID  | Activity Name   | Original Duration | Early Start | Early Finish | Late Start | Late Finish | Actual Start | Actual Finish | Predecessor Details    | 2025      |           |           |           |
|--|---|-------------------|-------------|--------------|------------|-------------|--------------|---------------|------------------------|-----------|-----------|-----------|-----------|
|  |   |                   |             |              |            |             |              |               |                        | Jul<br>43 | Aug<br>44 | Sep<br>45 | Oct<br>46 |
| DS3530   | Approval of SAT Plan for Central System                               | 24                | 04-Oct-25   | 03-Nov-25    | 14-Mar-25  | 11-Apr-25   |              |               | SC1090: FF, DS3520: FS |           |           |           |           |
| Traffic Control Devices                                      |   | 84                | 01-Aug-25   | 10-Nov-25    | 30-Dec-24  | 11-Apr-25   |              |               |                        |           |           |           |           |
| DS3540   | Submission of Traffic Control Devices System SAT Plan                 | 24                | 01-Aug-25   | 28-Aug-25    | 30-Dec-24  | 27-Jan-25   |              |               | DS2980: FS             |           |           |           |           |
| DS3550   | Comment on SAT Plan/ Workshops (System Briefing & Comment Discussion) | 24                | 29-Aug-25   | 25-Sep-25    | 28-Jan-25  | 27-Feb-25   |              |               | DS3540: FS             |           |           |           |           |
| DS3560   | Resubmission of SAT Plan for Traffic Control Devices                  | 12                | 26-Sep-25   | 11-Oct-25    | 28-Feb-25  | 13-Mar-25   |              |               | DS3550: FS             |           |           |           |           |
| DS3570   | Approval of SAT Plan for Traffic Control Devices                      | 24                | 13-Oct-25   | 10-Nov-25    | 14-Mar-25  | 11-Apr-25   |              |               | SC1220: FF, DS3560: FS |           |           |           |           |
| Communication System   |   | 378               | 01-Aug-25   | 09-Sep-25    | 21-Nov-24  | 31-Dec-24   | 30-Apr-25    |               |                        |           |           |           |           |
| DS9110   | Resubmission of SAT Plan for Communication System                     | 12                | 01-Aug-25   | 12-Aug-25    | 21-Nov-24  | 02-Dec-24   | 30-Apr-25    |               | DS3610: FS             |           |           |           |           |
| DS9120   | Approval of SAT Plan for Communication System                         | 24                | 13-Aug-25   | 09-Sep-25    | 03-Dec-24  | 31-Dec-24   |              |               | SC1350: FF, DS9110: FS |           |           |           |           |
| CCTV System  |   | 364               | 01-Aug-25   | 11-Sep-25    | 15-Feb-25  | 28-Mar-25   | 14-Jan-25    |               |                        |           |           |           |           |
| DS3640   | Resubmission of SAT Plan for CCTV System                              | 12                | 01-Aug-25   | 14-Aug-25    | 15-Feb-25  | 28-Feb-25   | 14-Jan-25    |               | DS3630: FS             |           |           |           |           |
| DS3650   | Approval of SAT Plan for CCTV System                                  | 24                | 15-Aug-25   | 11-Sep-25    | 01-Mar-25  | 28-Mar-25   |              |               | SC1480: FF, DS3640: FS |           |           |           |           |
| PABX System  |   | 24                |             |              |            |             | 20-Jun-25    | 04-Jul-25     |                        |           |           |           |           |
| DS9060   | Approval of SAT Plan for PABX System                                  | 24                |             |              |            |             | 20-Jun-25    | 04-Jul-25     | SC1610: FF, DS9050: FS |           |           |           |           |
| ET System  |   | 136               | 01-Aug-25   | 09-Sep-25    | 12-Mar-25  | 21-Apr-25   | 19-Feb-25    |               |                        |           |           |           |           |
| DS3720   | Resubmission of SAT Plan for ET System                                | 12                | 01-Aug-25   | 12-Aug-25    | 12-Mar-25  | 22-Mar-25   | 19-Feb-25    |               | DS3710: FS             |           |           |           |           |
| DS3730   | Approval of SAT Plan for ET System                                    | 24                | 13-Aug-25   | 09-Sep-25    | 24-Mar-25  | 21-Apr-25   |              |               | SC1740: FF, DS3720: FS |           |           |           |           |
| PA System  |   | 338               | 01-Aug-25   | 09-Sep-25    | 26-Mar-25  | 07-May-25   | 11-Apr-25    |               |                        |           |           |           |           |
| DS9130   | Resubmission of SAT Plan for PA System                                | 12                | 01-Aug-25   | 12-Aug-25    | 26-Mar-25  | 07-Apr-25   | 11-Apr-25    |               | DS3770: FS             |           |           |           |           |
| DS9140   | Approval of SAT Plan for PA System                                    | 24                | 13-Aug-25   | 09-Sep-25    | 08-Apr-25  | 07-May-25   |              |               | SC1870: FF, DS9130: FS |           |           |           |           |
| Radio System   |   | 60                | 01-Aug-25   | 11-Oct-25    | 09-Nov-24  | 21-Apr-25   | 04-Jul-25    |               |                        |           |           |           |           |
| DS3780   | Submission of Radio System SAT Plan                                   | 24                |             |              |            |             | 04-Jul-25    | 31-Jul-25     | DS3220: FS 48          |           |           |           |           |
| DS3790   | Comment on SAT Plan/ Workshops (System Briefing & Comment Discussion) | 24                | 01-Aug-25   | 28-Aug-25    | 09-Nov-24  | 06-Dec-24   |              |               | DS3780: FS             |           |           |           |           |
| DS3800   | Resubmission of SAT Plan for Radio System                             | 12                | 29-Aug-25   | 11-Sep-25    | 10-Mar-25  | 22-Mar-25   |              |               | DS3790: FS             |           |           |           |           |
| DS3810   | Approval of SAT Plan for Radio System                                 | 24                | 12-Sep-25   | 11-Oct-25    | 24-Mar-25  | 21-Apr-25   |              |               | SC2000: FF, DS3800: FS |           |           |           |           |
| Detection System   |   | 84                | 01-Aug-25   | 10-Nov-25    | 04-Jan-25  | 16-Apr-25   |              |               |                        |           |           |           |           |
| DS3820   | Submission of Detection System SAT Plan                               | 24                | 01-Aug-25   | 28-Aug-25    | 04-Jan-25  | 04-Feb-25   |              |               | DS3260: FS 72          |           |           |           |           |
| DS3830   | Comment on SAT Plan/ Workshops (System Briefing & Comment Discussion) | 24                | 29-Aug-25   | 25-Sep-25    | 05-Feb-25  | 04-Mar-25   |              |               | DS3820: FS             |           |           |           |           |
| DS3840   | Resubmission of SAT Plan for Detection System                         | 12                | 26-Sep-25   | 11-Oct-25    | 05-Mar-25  | 18-Mar-25   |              |               | DS3830: FS             |           |           |           |           |
| DS3850   | Approval of SAT Plan for Detection System                             | 24                | 13-Oct-25   | 10-Nov-25    | 19-Mar-25  | 16-Apr-25   |              |               | SC2130: FF, DS3840: FS |           |           |           |           |
| Manual Fallback Control System                               |   | 84                | 01-Aug-25   | 10-Nov-25    | 12-Nov-24  | 22-Feb-25   |              |               |                        |           |           |           |           |
| DS3860   | Submission of Manual Fallback Control System SAT Plan                 | 24                | 01-Aug-25   | 28-Aug-25    | 12-Nov-24  | 09-Dec-24   |              |               | DS3300: FS             |           |           |           |           |
| DS3870   | Comment on SAT Plan/ Workshops (System Briefing & Comment Discussion) | 24                | 29-Aug-25   | 25-Sep-25    | 10-Dec-24  | 08-Jan-25   |              |               | DS3860: FS             |           |           |           |           |
| DS3880   | Resubmission of SAT Plan for Manual Fallback Control System           | 12                | 26-Sep-25   | 11-Oct-25    | 09-Jan-25  | 22-Jan-25   |              |               | DS3870: FS             |           |           |           |           |
| DS3890   | Approval of SAT Plan for Manual Fallback Control System               | 24                | 13-Oct-25   | 10-Nov-25    | 23-Jan-25  | 22-Feb-25   |              |               | SC2270: FF, DS3880: FS |           |           |           |           |
| Operation Facility   |   | 84                | 01-Aug-25   | 10-Nov-25    | 30-Dec-24  | 11-Apr-25   |              |               |                        |           |           |           |           |
| DS3900   | Submission of Operation Facility SAT Plan                             | 24                | 01-Aug-25   | 28-Aug-25    | 30-Dec-24  | 27-Jan-25   |              |               | DS3340: FS             |           |           |           |           |
| DS3910   | Comment on SAT Plan/ Workshops (System Briefing & Comment Discussion) | 24                | 29-Aug-25   | 25-Sep-25    | 28-Jan-25  | 27-Feb-25   |              |               | DS3900: FS             |           |           |           |           |
| DS3920   | Resubmission of SAT Plan for Operation Facility                       | 12                | 26-Sep-25   | 11-Oct-25    | 28-Feb-25  | 13-Mar-25   |              |               | DS3910: FS             |           |           |           |           |
| DS3930   | Approval of SAT Plan for Operation Facility                           | 24                | 13-Oct-25   | 10-Nov-25    | 14-Mar-25  | 11-Apr-25   |              |               | SC2710: FF, DS3920: FS |           |           |           |           |
| Speed Enforcement System                                     |   | 61                | 01-Aug-25   | 09-Sep-25    | 03-Mar-25  | 11-Apr-25   | 22-Feb-25    |               |                        |           |           |           |           |
| DS3960   | Resubmission of Reliability Test Plan for Speed Enforcement System    | 12                | 01-Aug-25   | 12-Aug-25    | 03-Mar-25  | 13-Mar-25   | 22-Feb-25    |               | DS3950: FS             |           |           |           |           |
| DS3970   | Approval of Reliability Test Plan for Speed Enforcement System        | 24                | 13-Aug-25   | 09-Sep-25    | 14-Mar-25  | 11-Apr-25   |              |               | SC2380: FF, DS3960: FS |           |           |           |           |
| Training Document & O&M Manual Submission for T2/TKOLTT TCSS |   | 65                | 01-Aug-25   | 17-Oct-25    | 06-Jun-26  | 22-Aug-26   |              |               |                        |           |           |           |           |
| DS3980   | Submit Document for System Description                                | 6                 | 01-Aug-25   | 07-Aug-25    | 06-Jun-26  | 12-Jun-26   |              |               | DS3580: SS 30          |           |           |           |           |
| DS4010   | Submit System Administration Manual                                   | 11                | 08-Aug-25   | 20-Aug-25    | 13-Jun-26  | 26-Jun-26   |              |               | DS3980: FS             |           |           |           |           |
| DS4020   | Submit Training Manual  | 48                | 21-Aug-25   | 17-Oct-25    | 27-Jun-26  | 22-Aug-26   |              |               | DS4010: FS             |           |           |           |           |
| Site Installation and Testing & Commissioning                |   | 510               | 01-Aug-25   | 10-Jan-26    | 02-Apr-24  | 31-Oct-26   | 01-Apr-24    |               |                        |           |           |           |           |





| Activity ID  | Activity Name   | Original Duration | Early Start | Early Finish | Late Start | Late Finish | Actual Start | Actual Finish | Predecessor Details   | 2025      |           |           |           |
|--|---|-------------------|-------------|--------------|------------|-------------|--------------|---------------|---|-----------|-----------|-----------|-----------|
|  |   |                   |             |              |            |             |              |               |   | Jul<br>43 | Aug<br>44 | Sep<br>45 | Oct<br>46 |
| Portion 4 - TKO-LTT (LT Interchange)                   |   | 149               | 01-Aug-25   | 10-Jan-26    | 02-Apr-24  | 03-Feb-25   | 30-Jun-25    |               |   |           |           |           |           |
| SW1020   | Inspect Civil Provisions & Submit Inspection Report         | 12                | 01-Aug-25   | 14-Aug-25    | 02-Apr-24  | 16-Apr-24   |              |               | DS6600: FS, DS6680: FS, DS6760: FS, DS6840: FS, AC1030: SS                |           |           |           |           |
| SW1030   | Rectify Civil Provision Defects by Others                   | 18                | 15-Aug-25   | 04-Sep-25    | 17-Apr-24  | 08-May-24   |              |               | SW1020: FS  |           |           |           |           |
| Installation Works                                     |   | 149               | 01-Aug-25   | 10-Jan-26    | 26-Apr-24  | 03-Feb-25   | 30-Jun-25    |               |   |           |           |           |           |
| SW1080   | Laying of Signal Cable - the 1st Section                    | 38                | 01-Aug-25   | 11-Nov-25    | 13-May-24  | 22-Aug-24   | 30-Jun-25    |               | DS8480: FS, DS8580: FS  |           |           |           |           |
| SW1040   | Install Cable Containments                                  | 98                | 25-Aug-25   | 19-Dec-25    | 26-Apr-24  | 22-Aug-24   |              |               | DS6400: FS, DS6540: FS, SW1030: SS 8                                      |           |           |           |           |
| SW1060   | Install CCTV Camera   | 115               | 25-Aug-25   | 10-Jan-26    | 13-Sep-24  | 03-Feb-25   |              |               | DS4090: FS, DS6440: FS, SW1040: SS, SW1930: SS                            |           |           |           |           |
| SW1070   | Install Detection Camera                                    | 115               | 25-Aug-25   | 10-Jan-26    | 31-Aug-24  | 17-Jan-25   |              |               | DS4490: FS, DS6440: FS, DS7500: FS, SW1040: SS, SW1930: SS                |           |           |           |           |
| SW1110   | Install Traffic Control Devices                             | 115               | 25-Aug-25   | 10-Jan-26    | 11-Jul-24  | 25-Nov-24   |              |               | DS2810: FS, EM1650: FS, DS8250: FS, SW1040: SS, SW1930: SS                |           |           |           |           |
| SW1130   | Install VSLS on Gantry                                      | 14                | 10-Sep-25   | 25-Sep-25    | 02-Sep-24  | 17-Sep-24   |              |               | SC1210: FF, DS2810: FS, EM1650: FS, DS8250: FS, SW1040: SS 14             |           |           |           |           |
| SW1140   | Install PVMS on Gantry                                      | 14                | 10-Sep-25   | 25-Sep-25    | 04-Jul-24  | 19-Jul-24   |              |               | SC1210: FF, EM1030: FS, DS2810: FS, EM1650: FS, DS8250: FS, SW1040: SS 14 |           |           |           |           |
| SW1050   | Install Equipment Racks                                     | 24                | 25-Sep-25   | 24-Oct-25    | 19-Jul-24  | 15-Aug-24   |              |               | SW1140: SS 13, SW1030: FS   |           |           |           |           |
| SW1170   | Install Manual Barriers                                     | 24                | 02-Oct-25   | 31-Oct-25    | 29-Oct-24  | 25-Nov-24   |              |               | SW1130: FS, SW1140: SS 18   |           |           |           |           |
| SW1100   | Install Server Equipment                                    | 36                | 25-Oct-25   | 06-Dec-25    | 16-Aug-24  | 27-Sep-24   |              |               | DS4440: FS, DS4340: FS, SW1050: FS  |           |           |           |           |
| SW1120   | Install Equipment in Kiosk C                                | 12                | 25-Oct-25   | 08-Nov-25    | 13-Sep-24  | 27-Sep-24   |              |               | DS4340: FS, DS4440: FS, SW1050: FS  |           |           |           |           |
| Portion 1 - South Apron Up to SUS                      |   | 96                | 01-Aug-25   | 24-Nov-25    | 31-May-24  | 25-Nov-24   |              |               |   |           |           |           |           |
| SW1210   | Inspect Civil Provisions & Submit Inspection Report         | 12                | 01-Aug-25   | 14-Aug-25    | 31-May-24  | 14-Jun-24   |              |               | AC1000: SS  |           |           |           |           |
| SW1220   | Rectify Civil Provision Defects by Others                   | 18                | 15-Aug-25   | 04-Sep-25    | 15-Jun-24  | 06-Jul-24   |              |               | SW1210: FS  |           |           |           |           |
| Installation Works                                     |   | 96                | 01-Aug-25   | 24-Nov-25    | 18-Jul-24  | 25-Nov-24   |              |               |   |           |           |           |           |
| SW1350   | Signal Cable Laying - the 2nd Section                       | 54                | 01-Aug-25   | 03-Oct-25    | 21-Sep-24  | 25-Nov-24   |              |               | SW1260: FS 33   |           |           |           |           |
| SW1230   | Install Cable Containments - the 1st Section                | 48                | 05-Sep-25   | 03-Nov-25    | 18-Jul-24  | 11-Sep-24   |              |               | SC2480: FF, DS6404: FS, DS6540: FS, SW1220: FS                            |           |           |           |           |
| SW1250   | Install Detection Cameras                                   | 24                | 19-Sep-25   | 18-Oct-25    | 07-Oct-24  | 04-Nov-24   |              |               | DS4490: FS, DS6440: FS, DS7500: FS, SW1230: SS 12, SW2000: SS 12          |           |           |           |           |
| SW1240   | Install CCTV Camera   | 24                | 27-Oct-25   | 24-Nov-25    | 07-Oct-24  | 04-Nov-24   |              |               | SC1470: FF, DS4090: FS, DS6440: FS, SW1230: SS 42                         |           |           |           |           |
| Portion 2 - Tunnel Section, Service Gallery, WVB & EVB |   | 489               | 01-Aug-25   | 15-Dec-25    | 10-Aug-24  | 31-Oct-26   | 01-Apr-24    |               |   |           |           |           |           |
| Tunnel Section   |   | 258               | 01-Aug-25   | 15-Dec-25    | 17-Aug-24  | 21-May-25   | 25-Feb-25    |               |   |           |           |           |           |
| Tunnel Section - LSCC to CP7                           |   | 71                | 01-Aug-25   | 30-Oct-25    | 20-Sep-24  | 07-Apr-25   | 24-Mar-25    |               |   |           |           |           |           |
| SW3080   | Inspect Civil Provisions & Submit Inspection Report         | 3                 | 01-Aug-25   | 04-Aug-25    | 20-Sep-24  | 23-Sep-24   |              |               | AC1010a: SS   |           |           |           |           |
| SW3090   | Rectify Civil Provision Defects by Others                   | 6                 | 05-Aug-25   | 11-Aug-25    | 24-Sep-24  | 30-Sep-24   |              |               | SW3080: FS  |           |           |           |           |
| East Bound   |   | 71                | 01-Aug-25   | 30-Oct-25    | 02-Oct-24  | 07-Apr-25   | 24-Mar-25    |               |   |           |           |           |           |
| SW2461   | Signal Cable Laying and Termination (WVB to CP7) (CP Side)  | 12                | 01-Aug-25   | 15-Sep-25    | 10-Oct-24  | 25-Nov-24   | 24-Mar-25    |               | SW1260: SS  |           |           |           |           |
| SW2463   | Install GOFS (WVB to CP7)                                   | 12                | 01-Aug-25   | 15-Sep-25    | 10-Oct-24  | 25-Nov-24   | 24-Mar-25    |               | SW2461: SS  |           |           |           |           |
| SW2990   | Install CCTV Camera   | 19                | 01-Aug-25   | 30-Oct-25    | 26-Nov-24  | 26-Feb-25   | 15-May-25    |               | AC1010g: SS   |           |           |           |           |
| SW3000   | Install Detection Camera                                    | 18                | 01-Aug-25   | 30-Oct-25    | 21-Oct-24  | 17-Jan-25   | 15-May-25    |               | AC1010g: SS   |           |           |           |           |
| SW3030   | Install Traffic Control Devices                             | 9                 | 01-Aug-25   | 30-Oct-25    | 22-Nov-24  | 22-Feb-25   | 15-May-25    |               | AC1010g: SS   |           |           |           |           |
| SW2462   | Signal Cable Laying and Termination (WVB to CP7) (NCP Side) | 12                | 01-Aug-25   | 15-Sep-25    | 10-Oct-24  | 25-Nov-24   | 27-May-25    |               | SW2461: SS  |           |           |           |           |
| SW2980a  | Install Cable Containment (NCP Side)                        | 9                 | 01-Aug-25   | 11-Aug-25    | 02-Oct-24  | 12-Oct-24   |              |               | AC1010h: SS, AC1010h: SF  |           |           |           |           |
| SW3020a  | Install ET (Service Gallery)                                | 5                 | 01-Aug-25   | 06-Aug-25    | 18-Feb-25  | 22-Feb-25   |              |               | AC1010i: SS   |           |           |           |           |
| SW3050   | Install PA in Service Gallery                               | 19                | 01-Aug-25   | 22-Aug-25    | 15-Mar-25  | 07-Apr-25   |              |               | AC1010i: SS   |           |           |           |           |
| SW3060   | Install PABX in Service Gallery                             | 19                | 01-Aug-25   | 22-Aug-25    | 15-Mar-25  | 07-Apr-25   |              |               | SW3050: SS, AC1010i: SS   |           |           |           |           |

Date

31-Jul-25

Revision

Rev. 0

Checked

MY

Approved

Page 5 of 14

| Activity ID |                              | Activity Name  | Original Duration   | Early Start | Early Finish | Late Start | Late Finish | Actual Start | Actual Finish | Predecessor Details  | 2025   |           |           |           |  |
|-------------|------------------------------|--|---|-------------|--------------|------------|-------------|--------------|---------------|--|--|-----------|-----------|-----------|--|
|             |                              |  |   |             |              |            |             |              |               |  | Jul<br>43  | Aug<br>44 | Sep<br>45 | Oct<br>46 |  |
| CP7 to CP21 | SW3070                       | Install Radio System in Service Gallery                  | 19  | 01-Aug-25   | 22-Aug-25    | 01-Feb-25  | 22-Feb-25   |              |               | AC1010i: SS  |  |           |           |           |  |
|             | SW2980                       | Install Cable Containment (CP Side)                      | 9   | 12-Aug-25   | 21-Aug-25    | 02-Oct-24  | 12-Oct-24   |              |               | SW3090: FS, AC1010f: SS  |  |           |           |           |  |
|             | SW3020                       | Install ET (Road Level)                                  | 5   | 12-Aug-25   | 16-Aug-25    | 18-Feb-25  | 22-Feb-25   |              |               | SW2980a: FS, AC1010d: SS   |  |           |           |           |  |
|             | SW3010                       | Install SEC Camera                                       | 7   | 22-Aug-25   | 29-Aug-25    | 15-Mar-25  | 22-Mar-25   |              |               | SW2980: FS   |  |           |           |           |  |
|             | SW3040                       | Install VLSL (CP Side)                                   | 10  | 22-Aug-25   | 02-Sep-25    | 28-Jan-25  | 11-Feb-25   |              |               | AC1010d: SS, SW2980: FS  |  |           |           |           |  |
|             | SW3040a                      | Install VLSL (NCP Side)                                  | 10  | 03-Sep-25   | 13-Sep-25    | 12-Feb-25  | 22-Feb-25   |              |               | AC1010d: SS, SW3040: FS, SW2980a: FS   |  |           |           |           |  |
|             | West Bound                   |  | 71  | 01-Aug-25   | 30-Oct-25    | 02-Oct-24  | 07-Apr-25   | 15-May-25    |               |  |  |           |           |           |  |
|             | SW3110                       | Install CCTV Camera                                      | 19  | 01-Aug-25   | 30-Oct-25    | 26-Nov-24  | 26-Feb-25   | 15-May-25    |               |  | AC1010c: SS  |           |           |           |  |
|             | SW3120                       | Install Detection Camera                                 | 18  | 01-Aug-25   | 30-Oct-25    | 21-Oct-24  | 17-Jan-25   | 15-May-25    |               |  | AC1010c: SS  |           |           |           |  |
|             | SW3150                       | Install Traffic Control Devices                          | 9   | 01-Aug-25   | 30-Oct-25    | 22-Nov-24  | 22-Feb-25   | 15-May-25    |               |  | AC1010c: SS  |           |           |           |  |
|             | SW3100a                      | Install Cable Containment (NCP Side)                     | 9   | 01-Aug-25   | 11-Aug-25    | 02-Oct-24  | 12-Oct-24   |              |               | AC1010b: SS  |  |           |           |           |  |
|             | SW3140                       | Install ET (Road Level)                                  | 5   | 01-Aug-25   | 06-Aug-25    | 18-Feb-25  | 22-Feb-25   |              |               | AC1010d: SS  |  |           |           |           |  |
|             | SW3140a                      | Install ET (Service Gallery)                             | 5   | 01-Aug-25   | 06-Aug-25    | 18-Feb-25  | 22-Feb-25   |              |               | AC1010e: SS  |  |           |           |           |  |
|             | SW3170                       | Install PA in Service Gallery                            | 19  | 01-Aug-25   | 22-Aug-25    | 15-Feb-25  | 08-Mar-25   |              |               | AC1010e: SS  |  |           |           |           |  |
|             | SW3180                       | Install PABX in Service Gallery                          | 19  | 01-Aug-25   | 22-Aug-25    | 15-Mar-25  | 07-Apr-25   |              |               | AC1010e: SS  |  |           |           |           |  |
|             | SW3190                       | Install Radio System in Service Gallery                  | 19  | 01-Aug-25   | 22-Aug-25    | 01-Feb-25  | 22-Feb-25   |              |               | AC1010e: SS  |  |           |           |           |  |
|             | SW3100                       | Install Cable Containment (CP Side)                      | 9   | 12-Aug-25   | 21-Aug-25    | 02-Oct-24  | 12-Oct-24   |              |               | AC1010a: SS, SW3090: FS  |  |           |           |           |  |
|             | SW3130                       | Install SEC Camera                                       | 7   | 22-Aug-25   | 29-Aug-25    | 15-Mar-25  | 22-Mar-25   |              |               | SW3100: FS   |  |           |           |           |  |
|             | SW3160                       | Install VLSL (CP Side)                                   | 10  | 22-Aug-25   | 02-Sep-25    | 28-Jan-25  | 11-Feb-25   |              |               | SW3100: FS, AC1010d: SS  |  |           |           |           |  |
|             | SW3160a                      | Install VLSL (NCP Side)                                  | 10  | 03-Sep-25   | 13-Sep-25    | 12-Feb-25  | 22-Feb-25   |              |               | SW3100a: FS, SW3160: FS, AC1010d: SS   |  |           |           |           |  |
|             | Tunnel Section - CP7 to CP11 |  |   | 140         | 01-Aug-25    | 15-Dec-25  | 17-Aug-24   | 21-May-25    | 02-Jun-25     |  |  |           |           |           |  |
|             | East Bound                   |  |   | 140         | 01-Aug-25    | 15-Dec-25  | 06-Sep-24   | 21-May-25    | 02-Jun-25     |  |  |           |           |           |  |
|             | CP Side                      |  |   | 89          | 01-Aug-25    | 15-Nov-25  | 25-Nov-24   | 21-May-25    | 23-Jun-25     |  |  |           |           |           |  |
|             |                              | SW2330a  | SEC Camera - SCT Cable Test & Final Circuit Wiring - CP7 to CP21              | 71          | 01-Aug-25    | 15-Oct-25  | 20-Jan-25   | 17-Apr-25    | 23-Jun-25     |  | SW2330: SS   |           |           |           |  |
|             |                              | SW2340b  | ET - SCT Cable Test & Final Circuit Wiring - CP7 to CP21                      | 71          | 01-Aug-25    | 15-Oct-25  | 26-Nov-24   | 22-Feb-25    | 23-Jun-25     |  | SW2340: SS, SW2330a: SS  |           |           |           |  |
|             |                              | SW2360a  | VLSL - SCT Cable Test & Final Circuit Wiring - CP7 to CP21                    | 71          | 01-Aug-25    | 15-Oct-25  | 26-Nov-24   | 22-Feb-25    | 23-Jun-25     |  | SW2330a: SS  |           |           |           |  |
|             |                              | SW4060a  | TCSS Cabinet - SCT Cable Test & Final Circuit Wiring - CP7 to CP21            | 71          | 01-Aug-25    | 15-Oct-25  | 25-Nov-24   | 21-Feb-25    | 23-Jun-25     |  | SW4060: SS, SW2330a: SS  |           |           |           |  |
|             |                              | SW2330   | Install SEC Camera - CP7 to CP11  | 17          | 01-Aug-25    | 20-Aug-25  | 10-Dec-24   | 30-Dec-24    |               |  | EM1130: FS, DS7410: FS, SW2300: FS, AC1050d: SS                            |           |           |           |  |
|             |                              | SW2360   | Install VLSL - CP7 to CP11  | 13          | 15-Aug-25    | 29-Aug-25  | 24-Dec-24   | 09-Jan-25    |               |  | SW2300: FS, DS2810: FS, EM1650: FS, DS8250: FS, AC1050g: SS, SW2330: SS 12 |           |           |           |  |
|             |                              | SW2330b  | SEC Camera - Physical Inspection and Function Test - CP7 to CP21              | 50          | 13-Sep-25    | 13-Nov-25  | 18-Mar-25   | 21-May-25    |               |  | SW2330a: FF 24   |           |           |           |  |
|             |                              | SW2340c  | ET - Physical Inspection and Function Test - CP7 to CP21                      | 25          | 16-Oct-25    | 14-Nov-25  | 19-Mar-25   | 17-Apr-25    |               |  | SW2340b: FS  |           |           |           |  |
|             |                              | SW2360b  | VLSL - Physical Inspection and Function Test - CP7 to CP21                    | 26          | 16-Oct-25    | 15-Nov-25  | 16-Apr-25   | 21-May-25    |               |  | SW2360a: FS  |           |           |           |  |
|             |                              | SW4060a  | TCSS Cabinet - Physical Inspection - CP7 to CP21                              | 25          | 16-Oct-25    | 14-Nov-25  | 22-Feb-25   | 22-Mar-25    |               |  | SW4060a: FS  |           |           |           |  |
|             | OHVD                         |  |   | 106         | 01-Aug-25    | 05-Nov-25  | 06-Sep-24   | 22-Feb-25    | 02-Jun-25     |  |  |           |           |           |  |
|             |                              | SW4080   | Install LCX Bracket - CP7 to CP11   | 25          |              |            |             |              | 02-Jun-25     | 30-Jun-25  | AC1050b: SS  |           |           |           |  |
|             |                              | SW2310a  | CCTV - SCT Cable Test & Final Circuit Wiring - CP7 to CP21                    | 80          | 01-Aug-25    | 05-Nov-25  | 04-Oct-24   | 08-Jan-25    |               |  | SW2310: FS, SW2340d: SS  |           |           |           |  |
|             |                              | SW2320a  | Detection Camera - SCT Cable Test & Final Circuit Wiring - CP7 to CP21        | 80          | 01-Aug-25    | 05-Nov-25  | 06-Sep-24   | 11-Dec-24    |               |  | SW2320: FS, SW2340d: SS  |           |           |           |  |
|             |                              | SW2350a  | Traffic Control Devices - SCT Cable Test & Final Circuit Wiring - CP7 to CP21 | 80          | 01-Aug-25    | 05-Nov-25  | 30-Sep-24   | 04-Jan-25    |               |  | SW2350: FS, SW2340d: SS  |           |           |           |  |
|             |                              | SW4090   | Install LCX Cable - CP7 to CP11   | 26          | 23-Sep-25    | 24-Oct-25  | 10-Jan-25   | 22-Feb-25    |               |  | SW4080: FS, SW4170: FS, SW4270: FS   |           |           |           |  |
|             | Service Gallery              |  |   | 114         | 01-Aug-25    | 15-Dec-25  | 06-Sep-24   | 24-Mar-25    | 10-Jul-25     |  |  |           |           |           |  |
|             | SW2340d                      | ET - SCT Cable Test & Final Circuit Wiring - CP7 to CP21 | 94  | 01-Aug-25   | 29-Nov-25    | 06-Sep-24  | 07-Jan-25   | 10-Jul-25    |               | SW2340a: FS, SW2480a: FS, SW2340b: SS 14                                     |  |           |           |           |  |
|             | SW2390                       | Install LCX Bracket - CP7 to CP21                        | 61  | 18-Aug-25   | 30-Oct-25    | 12-Nov-24  | 23-Jan-25   |              |               | SW2310: SS, DS4390: FS, DS6520: FS, AC1050e: SS, SW2340a: FS, SW2340d: SS 33 |  |           |           |           |  |
|             | SW2390a                      | Install LCX Cable - CP7 to CP21                          | 61  | 16-Sep-25   | 28-Nov-25    | 11-Dec-24  | 07-Mar-25   |              |               | SW2390: SS 25  |  |           |           |           |  |



| Activity ID                   | Activity Name | Original Duration   | Early Start | Early Finish | Late Start | Late Finish | Actual Start | Actual Finish | Predecessor Details | 2025  |           |           |           |
|-------------------------------|---------------|---|-------------|--------------|------------|-------------|--------------|---------------|---------------------|---|-----------|-----------|-----------|
|                               |               |   |             |              |            |             |              |               |                     | Jul<br>43   | Aug<br>44 | Sep<br>45 | Oct<br>46 |
|                               | SW2390b       | Install RAD Feeder Cable - CP7 to CP21  | 61          | 16-Sep-25    | 28-Nov-25  | 11-Dec-24   | 07-Mar-25    |               |                     | SW2390a: SS   |           |           |           |
|                               | SW2390c       | Install RAD Equipment & Coupler - CP7 to CP21                                 | 51          | 16-Oct-25    | 15-Dec-25  | 10-Jan-25   | 24-Mar-25    |               |                     | SW2390b: SS 24  |           |           |           |
|                               | SW2390d       | RAD Connection & SCT - CP7 to CP21  | 26          | 16-Oct-25    | 15-Nov-25  | 10-Jan-25   | 22-Feb-25    |               |                     | SW2390c: SS, SW4090: SS   |           |           |           |
| West Bound                    |               | 120   | 01-Aug-25   | 29-Nov-25    | 17-Aug-24  | 21-May-25   | 02-Jun-25    |               |                     |   |           |           |           |
| CP Side                       |               | 108   | 01-Aug-25   | 15-Nov-25    | 28-Oct-24  | 21-May-25   | 23-Jun-25    |               |                     |   |           |           |           |
|                               | SW3230a       | SEC Camera - SCT Cable Test & Final Circuit Wiring - CP7 to CP21              | 71          | 01-Aug-25    | 15-Oct-25  | 26-Nov-24   | 22-Feb-25    | 23-Jun-25     |                     | SW3230: SS  |           |           |           |
|                               | SW3240b       | ET - SCT Cable Test & Final Circuit Wiring - CP7 to CP21                      | 71          | 01-Aug-25    | 15-Oct-25  | 28-Oct-24   | 10-Jan-25    | 23-Jun-25     |                     | SW3230a: SS   |           |           |           |
|                               | SW3260a       | VLSL - SCT Cable Test & Final Circuit Wiring - CP7 to CP21                    | 71          | 01-Aug-25    | 15-Oct-25  | 26-Nov-24   | 22-Feb-25    | 23-Jun-25     |                     | SW3230a: SS   |           |           |           |
|                               | SW4100a       | TCSS Cabinet - SCT Cable Test & Final Circuit Wiring - CP7 to CP21            | 71          | 01-Aug-25    | 15-Oct-25  | 28-Oct-24   | 10-Jan-25    | 23-Jun-25     |                     | AC1050j: SS, SW4100: SS   |           |           |           |
|                               | SW3230        | Install SEC Camera - CP7 to CP11  | 17          | 01-Aug-25    | 20-Aug-25  | 09-Jan-25   | 11-Feb-25    |               |                     | SW3200: FS, AC1050d: SS   |           |           |           |
|                               | SW3260        | Install VLSL - CP7 to CP11  | 14          | 01-Aug-25    | 16-Aug-25  | 24-Dec-24   | 10-Jan-25    |               |                     | SW3200: FS, AC1050g: SS, SW3210: SS 16, SW3240: SS                                  |           |           |           |
|                               | SW3230b       | SEC Camera - Physical Inspection - CP7 to CP21                                | 50          | 13-Sep-25    | 13-Nov-25  | 10-Jan-25   | 22-Mar-25    |               |                     | SW3230a: FF 24  |           |           |           |
|                               | SW3240c       | ET - Physical Inspection - CP7 to CP21  | 25          | 16-Oct-25    | 14-Nov-25  | 11-Jan-25   | 22-Feb-25    |               |                     | SW3240b: FS   |           |           |           |
|                               | SW3260b       | VLSL - Physical Inspection and Function Test - CP7 to CP21                    | 26          | 16-Oct-25    | 15-Nov-25  | 16-Apr-25   | 21-May-25    |               |                     | SW3260a: FS   |           |           |           |
|                               | SW4100b       | TCSS Cabinet - Physical Inspection - CP7 to CP21                              | 25          | 16-Oct-25    | 14-Nov-25  | 11-Jan-25   | 22-Feb-25    |               |                     | SW4100a: FS   |           |           |           |
| OHVD                          |               | 106   | 01-Aug-25   | 05-Nov-25    | 06-Sep-24  | 12-Feb-25   | 02-Jun-25    |               |                     |   |           |           |           |
|                               | SW4120        | Install LCX Bracket - CP7 to CP11   | 25          |              |            |             | 02-Jun-25    | 30-Jun-25     |                     | AC1050b: SS, SW3250: FS   |           |           |           |
|                               | SW3210a       | CCTV - SCT Cable Test & Final Circuit Wiring - CP7 to CP21                    | 80          | 01-Aug-25    | 05-Nov-25  | 04-Oct-24   | 08-Jan-25    |               |                     | SW3210: SS, SW3220a: SS   |           |           |           |
|                               | SW3220a       | Detection Camera - SCT Cable Test & Final Circuit Wiring - CP7 to CP21        | 80          | 01-Aug-25    | 05-Nov-25  | 06-Sep-24   | 11-Dec-24    |               |                     | SW3220: FS, SW2340d: SS   |           |           |           |
|                               | SW3250a       | Traffic Control Devices - SCT Cable Test & Final Circuit Wiring - CP7 to CP21 | 77          | 01-Aug-25    | 01-Nov-25  | 04-Oct-24   | 04-Jan-25    |               |                     | SW2460: SS, SW3250: SS, SW2340d: SS   |           |           |           |
|                               | SW4130        | Install LCX Cable - CP7 to CP11   | 26          | 23-Sep-25    | 24-Oct-25  | 10-Jan-25   | 12-Feb-25    |               |                     | SW4120: FS, SW4220: FS, SW4320: FS  |           |           |           |
| Service Gallery               |               | 94  | 01-Aug-25   | 29-Nov-25    | 17-Aug-24  | 16-Dec-24   | 10-Jul-25    |               |                     |   |           |           |           |
|                               | SW3240d       | ET - SCT Cable Test & Final Circuit Wiring - CP7 to CP21                      | 94          | 01-Aug-25    | 29-Nov-25  | 17-Aug-24   | 16-Dec-24    | 10-Jul-25     |                     | SW3240a: FS, SW2340d: SS  |           |           |           |
|                               | SW3290        | Install LCX Bracket - CP7 to CP21   | 61          | 18-Aug-25    | 30-Oct-25  | 26-Sep-24   | 07-Dec-24    |               |                     | AC1050h: SS, SW3270: FS, SW3250: FS, SW3240d: SS 33                                 |           |           |           |
|                               | SW3290a       | Cable Test & Install LCX Cable - CP7 to CP21                                  | 61          | 18-Aug-25    | 30-Oct-25  | 26-Sep-24   | 07-Dec-24    |               |                     | SW3290: SS  |           |           |           |
|                               | SW3290b       | Install RAD Feeder Cable - CP7 to CP21  | 61          | 18-Aug-25    | 30-Oct-25  | 26-Sep-24   | 07-Dec-24    |               |                     | SW3290a: SS   |           |           |           |
| Tunnel Section - CP11 to CP16 |               | 71  | 01-Aug-25   | 24-Oct-25    | 12-Nov-24  | 03-Mar-25   | 15-May-25    |               |                     |   |           |           |           |
| East Bound                    |               | 71  | 01-Aug-25   | 24-Oct-25    | 12-Nov-24  | 03-Mar-25   | 15-May-25    |               |                     |   |           |           |           |
| CP Side                       |               | 24  | 01-Aug-25   | 12-Sep-25    | 12-Nov-24  | 03-Mar-25   | 15-May-25    |               |                     |   |           |           |           |
|                               | SW2480        | Install ET (Road Level) - CP11 to CP16  | 16          | 01-Aug-25    | 06-Aug-25  | 12-Nov-24   | 16-Nov-24    | 15-May-25     |                     | SC1720: FF, DS4190: FS, DS6080: FS, DS6480: FS, AC1060i: SS                         |           |           |           |
|                               | SW4160        | Install SEC Camera - CP11 to CP16   | 17          | 21-Aug-25    | 09-Sep-25  | 12-Feb-25   | 03-Mar-25    |               |                     | SW2330: FS, AC1060d: SS   |           |           |           |
|                               | SW2420        | Install VLSL - CP11 to CP16   | 12          | 30-Aug-25    | 12-Sep-25  | 10-Jan-25   | 23-Jan-25    |               |                     | SW2400: FS, SC1210: FF, DS2810: FS, EM1650: FS, DS8250: FS, AC1060g: SS, SW2360: FS |           |           |           |
| OHVD                          |               | 71  | 01-Aug-25   | 24-Oct-25    | 16-Nov-24  | 22-Feb-25   | 01-Jul-25    |               |                     |   |           |           |           |
|                               | SW4170        | Install LCX Bracket - CP11 to CP18  | 45          | 01-Aug-25    | 22-Aug-25  | 16-Nov-24   | 07-Dec-24    | 01-Jul-25     |                     | SW4080: FS, AC1060b: SS   |           |           |           |
|                               | SW4180        | Install LCX Cable - CP11 to CP18  | 26          | 23-Sep-25    | 24-Oct-25  | 10-Jan-25   | 22-Feb-25    |               |                     | SW4170: FS, SW4270: FS, SW4080: FS, SW4090: SS                                      |           |           |           |
| West Bound                    |               | 71  | 01-Aug-25   | 24-Oct-25    | 12-Nov-24  | 03-Mar-25   | 15-May-25    |               |                     |   |           |           |           |
| CP Side                       |               | 32  | 01-Aug-25   | 09-Sep-25    | 12-Nov-24  | 03-Mar-25   | 15-May-25    |               |                     |   |           |           |           |
|                               | SW3360        | Install ET (Road Level) - CP11 to CP16  | 16          | 01-Aug-25    | 06-Aug-25  | 12-Nov-24   | 16-Nov-24    | 15-May-25     |                     | SW3240: FS, AC1060i: SS   |           |           |           |
|                               | SW3330        | Install VLSL - CP11 to CP16   | 12          | 16-Aug-25    | 29-Aug-25  | 10-Jan-25   | 23-Jan-25    |               |                     | SW3300: SS 18, AC1060g: SS, SW3260: SS 13   |           |           |           |
|                               | SW4210        | Install SEC Camera - CP11 to CP16   | 17          | 21-Aug-25    | 09-Sep-25  | 12-Feb-25   | 03-Mar-25    |               |                     | SW3230: FS, AC1060d: SS   |           |           |           |
| OHVD                          |               | 71  | 01-Aug-25   | 24-Oct-25    | 16-Nov-24  | 22-Feb-25   | 01-Jul-25    |               |                     |   |           |           |           |
|                               | SW4220        | Install LCX Bracket - CP11 to CP18  | 45          | 01-Aug-25    | 22-Aug-25  | 16-Nov-24   | 07-Dec-24    | 01-Jul-25     |                     | SW4120: FS, AC1060b: SS   |           |           |           |
|                               | SW4230        | Cable Test & Install LCX Cable - CP11 to CP18                                 | 26          | 23-Sep-25    | 24-Oct-25  | 10-Jan-25   | 22-Feb-25    |               |                     | SW4220: FS, SW4320: FS, SW4120: FS, SW4130: SS                                      |           |           |           |





| Activity ID                                | Activity Name                                       | Original Duration | Early Start | Early Finish | Late Start | Late Finish | Actual Start | Actual Finish | Predecessor Details  | 2025      |           |           |           |
|--|---|-------------------|-------------|--------------|------------|-------------|--------------|---------------|--|-----------|-----------|-----------|-----------|
|  |   |                   |             |              |            |             |              |               |  | Jul<br>43 | Aug<br>44 | Sep<br>45 | Oct<br>46 |
| Tunnel Section - CP16 to CP21              |   | 216               | 01-Aug-25   | 31-Oct-25    | 12-Nov-24  | 22-Mar-25   | 25-Feb-25    |               |  |           |           |           |           |
| East Bound                                 |   | 216               | 01-Aug-25   | 31-Oct-25    | 12-Nov-24  | 22-Mar-25   | 25-Feb-25    |               |  |           |           |           |           |
| CP Side                                    |   | 70                | 07-Aug-25   | 30-Oct-25    | 18-Nov-24  | 22-Mar-25   |              |               |  |           |           |           |           |
| SW2590                                     | Install ET (Road Level) - CP16 to CP21              | 70                | 07-Aug-25   | 30-Oct-25    | 18-Nov-24  | 22-Feb-25   |              |               | SC1720: FF, DS4190: FS, DS6080: FS, DS6480: FS, AC1070i: SS, SW2480: FS                |           |           |           |           |
| SW4260                                     | Install SEC Camera - CP16 to CP21                   | 17                | 10-Sep-25   | 29-Sep-25    | 04-Mar-25  | 22-Mar-25   |              |               | SW4160: FS, AC1070d: SS  |           |           |           |           |
| SW2520                                     | Install VSLS - CP16 to CP21                         | 14                | 13-Sep-25   | 29-Sep-25    | 24-Jan-25  | 22-Feb-25   |              |               | SW2510: SS 12, SC1210: FF, DS2810: FS, EM1650: FS, DS8250: FS, AC1070g: SS, SW2420: FS |           |           |           |           |
| OHVD                                       |   | 122               | 01-Aug-25   | 31-Oct-25    | 12-Nov-24  | 26-Feb-25   | 30-May-25    |               |  |           |           |           |           |
| SW2540                                     | Install Traffic Control Devices - CP16 to CP21      | 31                | 01-Aug-25   | 30-Oct-25    | 12-Nov-24  | 22-Feb-25   | 30-May-25    |               | SW2510: FS, SC1210: FF, DS2810: FS, EM1650: FS, DS8250: FS, AC1070b: SS, SW2460: FS    |           |           |           |           |
| SW2550                                     | Install CCTV Camera - CP16 to CP21                  | 23                | 01-Aug-25   | 31-Oct-25    | 14-Nov-24  | 26-Feb-25   | 30-May-25    |               | SC1470: FF, DS4090: FS, DS6440: FS, AC1070b: SS, SW2430: FS                            |           |           |           |           |
| SW4270                                     | Install LCX Bracket - CP18 to CP21                  | 26                | 23-Aug-25   | 22-Sep-25    | 09-Dec-24  | 09-Jan-25   |              |               | SW4170: FS, AC1070b: SS  |           |           |           |           |
| SW4280                                     | Install LCX Cable - CP18 to CP21                    | 26                | 23-Sep-25   | 24-Oct-25    | 10-Jan-25  | 22-Feb-25   |              |               | SW4270: FS, SW4170: FS, SW4080: FS, SW4180: SS   |           |           |           |           |
| Service Gallery                            |   | 17                | 01-Aug-25   | 30-Oct-25    | 26-Nov-24  | 08-Mar-25   | 25-Feb-25    |               |  |           |           |           |           |
| SW2530                                     | Install PA in Service Gallery - CP16 to CP21        | 17                | 01-Aug-25   | 30-Oct-25    | 26-Nov-24  | 08-Mar-25   | 25-Feb-25    |               | SC1860: FF, DS4240: FS, DS6480: FS, DS6120: FS, AC1070e: SS                            |           |           |           |           |
| SW2590a                                    | Install ET in Service Gallery - CP16 to CP21        | 17                | 01-Aug-25   | 30-Sep-25    | 09-Dec-24  | 22-Feb-25   | 26-Feb-25    |               | AC1070e: SS  |           |           |           |           |
| West Bound                                 |   | 216               | 01-Aug-25   | 31-Oct-25    | 12-Nov-24  | 22-Mar-25   | 26-Feb-25    |               |  |           |           |           |           |
| CP Side                                    |   | 70                | 07-Aug-25   | 30-Oct-25    | 18-Nov-24  | 22-Mar-25   |              |               |  |           |           |           |           |
| SW3470                                     | Install ET (Road Level) - CP16 to CP21              | 70                | 07-Aug-25   | 30-Oct-25    | 18-Nov-24  | 22-Feb-25   |              |               | AC1070i: SS, SW3360: FS  |           |           |           |           |
| SW3440                                     | Install VSLS - CP16 to CP21                         | 14                | 30-Aug-25   | 15-Sep-25    | 24-Jan-25  | 22-Feb-25   |              |               | SW3410: SS 12, AC1070g: SS, SW3330: FS   |           |           |           |           |
| SW4310                                     | Install SEC Camera - CP16 to CP21                   | 17                | 10-Sep-25   | 29-Sep-25    | 04-Mar-25  | 22-Mar-25   |              |               | SW4210: FS, AC1070d: SS  |           |           |           |           |
| OHVD                                       |   | 122               | 01-Aug-25   | 31-Oct-25    | 12-Nov-24  | 26-Feb-25   | 30-May-25    |               |  |           |           |           |           |
| SW3420                                     | Install CCTV Camera - CP16 to CP21                  | 23                | 01-Aug-25   | 31-Oct-25    | 14-Nov-24  | 26-Feb-25   | 30-May-25    |               | AC1070b: SS, SW3310: FS  |           |           |           |           |
| SW3480                                     | Install Traffic Control Devices - CP16 to CP21      | 31                | 01-Aug-25   | 30-Oct-25    | 12-Nov-24  | 22-Feb-25   | 30-May-25    |               | SW3410: FS, AC1070b: SS, SW3370: FS  |           |           |           |           |
| SW4320                                     | Install LCX Bracket - CP18 to CP21                  | 26                | 23-Aug-25   | 22-Sep-25    | 09-Dec-24  | 09-Jan-25   |              |               | SW4220: FS, AC1070b: SS  |           |           |           |           |
| SW4330                                     | Install LCX Cable - CP18 to CP21                    | 26                | 23-Sep-25   | 24-Oct-25    | 10-Jan-25  | 22-Feb-25   |              |               | SW4320: FS, SW4220: FS, SW4120: FS, SW4130: SS   |           |           |           |           |
| Service Gallery                            |   | 17                | 01-Aug-25   | 30-Oct-25    | 26-Nov-24  | 08-Mar-25   | 26-Feb-25    |               |  |           |           |           |           |
| SW3450                                     | Install PA in Service Gallery - CP16 to CP21        | 17                | 01-Aug-25   | 30-Oct-25    | 26-Nov-24  | 08-Mar-25   | 26-Feb-25    |               | AC1070h: SS  |           |           |           |           |
| SW3470a                                    | Install ET in Service Gallery - CP16 to CP21        | 17                | 01-Aug-25   | 30-Sep-25    | 09-Dec-24  | 22-Feb-25   | 26-Feb-25    |               | AC1070h: SS  |           |           |           |           |
| Tunnel Section - CP21 to CP26              |   | 77                | 01-Aug-25   | 01-Nov-25    | 26-Aug-24  | 21-May-25   |              |               |  |           |           |           |           |
| SW2920                                     | Inspect Civil Provisions & Submit Inspection Report | 3                 | 15-Sep-25   | 17-Sep-25    | 09-Sep-24  | 11-Sep-24   |              |               | AC1080a: SS  |           |           |           |           |
| SW2930                                     | Rectify Civil Provision Defects by Others           | 6                 | 18-Sep-25   | 24-Sep-25    | 12-Sep-24  | 19-Sep-24   |              |               | SW2920: FS   |           |           |           |           |
| East Bound                                 |   | 77                | 01-Aug-25   | 01-Nov-25    | 20-Sep-24  | 21-May-25   |              |               |  |           |           |           |           |
| East Bound - Tunnel Section - CP21 to CP24 |   | 77                | 01-Aug-25   | 01-Nov-25    | 17-Dec-24  | 21-May-25   |              |               |  |           |           |           |           |
| SW3980                                     | Install PA in Service Gallery                       | 15                | 01-Aug-25   | 18-Aug-25    | 20-Feb-25  | 08-Mar-25   |              |               | AC1080j: SS  |           |           |           |           |
| SW4010                                     | Install PABX in Service Gallery                     | 15                | 01-Aug-25   | 18-Aug-25    | 20-Mar-25  | 07-Apr-25   |              |               | AC1080j: SS  |           |           |           |           |
| SW4020                                     | Install Radio System in Service Gallery             | 15                | 01-Aug-25   | 18-Aug-25    | 06-Feb-25  | 22-Feb-25   |              |               | AC1080j: SS  |           |           |           |           |
| SW4040a                                    | Install ET (Service Gallery)                        | 8                 | 01-Aug-25   | 09-Aug-25    | 14-Feb-25  | 22-Feb-25   |              |               | AC1080j: SS  |           |           |           |           |
| SW3960                                     | Install Cable Containment (CP Side)                 | 15                | 25-Sep-25   | 14-Oct-25    | 17-Dec-24  | 04-Jan-25   |              |               | SW2930: FS   |           |           |           |           |
| SW3960a                                    | Install Cable Containment (NCP Side)                | 15                | 15-Oct-25   | 01-Nov-25    | 21-Jan-25  | 10-Feb-25   |              |               | SW3960: FS   |           |           |           |           |
| SW3970                                     | Install VSLS (CP Side)                              | 11                | 15-Oct-25   | 27-Oct-25    | 25-Jan-25  | 10-Feb-25   |              |               | SW3960: FS, SW3960: FF   |           |           |           |           |
| SW3990                                     | Install Traffic Control Devices                     | 11                | 15-Oct-25   | 27-Oct-25    | 11-Feb-25  | 22-Feb-25   |              |               | SW3960: FS   |           |           |           |           |
| SW4000                                     | Install CCTV Camera                                 | 11                | 15-Oct-25   | 27-Oct-25    | 26-Apr-25  | 10-May-25   |              |               | SW3960: FS   |           |           |           |           |
| SW4030                                     | Install Detection Camera                            | 11                | 15-Oct-25   | 27-Oct-25    | 06-Jan-25  | 17-Jan-25   |              |               | SW3960: FS   |           |           |           |           |



| Activity ID | Activity Name                              | Original Duration  | Early Start | Early Finish | Late Start | Late Finish | Actual Start | Actual Finish | Predecessor Details | 2025   |           |           |           |
|-------------|--|--|-------------|--------------|------------|-------------|--------------|---------------|---------------------|--|-----------|-----------|-----------|
|             |  |  |             |              |            |             |              |               |                     | Jul<br>43  | Aug<br>44 | Sep<br>45 | Oct<br>46 |
|             | SW4050                                     | Install SEC Camera   | 11          | 15-Oct-25    | 27-Oct-25  | 09-May-25   | 21-May-25    |               |                     | SW3960: FS   |           |           |           |
|             | East Bound - Tunnel Section - CP24 to CP26 |  | 75          | 01-Aug-25    | 30-Oct-25  | 20-Sep-24   | 07-Apr-25    |               |                     |  |           |           |           |
|             | SW2620                                     | Install PA in Service Gallery                                | 9           | 01-Aug-25    | 11-Aug-25  | 27-Feb-25   | 08-Mar-25    |               |                     | SC1860: FF, DS4240: FS, DS6480: FS, DS6120: FS, AC1080b: SS            |           |           |           |
|             | SW2650                                     | Install PABX in Service Gallery                              | 9           | 01-Aug-25    | 11-Aug-25  | 27-Mar-25   | 07-Apr-25    |               |                     | SC1590: FF, DS4140: FS, DS6040: FS, DS6480: FS, AC1080b: SS            |           |           |           |
|             | SW2680a                                    | Install ET (Service Gallery)                                 | 4           | 01-Aug-25    | 05-Aug-25  | 19-Feb-25   | 22-Feb-25    |               |                     | AC1080b: SS  |           |           |           |
|             | SW2600                                     | Install Cable Containment (CP Side)                          | 9           | 25-Sep-25    | 06-Oct-25  | 20-Sep-24   | 30-Sep-24    |               |                     | SC2480: FF, SW2930: FS, DS6404: FS, DS6540: FS                         |           |           |           |
|             | SW2600a                                    | Install Cable Containment (NCP Side)                         | 9           | 08-Oct-25    | 17-Oct-25  | 02-Oct-24   | 12-Oct-24    |               |                     | SW2600: FS   |           |           |           |
|             | SW2610                                     | Install VSLs (CP Side)                                       | 7           | 08-Oct-25    | 15-Oct-25  | 07-Feb-25   | 14-Feb-25    |               |                     | SW2600: FS, SC1210: FF, DS2810: FS, EM1650: FS, DS8250: FS, SW2600: FF |           |           |           |
|             | SW2630                                     | Install Traffic Control Devices                              | 7           | 08-Oct-25    | 15-Oct-25  | 21-Oct-24   | 28-Oct-24    |               |                     | SW2600: FS, SC1210: FF, DS2810: FS, EM1650: FS, DS8250: FS             |           |           |           |
|             | SW2640                                     | Install CCTV Camera  | 7           | 08-Oct-25    | 15-Oct-25  | 21-Oct-24   | 28-Oct-24    |               |                     | SC1470: FF, DS4090: FS, DS6440: FS, SW2600: FS                         |           |           |           |
|             | SW2670                                     | Install Detection Camera                                     | 7           | 08-Oct-25    | 15-Oct-25  | 21-Oct-24   | 28-Oct-24    |               |                     | SC2120: FF, DS4490: FS, DS6440: FS, DS7500: FS, SW2600: FS             |           |           |           |
|             | SW2660                                     | Install Radio System in Service Gallery                      | 9           | 13-Oct-25    | 22-Oct-25  | 13-Feb-25   | 22-Feb-25    |               |                     | SC1990: FF, DS4390: FS, DS6160: FS, DS6520: FS, AC1080b: SS            |           |           |           |
|             | SW2690                                     | Install SEC Camera   | 7           | 13-Oct-25    | 20-Oct-25  | 15-Mar-25   | 22-Mar-25    |               |                     | SC2390: FF, EM1130: FS, DS6320: FS, DS7410: FS, SW2600: FS             |           |           |           |
|             | SW2710                                     | Signal Cable Laying and Termination (CP21 to CP26) (CP Side) | 12          | 16-Oct-25    | 30-Oct-25  | 29-Oct-24   | 11-Nov-24    |               |                     | SW2600: FS, SC2480: FF, SW2640: FS, SW2670: FS, SW2630: FS             |           |           |           |
|             | SW2610a                                    | Install VSLs (NCP Side)                                      | 7           | 18-Oct-25    | 25-Oct-25  | 15-Feb-25   | 22-Feb-25    |               |                     | SW2610: FS, SW2600a: FS  |           |           |           |
|             | SW2680                                     | Install ET (Road Level)                                      | 4           | 18-Oct-25    | 22-Oct-25  | 19-Feb-25   | 22-Feb-25    |               |                     | SC1720: FF, DS4190: FS, DS6080: FS, DS6480: FS, SW2600a: FS            |           |           |           |
|             | West Bound                                 |  | 62          | 01-Aug-25    | 14-Oct-25  | 26-Aug-24   | 28-Apr-25    |               |                     |  |           |           |           |
|             | SW3620                                     | Inspect Civil Provisions & Submit Inspection Report          | 3           | 01-Aug-25    | 04-Aug-25  | 26-Aug-24   | 28-Aug-24    |               |                     | AC1080c: SS  |           |           |           |
|             | SW3630                                     | Rectify Civil Provision Defects by Others                    | 6           | 05-Aug-25    | 11-Aug-25  | 29-Aug-24   | 04-Sep-24    |               |                     | SW3620: FS   |           |           |           |
|             | West Bound - Tunnel Section - CP21 to CP24 |  | 43          | 01-Aug-25    | 19-Sep-25  | 05-Sep-24   | 07-Apr-25    |               |                     |  |           |           |           |
|             | SW3540                                     | Install PA in Service Gallery                                | 15          | 01-Aug-25    | 18-Aug-25  | 20-Feb-25   | 08-Mar-25    |               |                     | AC1080e: SS  |           |           |           |
|             | SW3550                                     | Install PABX in Service Gallery                              | 15          | 01-Aug-25    | 18-Aug-25  | 20-Mar-25   | 07-Apr-25    |               |                     | AC1080e: SS  |           |           |           |
|             | SW3560                                     | Install ET (Road Level)                                      | 8           | 01-Aug-25    | 09-Aug-25  | 14-Feb-25   | 22-Feb-25    |               |                     | AC1080i: SS  |           |           |           |
|             | SW3560a                                    | Install ET (Service Gallery)                                 | 8           | 01-Aug-25    | 09-Aug-25  | 14-Feb-25   | 22-Feb-25    |               |                     | AC1080e: SS  |           |           |           |
|             | SW3580                                     | Install Radio System in Service Gallery                      | 15          | 01-Aug-25    | 18-Aug-25  | 06-Feb-25   | 22-Feb-25    |               |                     | AC1080e: SS  |           |           |           |
|             | SW3500                                     | Install Cable Containment (CP Side)                          | 15          | 12-Aug-25    | 28-Aug-25  | 05-Sep-24   | 23-Sep-24    |               |                     | SW3630: FS   |           |           |           |
|             | SW3530                                     | Install VSLs (CP Side)                                       | 11          | 26-Aug-25    | 06-Sep-25  | 25-Jan-25   | 10-Feb-25    |               |                     | SW3500: SS 12, AC1080h: SS   |           |           |           |
|             | SW3500a                                    | Install Cable Containment (NCP Side)                         | 15          | 29-Aug-25    | 15-Sep-25  | 24-Sep-24   | 12-Oct-24    |               |                     | SW3500: FS   |           |           |           |
|             | SW3510                                     | Install CCTV Camera  | 11          | 29-Aug-25    | 10-Sep-25  | 16-Oct-24   | 28-Oct-24    |               |                     | SW3500: FS   |           |           |           |
|             | SW3520                                     | Install Detection Camera                                     | 11          | 29-Aug-25    | 10-Sep-25  | 16-Oct-24   | 28-Oct-24    |               |                     | SW3500: FS   |           |           |           |
|             | SW3590                                     | Install SEC Camera   | 11          | 29-Aug-25    | 10-Sep-25  | 11-Mar-25   | 22-Mar-25    |               |                     | SW3500: FS   |           |           |           |
|             | SW3570                                     | Install Traffic Control Devices                              | 11          | 02-Sep-25    | 13-Sep-25  | 16-Oct-24   | 28-Oct-24    |               |                     | SW3500: SS 18, SW3500: FS  |           |           |           |
|             | SW3530a                                    | Install VSLs (NCP Side)                                      | 11          | 08-Sep-25    | 19-Sep-25  | 11-Feb-25   | 22-Feb-25    |               |                     | SW3530: FS, AC1080h: SS  |           |           |           |
|             | West Bound - Tunnel Section - CP24 to CP26 |  | 62          | 01-Aug-25    | 14-Oct-25  | 20-Sep-24   | 28-Apr-25    |               |                     |  |           |           |           |
|             | SW3640                                     | Install Cable Containment (CP Side)                          | 9           | 01-Aug-25    | 11-Aug-25  | 20-Sep-24   | 30-Sep-24    |               |                     | AC1080f: SS  |           |           |           |
|             | SW3680                                     | Install PA in Service Gallery                                | 9           | 01-Aug-25    | 11-Aug-25  | 27-Feb-25   | 08-Mar-25    |               |                     | AC1080g: SS  |           |           |           |
|             | SW3690                                     | Install PABX in Service Gallery                              | 9           | 01-Aug-25    | 11-Aug-25  | 27-Mar-25   | 07-Apr-25    |               |                     | AC1080g: SS  |           |           |           |
|             | SW3700a                                    | Install ET (Service Gallery)                                 | 4           | 01-Aug-25    | 05-Aug-25  | 19-Feb-25   | 22-Feb-25    |               |                     | AC1080g: SS  |           |           |           |



| Activity ID                                | Activity Name | Original Duration   | Early Start | Early Finish | Late Start | Late Finish | Actual Start | Actual Finish | Predecessor Details  | 2025      |           |           |           |
|--|---------------|---|-------------|--------------|------------|-------------|--------------|---------------|--|-----------|-----------|-----------|-----------|
|  |               |   |             |              |            |             |              |               |  | Jul<br>43 | Aug<br>44 | Sep<br>45 | Oct<br>46 |
|  | SW3720        | Install Radio System in Service Gallery                       | 9           | 01-Aug-25    | 11-Aug-25  | 13-Feb-25   | 22-Feb-25    |               | AC1080g: SS  |           |           |           |           |
|  | SW3640a       | Install Cable Containment (NCP Side)                          | 9           | 12-Aug-25    | 21-Aug-25  | 02-Oct-24   | 12-Oct-24    |               | SW3640: FS   |           |           |           |           |
|  | SW3650        | Install CCTV Camera   | 7           | 12-Aug-25    | 19-Aug-25  | 21-Oct-24   | 28-Oct-24    |               | SW3640: FS   |           |           |           |           |
|  | SW3660        | Install Detection Camera                                      | 7           | 12-Aug-25    | 19-Aug-25  | 21-Oct-24   | 28-Oct-24    |               | SW3640: FS   |           |           |           |           |
|  | SW3710        | Install Traffic Control Devices                               | 7           | 12-Aug-25    | 19-Aug-25  | 21-Oct-24   | 28-Oct-24    |               | SW3640: FS   |           |           |           |           |
|  | SW3730        | Install SEC Camera  | 7           | 12-Aug-25    | 19-Aug-25  | 15-Mar-25   | 22-Mar-25    |               | SW3640: FS   |           |           |           |           |
|  | SW3670        | Install VSLs (CP Side)  | 7           | 15-Aug-25    | 22-Aug-25  | 07-Feb-25   | 14-Feb-25    |               | SW3640: SS 12  |           |           |           |           |
|  | SW3700        | Install ET (Road Level)                                       | 4           | 22-Aug-25    | 26-Aug-25  | 19-Feb-25   | 22-Feb-25    |               | SW3640a: FS  |           |           |           |           |
|  | SW3670a       | Install VSLs (NCP Side)                                       | 7           | 23-Aug-25    | 30-Aug-25  | 15-Feb-25   | 22-Feb-25    |               | SW3640a: FS, SW3670: FS  |           |           |           |           |
|  | SW3750        | Signal Cable Laying and Termination (CP21 to CP26) (CP Side)  | 12          | 15-Sep-25    | 27-Sep-25  | 29-Oct-24   | 11-Nov-24    |               | SW3640: FS, SW3650: FS, SW3660: FS, SW3710: FS, SW3510: FS, SW3520: FS, SW3570: FS, SW3500: FS |           |           |           |           |
|  | SW3740        | Install GOFS (CP21 to CP26)                                   | 12          | 29-Sep-25    | 14-Oct-25  | 15-Apr-25   | 28-Apr-25    |               | SW3750: FS, SW3640a: FS  |           |           |           |           |
|  | SW3750a       | Signal Cable Laying and Termination (CP21 to CP26) (NCP Side) | 12          | 29-Sep-25    | 14-Oct-25  | 12-Nov-24   | 25-Nov-24    |               | SW3750: FS, SW3640a: FS, SW3500a: FS   |           |           |           |           |
| Tunnel Section - CP26 to CP32              |               | 85  | 01-Aug-25   | 11-Nov-25    | 27-Aug-24  | 22-Mar-25   |              |               |  |           |           |           |           |
|  | SW2940        | Inspect Civil Provisions & Submit Inspection Report           | 1           | 01-Aug-25    | 01-Aug-25  | 02-Sep-24   | 02-Sep-24    |               | AC1090e: SS  |           |           |           |           |
|  | SW2950        | Rectify Civil Provision Defects by Others                     | 4           | 02-Aug-25    | 06-Aug-25  | 03-Sep-24   | 06-Sep-24    |               | SW2940: FS   |           |           |           |           |
| East Bound                                 |               | 85  | 01-Aug-25   | 11-Nov-25    | 07-Sep-24  | 22-Mar-25   |              |               |  |           |           |           |           |
| East Bound - Tunnel Section - CP26 to CP29 |               | 47  | 15-Sep-25   | 11-Nov-25    | 07-Sep-24  | 22-Mar-25   |              |               |  |           |           |           |           |
|  | SW2720        | Install Cable Containment (CP Side)                           | 14          | 15-Sep-25    | 30-Sep-25  | 07-Sep-24   | 24-Sep-24    |               | SC2480: FF, SW2950: FS, DS6404: FS, DS6540: FS, AC1090a: SS                                    |           |           |           |           |
|  | SW2720a       | Install Cable Containment (NCP Side)                          | 14          | 02-Oct-25    | 18-Oct-25  | 25-Sep-24   | 12-Oct-24    |               | SW2720: FS   |           |           |           |           |
|  | SW2730        | Install VSLs (CP Side)  | 8           | 02-Oct-25    | 11-Oct-25  | 05-Feb-25   | 13-Feb-25    |               | SW2720: FS, SC1210: FF, DS2810: FS, EM1650: FS, DS8250: FS                                     |           |           |           |           |
|  | SW2750        | Install Traffic Control Devices                               | 11          | 02-Oct-25    | 15-Oct-25  | 25-Oct-24   | 06-Nov-24    |               | SW2720: FS, SC1210: FF, DS2810: FS, EM1650: FS, DS8250: FS                                     |           |           |           |           |
|  | SW2760        | Install CCTV Camera   | 11          | 02-Oct-25    | 15-Oct-25  | 25-Oct-24   | 06-Nov-24    |               | SC1470: FF, DS4090: FS, DS6440: FS, SW2720: FS   |           |           |           |           |
|  | SW2810        | Install Detection Camera                                      | 11          | 02-Oct-25    | 15-Oct-25  | 25-Oct-24   | 06-Nov-24    |               | SC2120: FF, DS4490: FS, DS6440: FS, DS7500: FS, SW2720: FS                                     |           |           |           |           |
|  | SW2840        | Install PVMS  | 8           | 02-Oct-25    | 11-Oct-25  | 14-Feb-25   | 22-Feb-25    |               | SC1210: FF, EM1030: FS, DS2810: FS, EM1650: FS, DS8250: FS, SW2720: FS                         |           |           |           |           |
|  | SW2830        | Install SEC Camera  | 11          | 13-Oct-25    | 24-Oct-25  | 11-Mar-25   | 22-Mar-25    |               | SC2390: FF, EM1130: FS, DS6320: FS, DS7410: FS, SW2720: FS                                     |           |           |           |           |
|  | SW2740        | Install PA in Service Gallery                                 | 12          | 15-Oct-25    | 28-Oct-25  | 17-Jan-25   | 03-Feb-25    |               | SC1860: FF, DS4240: FS, DS6480: FS, DS6120: FS, AC1090b: SS                                    |           |           |           |           |
|  | SW2820a       | Install ET (Service Gallery)                                  | 8           | 15-Oct-25    | 23-Oct-25  | 14-Feb-25   | 22-Feb-25    |               | AC1090b: SS  |           |           |           |           |
|  | SW2790        | Signal Cable Laying and Termination (CP26 to CP29) (CP Side)  | 8           | 16-Oct-25    | 24-Oct-25  | 07-Nov-24   | 15-Nov-24    |               | SW2720: FS, SC2480: FF, SW2760: FS, SW2810: FS, SW2750: FS                                     |           |           |           |           |
|  | SW2730a       | Install VSLs (NCP Side)                                       | 8           | 20-Oct-25    | 28-Oct-25  | 14-Feb-25   | 22-Feb-25    |               | SW2720a: FS, SW2730: FS  |           |           |           |           |
|  | SW2820        | Install ET (Road Level)                                       | 8           | 20-Oct-25    | 28-Oct-25  | 14-Feb-25   | 22-Feb-25    |               | SC1720: FF, DS4190: FS, DS6080: FS, DS6480: FS, SW2720a: FS                                    |           |           |           |           |
|  | SW2770        | Install PABX in Service Gallery                               | 14          | 25-Oct-25    | 11-Nov-25  | 28-Jan-25   | 15-Feb-25    |               | SW2740: SS 9, SC1590: FF, DS4140: FS, DS6040: FS, DS6480: FS, AC1090b: SS                      |           |           |           |           |
|  | SW2780        | Install GOFS (CP26 to CP29)                                   | 8           | 25-Oct-25    | 04-Nov-25  | 08-Mar-25   | 17-Mar-25    |               | SC2570: FF, DS8560: FS, SW2720a: FS, SW2790: FS  |           |           |           |           |

Date

31-Jul-25

Revision

Rev. 0

Checked

MY

Approved

Page 10 of 14



| Activity ID  |  | Activity Name | Original Duration | Early Start | Early Finish | Late Start | Late Finish | Actual Start | Actual Finish | Predecessor Details | 2025      |           |           |           |
|--|--|---------------|-------------------|-------------|--------------|------------|-------------|--------------|---------------|---------------------|-----------|-----------|-----------|-----------|
|  |  |               |                   |             |              |            |             |              |               |                     | Jul<br>43 | Aug<br>44 | Sep<br>45 | Oct<br>46 |
| <div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div>&lt;</div> |  |               |                   |             |              |            |             |              |               |                     |           |           |           |           |

| Activity ID | Activity Name  | Original Duration   | Early Start | Early Finish | Late Start | Late Finish | Actual Start | Actual Finish | Predecessor Details   | 2025      |           |           |           |
|-------------|--|---|-------------|--------------|------------|-------------|--------------|---------------|---|-----------|-----------|-----------|-----------|
|             |  |   |             |              |            |             |              |               |   | Jul<br>43 | Aug<br>44 | Sep<br>45 | Oct<br>46 |
|             | SW3880   | Install PVMS  | 10          | 06-Sep-25    | 17-Sep-25  | 12-Feb-25   | 22-Feb-25    |               | SW3760: FS  |           |           |           |           |
|             | SW3840   | Install Radio System in Service Gallery                       | 18          | 10-Sep-25    | 30-Sep-25  | 03-Feb-25   | 22-Feb-25    |               | AC1090d: SS, SW3810: FS   |           |           |           |           |
|             | SW3790a  | Install VSLs (NCP Side)                                       | 11          | 19-Sep-25    | 02-Oct-25  | 11-Feb-25   | 22-Feb-25    |               | SW3790: FS  |           |           |           |           |
|             | SW3870   | Signal Cable Laying and Termination (CP26 to CP30) (CP Side)  | 10          | 24-Sep-25    | 06-Oct-25  | 02-Nov-24   | 13-Nov-24    |               | SW3760: FS, SW3770: FS, SW3780: FS, SW3830: FS  |           |           |           |           |
|             | SW3860   | Install GOFS (CP26 to CP30)                                   | 10          | 08-Oct-25    | 18-Oct-25  | 06-Mar-25   | 17-Mar-25    |               | SW3760a: FS, SW3870: FS   |           |           |           |           |
|             | SW3870a  | Signal Cable Laying and Termination (CP26 to CP30) (NCP Side) | 10          | 08-Oct-25    | 18-Oct-25  | 14-Nov-24   | 25-Nov-24    |               | SW3760a: FS, SW3870: FS   |           |           |           |           |
|             | SW3890   | Laying of Leaky Cable   | 10          | 08-Oct-25    | 18-Oct-25  | 12-Feb-25   | 22-Feb-25    |               | SW3760a: FS, SW3870: FS   |           |           |           |           |
|             | West Bound - Tunnel Section - CP30 to CP32 (CKL Main Tunnel) |   | 28          | 01-Aug-25    | 02-Sep-25  | 17-Sep-24   | 22-Mar-25    |               |   |           |           |           |           |
|             | SW3760b  | Install Cable Containmentment (CP Side)                       | 10          | 01-Aug-25    | 12-Aug-25  | 17-Sep-24   | 28-Sep-24    |               | AC1090g: SS   |           |           |           |           |
|             | SW3800a  | Install PA in Service Gallery                                 | 8           | 01-Aug-25    | 09-Aug-25  | 21-Jan-25   | 01-Feb-25    |               | AC1090h: SS   |           |           |           |           |
|             | SW3820c  | Install ET (Service Gallery)                                  | 5           | 01-Aug-25    | 06-Aug-25  | 18-Feb-25   | 22-Feb-25    |               | AC1090h: SS   |           |           |           |           |
|             | SW3810a  | Install PABX in Service Gallery                               | 9           | 11-Aug-25    | 20-Aug-25  | 03-Feb-25   | 12-Feb-25    |               | AC1090h: SS, SW3800a: FS  |           |           |           |           |
|             | SW3760c  | Install Cable Containmentment (NCP Side)                      | 10          | 13-Aug-25    | 23-Aug-25  | 30-Sep-24   | 12-Oct-24    |               | SW3760b: FS   |           |           |           |           |
|             | SW3770a  | Install CCTV Camera   | 8           | 13-Aug-25    | 21-Aug-25  | 05-Nov-24   | 13-Nov-24    |               | SW3760b: FS   |           |           |           |           |
|             | SW3780a  | Install Detection Camera                                      | 8           | 13-Aug-25    | 21-Aug-25  | 05-Nov-24   | 13-Nov-24    |               | SW3760b: FS   |           |           |           |           |
|             | SW3790b  | Install VSLs (CP Side)  | 6           | 13-Aug-25    | 19-Aug-25  | 10-Feb-25   | 15-Feb-25    |               | SW3760b: FS   |           |           |           |           |
|             | SW3820b  | Install ET (Road Level)                                       | 5           | 13-Aug-25    | 18-Aug-25  | 18-Feb-25   | 22-Feb-25    |               | SW3760b: FS   |           |           |           |           |
|             | SW3830a  | Install Traffic Control Devices                               | 8           | 13-Aug-25    | 21-Aug-25  | 05-Nov-24   | 13-Nov-24    |               | SW3760b: FS, SW3760b: FF  |           |           |           |           |
|             | SW3850a  | Install SEC Camera  | 8           | 13-Aug-25    | 21-Aug-25  | 14-Mar-25   | 22-Mar-25    |               | SW3760b: FS   |           |           |           |           |
|             | SW3880a  | Install PVMS  | 5           | 13-Aug-25    | 18-Aug-25  | 18-Feb-25   | 22-Feb-25    |               | SW3760b: FS   |           |           |           |           |
|             | SW3790c  | Install VSLs (NCP Side)                                       | 6           | 20-Aug-25    | 26-Aug-25  | 17-Feb-25   | 22-Feb-25    |               | SW3790b: FS   |           |           |           |           |
|             | SW3840a  | Install Radio System in Service Gallery                       | 9           | 21-Aug-25    | 30-Aug-25  | 13-Feb-25   | 22-Feb-25    |               | AC1090h: SS, SW3810a: FS  |           |           |           |           |
|             | SW3870b  | Signal Cable Laying and Termination (CP30 to CP32) (CP Side)  | 5           | 22-Aug-25    | 27-Aug-25  | 14-Nov-24   | 19-Nov-24    |               | SW3760b: FS, SW3770a: FS, SW3780a: FS, SW3830a: FS  |           |           |           |           |
|             | SW3860a  | Install GOFS (CP30 to CP32)                                   | 5           | 28-Aug-25    | 02-Sep-25  | 12-Mar-25   | 17-Mar-25    |               | SW3760c: FS, SW3870b: FS  |           |           |           |           |
|             | SW3870c  | Signal Cable Laying and Termination (CP30 to CP32) (NCP Side) | 5           | 28-Aug-25    | 02-Sep-25  | 20-Nov-24   | 25-Nov-24    |               | SW3760c: FS, SW3870b: FS  |           |           |           |           |
|             | SW3890a  | Laying of Leaky Cable   | 5           | 28-Aug-25    | 02-Sep-25  | 18-Feb-25   | 22-Feb-25    |               | SW3760c: FS, SW3870b: FS  |           |           |           |           |
|             | Tunnel Section - TSS/CKL Final Connection                    |   | 33          | 15-Sep-25    | 24-Oct-25  | 25-Sep-24   | 22-Mar-25    |               |   |           |           |           |           |
|             | West Bound   |   | 33          | 15-Sep-25    | 24-Oct-25  | 25-Sep-24   | 22-Mar-25    |               |   |           |           |           |           |
|             | SW3940a  | Remaining TCSS Installations (Service Gallery)                | 14          | 15-Sep-25    | 30-Sep-25  | 01-Mar-25   | 17-Mar-25    |               | AC1120a: SS   |           |           |           |           |
|             | SW3940   | Remaining TCSS Installations (Road Level)                     | 14          | 30-Sep-25    | 17-Oct-25  | 25-Sep-24   | 12-Oct-24    |               | AC1120: SS  |           |           |           |           |
|             | SW3950   | Cable Laying and Termination                                  | 5           | 20-Oct-25    | 24-Oct-25  | 18-Mar-25   | 22-Mar-25    |               | SW3860: FS, SW3890: FS, SW3870a: FS, SW3940: FS, SW3860a: FS, SW3890a: FS, SW3870c: FS, SW3940a: FS |           |           |           |           |
|             | West Ventilation Building                                    |   | 461         | 01-Aug-25    | 12-Nov-25  | 06-Sep-24   | 21-Apr-25    | 01-Apr-24     |   |           |           |           |           |
|             | Installation Works   |   | 461         | 01-Aug-25    | 12-Nov-25  | 06-Sep-24   | 21-Apr-25    | 01-Apr-24     |   |           |           |           |           |
|             | SW1650   | Install Cable Containments                                    | 24          | 01-Aug-25    | 05-Aug-25  | 06-Sep-24   | 10-Sep-24    | 01-Apr-24     | DS6400: FS, DS6540: FS  |           |           |           |           |
|             | SW1740   | Signal Cable Laying   | 15          | 01-Aug-25    | 27-Sep-25  | 26-Sep-24   | 25-Nov-24    | 24-Mar-25     | SW1650: SS  |           |           |           |           |
|             | SW1710a  | Install LCX Bracket   | 21          | 01-Aug-25    | 30-Sep-25  | 13-Dec-24   | 17-Feb-25    | 25-Apr-25     | SW4340: FS, DS3250: FS  |           |           |           |           |
|             | SW1730   | Install ET Equipment  | 12          | 01-Aug-25    | 14-Aug-25  | 27-Sep-24   | 12-Oct-24    |               | SC1720: FF, DS4190: FS, DS6080: FS, DS6480: FS, SW1690: SS  |           |           |           |           |
|             | SW1670   | Install Network Equipment                                     | 36          | 16-Aug-25    | 26-Sep-25  | 15-Oct-24   | 25-Nov-24    |               | SC1330: FF, DS4340: FS, DS4440: FS, SW1700: SS, SW1660: FS  |           |           |           |           |
|             | SW1680   | Install Manual Fallback Control Equipment                     | 24          | 16-Aug-25    | 12-Sep-25  | 29-Oct-24   | 25-Nov-24    |               | SC2240: FF, DS6240: FS, DS7370: FS, DS8310: FS, SW1700: SS, EM1110: FS                              |           |           |           |           |
|             | SW1700   | Install Operation Facilities Equipment                        | 14          | 16-Aug-25    | 01-Sep-25  | 15-Oct-24   | 30-Oct-24    |               | SC2680: FF, EM1120: FS, SW1730: FS 1  |           |           |           |           |
|             | SW1710b  | Install LCX Cable   | 28          | 04-Sep-25    | 08-Oct-25  | 13-Dec-24   | 16-Jan-25    |               | SW1710a: SS, DS3790: FS 5   |           |           |           |           |
|             | SW1710   | Install RAD Equipment & Coupler                               | 28          | 10-Oct-25    | 12-Nov-25  | 18-Jan-25   | 22-Feb-25    |               | SC1990: FF, DS4390: FS, DS6520: FS, SW1710b: FS 1   |           |           |           |           |







**GTECH Services (Hong Kong) Limited**

Remaining Work
  Critical Activity
  Actual Work
  Milestone

Page 13 of 14

| Activity ID | Activity Name | Original Duration                  | Early Start | Early Finish | Late Start | Late Finish | Actual Start | Actual Finish | Predecessor Details | 2025       |             |     |     |
|-------------|---------------|------------------------------------|-------------|--------------|------------|-------------|--------------|---------------|---------------------|------------|-------------|-----|-----|
|             |               |                                    |             |              |            |             |              |               |                     | Jul        | Aug         | Sep | Oct |
|             |               |                                    |             |              |            |             |              |               |                     | 43         | 44          | 45  | 46  |
| <div></div> | DS5160        | Submit ET System SCT Test Report   | 24          | 24-Oct-25    | 21-Nov-25  | 22-May-25   | 19-Jun-25    |               |                     | TC1370: FS | <div></div> |     |     |
|             | DS5170        | Submit CCTV System SCT Test Report | 24          | 25-Oct-25    | 22-Nov-25  | 22-May-25   | 19-Jun-25    |               |                     | TC1390: FS |             |     |     |



| Date      | Revision | Checked | Approved |
|-----------|----------|---------|----------|
| 31-Jul-25 | Rev. 0   | MY      |          |

Page 14 of 14

---

**APPENDIX O**  
**WASTE GENERATED IN THE**  
**REPORTING MONTH**

---



Trunk Road T2 and Infrastructure Works  
for Developments at the Former South Apron  
Contract No. ED/2018/04

Name of Department: CEDD

Monthly Summary Waste Flow Table for 2025 (KT)

| Month     | Actual Quantities of Inert C&D Materials Generated Monthly |  |                           |                             |                            |                          | Actual Quantities of C&D Wastes Generated Monthly |                                |             |                   |                                |
|-----------|--|--|---------------------------|-----------------------------|----------------------------|--------------------------|---|--------------------------------|-------------|-------------------|--------------------------------|
|           | a.Total Quantity Generated (a=c+d+e)                       | b. Hard Rock and Large Broken Concrete | c. Reused in the Contract | d. Reused in Other Projects | e. Disposed as Public Fill | f. Imported Fill         | g. Metals   | h. Paper / Cardboard Packaging | i. Plastics | j. Chemical Waste | k. Others, e.g. general refuse |
|           | (in '000m <sup>3</sup> )                                   | (in '000m <sup>3</sup> )               | (in '000m <sup>3</sup> )  | (in '000m <sup>3</sup> )    | (in '000m <sup>3</sup> )   | (in '000m <sup>3</sup> ) | (in '000kg)                                       | (in '000kg)                    | (in '000kg) | (in '000kg)       | (in '000m <sup>3</sup> )       |
| January   | 0.007  | 0.000                                  | 0.007                     | 0.000                       | 0.000                      | 0.000                    | 0.000   | 0.000                          | 0.000       | 0.000             | 0.061                          |
| February  | 0.000  | 0.000                                  | 0.000                     | 0.000                       | 0.000                      | 0.000                    | 0.000   | 0.000                          | 0.000       | 0.000             | 0.041                          |
| March     | 1.653  | 0.000                                  | 0.000                     | 1.653                       | 0.000                      | 0.000                    | 0.000   | 0.000                          | 0.000       | 0.000             | 0.060                          |
| April     | 0.000  | 0.000                                  | 0.000                     | 0.000                       | 0.000                      | 0.000                    | 0.000   | 0.000                          | 0.000       | 0.000             | 0.041                          |
| May       | 9.972  | 0.000                                  | 0.000                     | 9.936                       | 0.036                      | 0.000                    | 0.000   | 0.000                          | 0.000       | 0.000             | 0.047                          |
| June      | 10.558   | 0.000                                  | 0.000                     | 10.558                      | 0.000                      | 0.000                    | 0.000   | 0.000                          | 0.000       | 0.000             | 0.054                          |
| Sub-total | 22.190   | 0.000                                  | 0.007                     | 22.147                      | 0.036                      | 0.000                    | 0.000   | 0.000                          | 0.000       | 0.000             | 0.305                          |
| July      | 20.099   | 0.051                                  | 0.000                     | 19.792                      | 0.307                      | 0.000                    | 0.000   | 0.000                          | 0.000       | 0.000             | 0.066                          |
| August    |  |  |                           |                             |                            |                          |   |                                |             |                   |                                |
| September |  |  |                           |                             |                            |                          |   |                                |             |                   |                                |
| October   |  |  |                           |                             |                            |                          |   |                                |             |                   |                                |
| November  |  |  |                           |                             |                            |                          |   |                                |             |                   |                                |
| December  |  |  |                           |                             |                            |                          |   |                                |             |                   |                                |
| Total     | 42.290   | 0.051                                  | 0.007                     | 41.939                      | 0.343                      | 0.000                    | 0.000   | 0.000                          | 0.000       | 0.000             | 0.372                          |

Monthly Summary Waste Flow Table

Notes:

- (1)The performance targets are given in ER Appendix 8I Clause 14 and the EM&A Manual(s).
- (2)The waste flow table shall also include C&D materials to be imported for use at the Site.
- (3)Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material.
- (4)The Contractor shall also submit the latest forecast of the total amount of C&D materials expected to be generated from the Works, together with a breakdown of the nature where the total amount of C&D materials expected to be generated from the Works is equal to or exceeding 50,000 m<sup>3</sup>. (ER Part 8 Clause 8.8.5 (d) (ii) refers).

Monthly Summary Waste Flow Table For 2025

| Month     | Actual Quantities of Inert C&D Materials Generated Monthly |                              |  |                          |                          |                          | Actual Quantities of C&D Waste Generated Monthly |                               |                            |   |                       |                                 |                |                             |
|-----------|--|------------------------------|--|--------------------------|--------------------------|--------------------------|--|-------------------------------|----------------------------|---|-----------------------|---------------------------------|----------------|-----------------------------|
|           | Total Quantity Generated                                   | Broken Concrete (see Note 4) | Estimated Quantities (Broken Concrete) | Reused in the Contract   | Reused in other Projects | Disposed as Public Fill  | Metals   | Estimated Quantities (Metals) | Paper/ cardboard packaging | Estimated Quantities (Paper/ cardboard packaging) | Plastics (see Note 3) | Estimated Quantities (Plastics) | Chemical Waste | Others, e.g. general refuse |
|           | (in '000m <sup>3</sup> )                                   | (in '000m <sup>3</sup> )     | (in '000m <sup>3</sup> )               | (in '000m <sup>3</sup> ) | (in '000m <sup>3</sup> ) | (in '000m <sup>3</sup> ) | (in '000kg)                                      | (in '000kg)                   | (in '000kg)                | (in '000kg)                                       | (in '000kg)           | (in '000kg)                     | (in '000kg)    | ( tonne)                    |
| Jan-25    | 0  | 0                            | 0                                      | 0                        | 0                        | 0                        | 0  | 0                             | 0                          | 0   | 0                     | 0                               | 0              | 0.00                        |
| Feb-25    | 0  | 0                            | 0                                      | 0                        | 0                        | 0                        | 0  | 0                             | 0                          | 0   | 0                     | 0                               | 0              | 0.00                        |
| Mar-25    | 0  | 0                            | 0                                      | 0                        | 0                        | 0                        | 0  | 0                             | 0                          | 0   | 0                     | 0                               | 0              | 0.84                        |
| Apr-25    | 0  | 0                            | 0                                      | 0                        | 0                        | 0                        | 0  | 0                             | 0                          | 0   | 0                     | 0                               | 0              | 0                           |
| May-25    | 0  | 0                            | 0                                      | 0                        | 0                        | 0                        | 0  | 0                             | 0                          | 0   | 0                     | 0                               | 0              | 0                           |
| Jun-25    | 0  | 0                            | 0                                      | 0                        | 0                        | 0                        | 0  | 0                             | 0                          | 0   | 0                     | 0                               | 0              | 0.00                        |
| Sub-total | 0  | 0                            | 0                                      | 0                        | 0                        | 0                        | 0  | 0                             | 0                          | 0   | 0                     | 0                               | 0              | 0.84                        |
| Jul-25    | 0  | 0                            | 0                                      | 0                        | 0                        | 0                        | 0  | 0                             | 0                          | 0   | 0                     | 0                               | 0              | 0                           |
| Aug-25    |  |                              |  |                          |                          |                          |  |                               |                            |   |                       |                                 |                |                             |
| Sep-25    |  |                              |  |                          |                          |                          |  |                               |                            |   |                       |                                 |                |                             |
| Oct-25    |  |                              |  |                          |                          |                          |  |                               |                            |   |                       |                                 |                |                             |
| Nov-25    |  |                              |  |                          |                          |                          |  |                               |                            |   |                       |                                 |                |                             |
| Dec-25    |  |                              |  |                          |                          |                          |  |                               |                            |   |                       |                                 |                |                             |
| Total     | 0  | 0                            | 0                                      | 0                        | 0                        | 0                        | 0  | 0                             | 0                          | 0   | 0                     | 0                               | 0              | 0.84                        |

Notes:

- (1) The performance targets are given in PS Sub-clause 2(5) (c).
- (2) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.
- (3) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material.
- (4) Broken concrete for recycling into aggregates.